

No. 11-885
April 1999

Char-Lynn®
Hydraulic Motors



General Purpose Motors
H, S, and T Series

We Manufacture

Solutions

Hydraulics

Char-Lynn

S

C

h

y

d

r

a

u

n

i

c

s

r

a

d

y

H

H

Catalog of General Purpose Spool Valve Hydraulic Motors from One of the World's Leading Manufacturers of Off Highway Mobile Components — Eaton Corporation

In the late 1950's the original low speed, high torque hydraulic motor was developed from a pump gerotor element consisting of an internal gear ring and a mating gear or star. While attaching the internal gear ring to the housing as a non moving part, oil was ported to pressurize and turn the internal star in an orbit around a center point. This slow turning star coupled with a splined drive to the output shaft became the Char-Lynn® Orbit® motor.

A few years after this original Char-Lynn Orbit motor was introduced another original motor went into production. This motor had rolls incorporated into the internal ring gear. This element was identified by the name Geroler® and is a registered trade name of Eaton Corporation.

Motors with the Geroler element provide high starting and running torque. The Geroler element minimizes friction and thereby increases efficiency while providing smooth output shaft rotation even at very low speeds.


The newest Geroler motor, the "T Series", is included in this catalog. It features the latest innovations in Geroler technology. These innovations include optimized Geroler geometry with lower drive running angle for improved life and improved low speed performance. In addition, the improved housing and smaller diameter end cap results in increased envelope rigidity which improves efficiency under high pressure loads. All of these innovations come together to make the new T Series motor the highest performance motor in its class.



Spool Valve Motors

The function of the spool valve is to distribute pressurized fluid to and from the Geroler or gerotor displacement element. The valve has hydrodynamic bearings, and has infinite life when load ratings are not exceeded.

These motors incorporate the proven orbit motor principle to provide high torque at low speeds.

Motor shaft rotation can be instantly reversed by changing direction of input/output flow while generating equal torque in either direction. The displacements available provide a wide variety of speeds and torques from any Series motor.

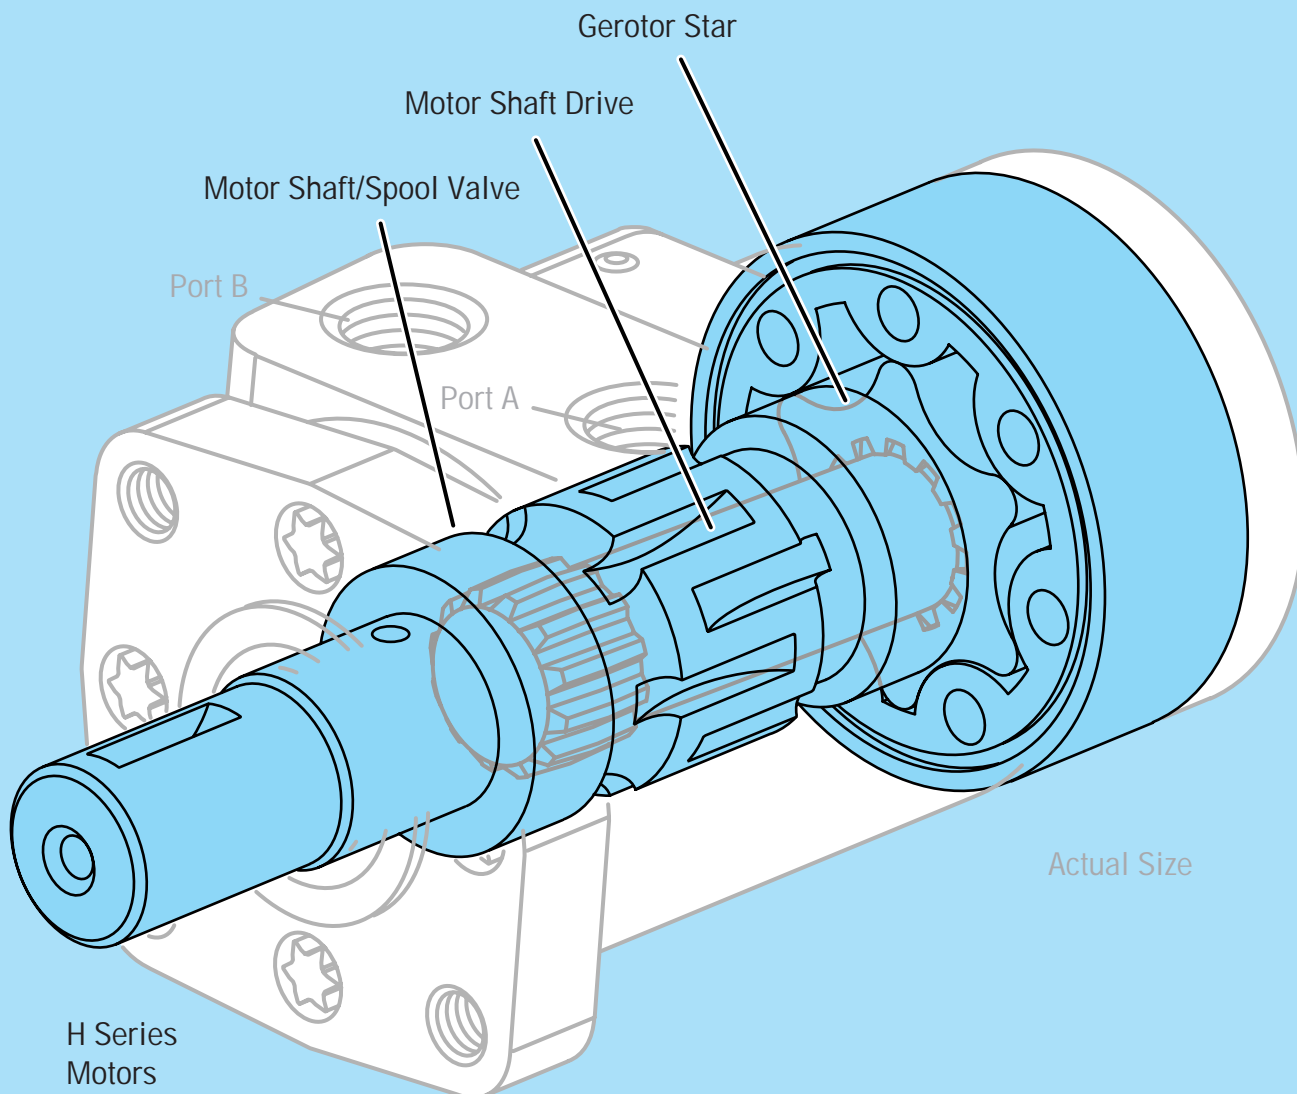

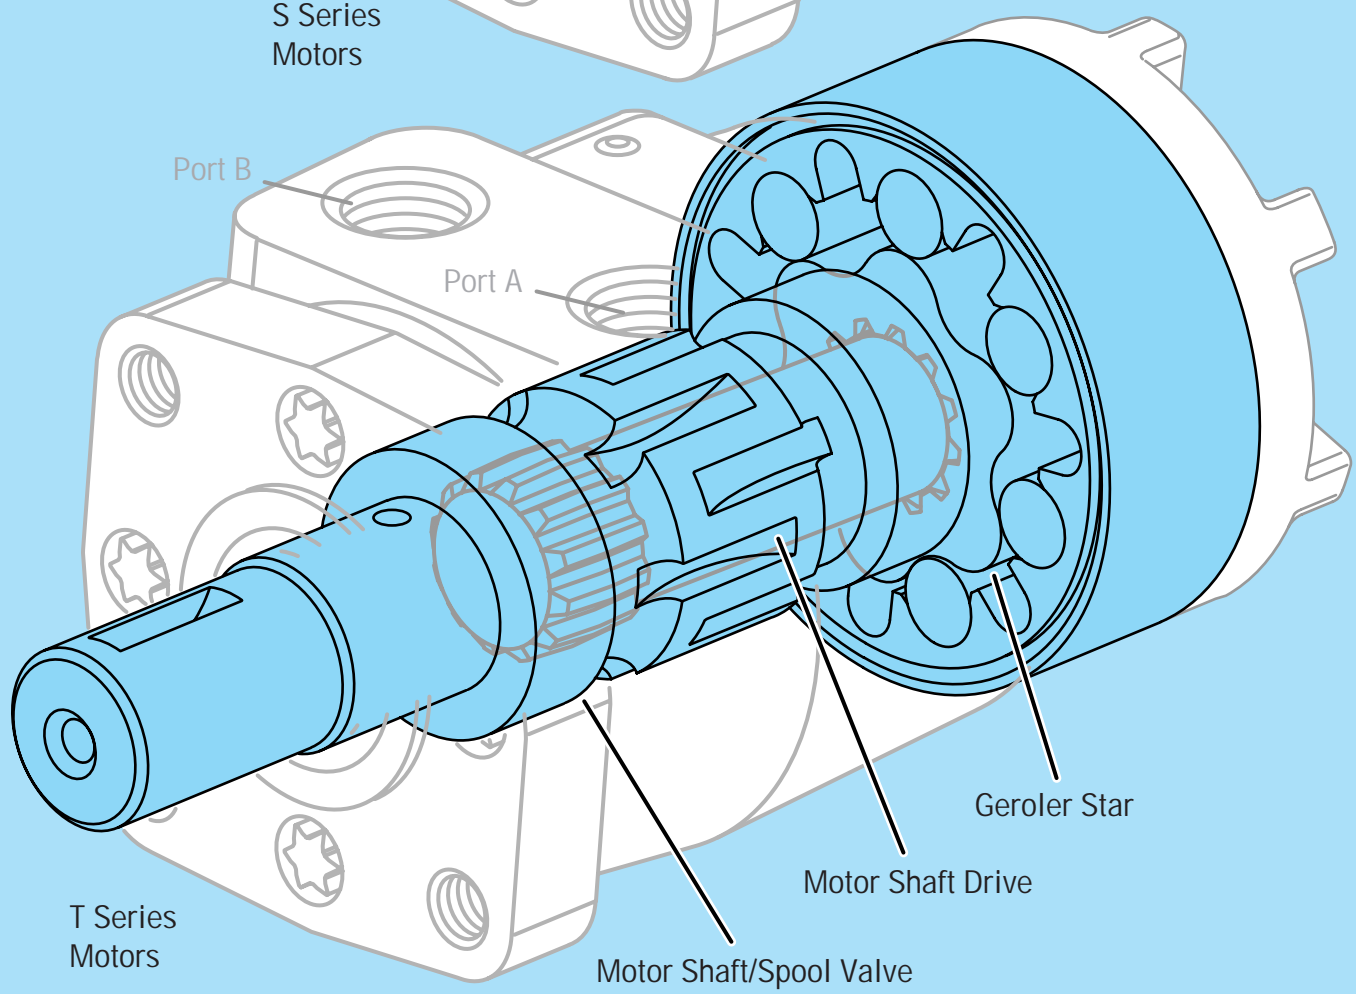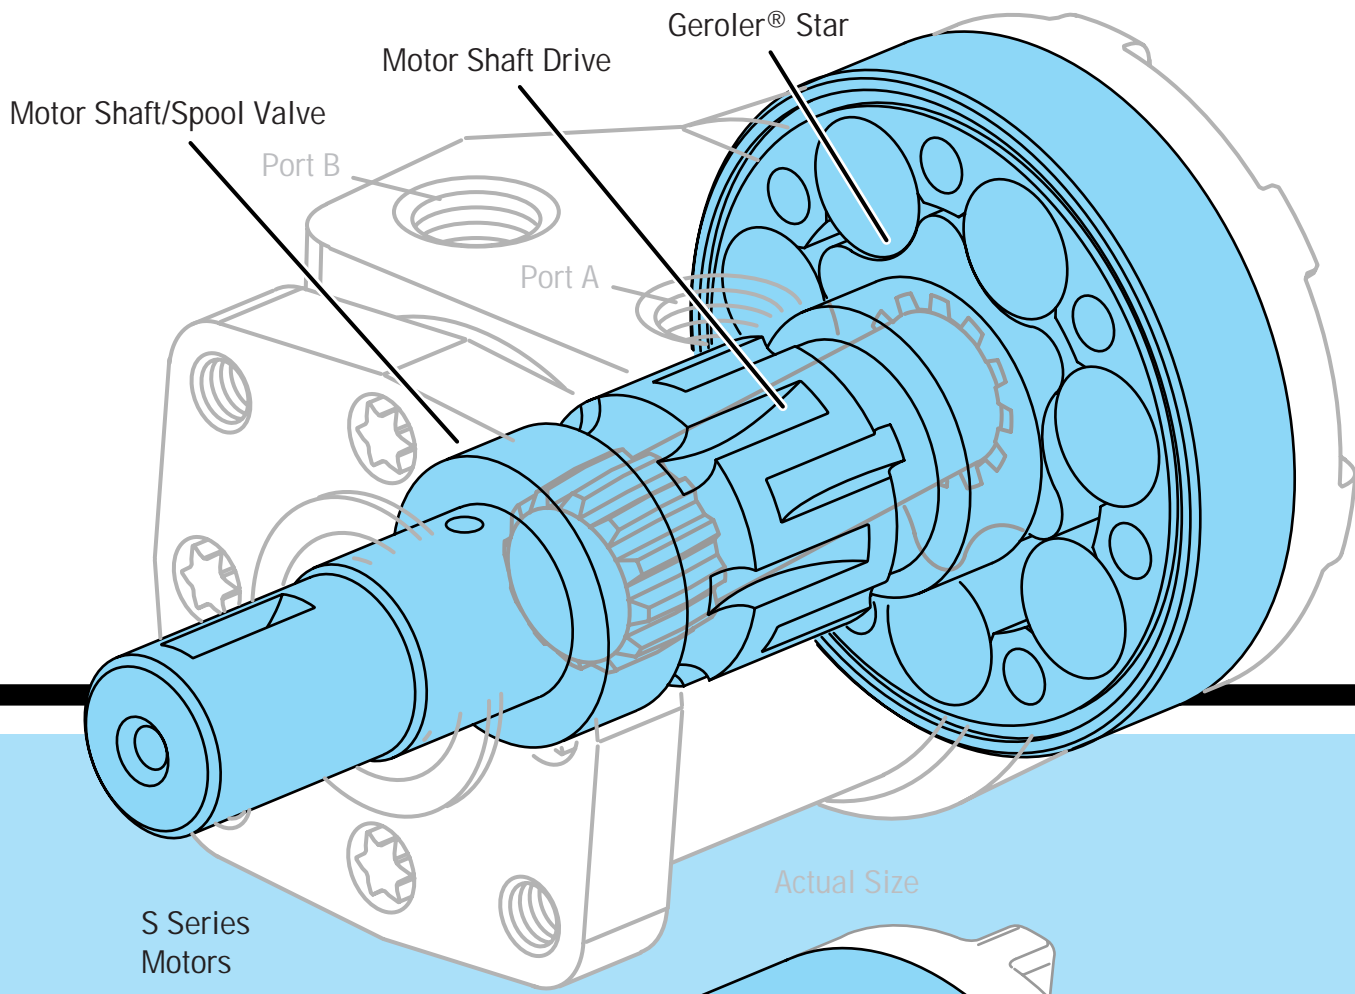

H Series



H

H Series

Gerotor Element	13 Displacements
Flow LPM [GPM]	57 [15] Continuous**
	76 [20] Intermittent*
Speed	Up to 1100 RPM
Pressure Bar [PSI] ...	125 [1800] Cont.
	165 [2400] Inter.
Torque Nm [lb-in]	400 [3600] Cont.
	520 [4600] Inter.

Char-Lynn H Series motors are economical, efficient, small, compact, and powerful, designed for medium duty applications. These motors have the industry proven spool valve design combined with state-of-art gerotors. In addition, a wide variety of mounting flanges, shafts, ports, and a low speed valving option provides design flexibility. Direction of shaft rotation and shaft speed can be controlled easily and smoothly throughout the speed range of the motor, and equipment can be driven direct eliminating costly mechanical components.

** Continuous— (Cont.) Continuous rating, motor may be run continuously at these ratings.

* Intermittent— (Inter.) Intermittent operation, 10% of every minute.

H Series Displacement Size = cubic centimeter per shaft revolution (cm^3/r)
= cubic inch per shaft revolution (in^3/r)

- 37 [2.2]
- 46 [2.8]
- 59 [3.6]
- 74 [4.5]
- 96 [5.9]
- 120 [7.3]
- 146 [8.9]
- 159 [9.7]
- 185 [11.3]
- 231 [14.1]
- 293 [17.9]
- 370 [22.6]
- 739 [45.1]

Mounting Flange

- 2 Bolt (Std.) 82,6 [3.25] Pilot Dia. and 13,59 [.535] Dia. Mounting Holes 106,2 [4.18] Dia. B.C.
- 4 Bolt (Std.) 44,4 [1.75] Pilot Dia. and 3/8-16 Mounting Holes 82,6 [3.25] Dia. B.C.
- 4 Bolt (Std.) 44,4 [1.75] Pilot Dia. and M10 x 1,5 Mounting Holes 82,6 [3.25] Dia. B.C.
- 2 Bolt (Std.) 101,6 [4.00] Pilot Dia. and 14,35 [.565] Dia. Mounting Holes 146,0 [5.75] Dia. B.C. (SAE B)
- 4 Bolt Magneto 82,6 [3.25] Pilot Dia. and 13,59 [.535] Dia. Mounting Holes 106,2 [4.18] Dia. B.C.

Output Shaft

- 1 inch Dia. Straight with Woodruff Key and 1/4-20 Threaded Hole
- 1 inch Dia. SAE 6B Splined with 1/4-20 Threaded Hole
- 1 inch Dia. Straight with 7,9 [.31] Dia. Crosshole 11,2 [.44] from End
- 1 inch Dia. Straight with 10,2 [.40] Dia. Crosshole 15,7 [.62] from End and 1/4-20 Threaded Hole
- 7/8 inch Dia. SAE B 13 T Splined
- 7/8 inch Dia. SAE B Straight with Square Key
- 1 inch Dia. Tapered with Woodruff Key and Nut
- 25mm Dia. Straight with 8mm Key and 8mm x 1,2 Threaded Hole
- 1 inch Dia. Straight with Woodruff Key and 1/4-20 Threaded Hole (Plated for Corrosion Protection)
- 25mm Dia. Straight with 8mm Key and 8mm x 1,2 Threaded Hole (Plated for Corrosion Protection)
- 1 inch Dia. Straight with 10,2 [.40] Dia. Crosshole 15,7 [.62] from End and 1/4-20 Threaded Hole (Plated...)
- 1 inch Dia. Tapered with Woodruff Key and Nut (Plated for Corrosion Protection)

Port Type

- 7/8-14 O-ring
- 1/2-14 NPTF
- Manifold (5/16-18 Mounting Threads)
- Manifold (M8 x 1,25 Mounting Threads)
- G 1/2 (BSP) O-ring
- 3/4-16 End Ported
- G 1/2 (BSP) End Ported

Case Drain


- No Case Drain
- 7/16-20 O-ring Port (End Cap)
- G 1/4 (BSP End Cap)

Special Features Available

- Free Running Gerotor
- Low Speed Valve
- Viton® Shaft Seal
- Reverse Rotation
- Flange Rotated 90°
- Corrosion Protected
- Speed Sensor
- High Pressure Shaft Seal

Viton® is a Registered Trade Name of Dupont Corp.

S Series

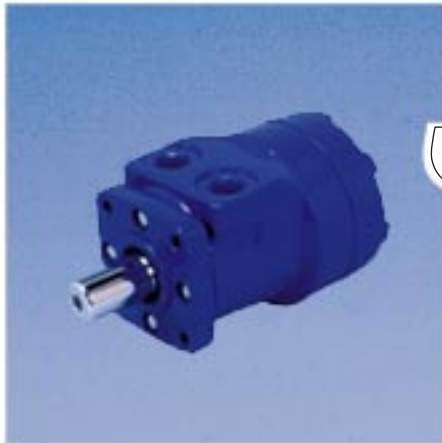

S Series

Geroler® Element	10 Displacements
Flow LPM [GPM]	55 [15] Continuous**
		75 [20] Intermittent*
Speed	Up to 1150 RPM
Pressure Bar [PSI]	135 [2000] Cont.
		170 [2500] Inter.
Torque Nm [lb-in]	450 [4000] Cont.
		515 [4550] Inter.


Char-Lynn S Series motor with Geroler offers the same advantage of low speed, high torque and compact size as the H Series with gerotor. In the Geroler element precision machined rollers form the displacement chambers. The rollers provide support with rolling contact as the star rotates, minimizing friction, providing high efficiency, especially at start-up and at low speeds.

- S Series Displacement Size = cubic centimeter per shaft revolution (cm³/r)
= cubic inch per shaft revolution ([in³/r])
- 59 [3.6]
 - 74 [4.5]
 - 97 [5.9]
 - 120 [7.3]
 - 146 [8.9]
 - 159 [9.7]
 - 185 [11.3]
 - 231 [14.1]
 - 293 [17.9]
 - 370 [22.6]
- Mounting Flange
- 2 Bolt (Std.) 82,6 [3.25] Pilot Dia. and 13,59 [.535] Dia. Mounting Holes 106,2 [4.18] Dia. B.C.
 - 4 Bolt (Std.) 44,4 [1.75] Pilot Dia. and 3/8-16 Mounting Holes 82,6 [3.25] Dia. B.C.
 - 4 Bolt (Std.) 44,4 [1.75] Pilot Dia. and M10 x 1,5 Mounting Holes 82,6 [3.25] Dia. B.C.
 - 2 Bolt (Std.) 101,6 [4.00] Pilot Dia. and 14,35 [.565] Dia. Mounting Holes 146,0 [5.75] Dia. B.C. (SAE B)
 - 4 Bolt Magneto 82,6 [3.25] Pilot Dia. and 13,59 [.535] Dia. Mounting Holes 106,2 [4.18] Dia. B.C.
- Output Shaft
- 1 inch Dia. Straight with Woodruff Key and 1/4-20 Threaded Hole
 - 1 inch Dia. SAE 6B Splined with 1/4-20 Threaded Hole
 - 1 inch Dia. Straight with 7,9 [.31] Dia. Crosshole 11,2 [.44] from End
 - 1 inch Dia. Straight with 10,2 [.40] Dia. Crosshole 15,7 [.62] from End and 1/4-20 Threaded Hole
 - 7/8 inch Dia. SAE B 13 T Splined
 - 7/8 inch Dia. SAE B Straight with Square Key
 - 1 inch Dia. Tapered with Woodruff Key and Nut
 - 25mm Dia. Straight with 8mm Key and 8mm x 1,2 Threaded Hole
 - 1 inch Dia. Straight with Woodruff Key and 1/4-20 Threaded Hole (Plated for Corrosion Protection)
- Port Type
- 7/8-14 O-ring
 - 1/2-14 NPTF
 - Manifold (5/16-18 Mounting Threads)
 - Manifold (M8 x 1,25 Mounting Threads)
 - G 1/2 (BSP) O-ring
- Case Drain
- No Case Drain
 - 7/16-20 O-ring Port (End Cap)
 - G 1/4 (BSP End Cap)
- Special Features Available
- Low Speed Valve
 - Viton® Shaft Seal
 - Reverse Rotation
 - Flange Rotated 90°
 - Corrosion Protected
 - High Pressure Shaft Seal

** Continuous— (Cont.) Continuous rating, motor may be run continuously at these ratings.

* Intermittent— (Inter.) Intermittent operation, 10% of every minute.

T Series



T Series

Geroler® Element	11 Displacements
Flow LPM [GPM]	55 [15] Continuous**
		75 [20] Intermittent*
Speed	Up to 1055 RPM
Pressure Bar [PSI]	...	155 [2250] Cont.
		190 [2750] Inter.
Torque Nm [lb-in]	440 [3905] Cont.
		510 [4515] Inter.

Char-Lynn T Series motors with the Geroler displacement element, offer the same advantage of low friction, and long life as the S Series in a compact size like the H Series. The T Series features the simplicity of Eaton's proven spool valve and a compact Geroler element that provides better drive life and smoother performance.

T Series Displacement Size = cubic centimeter per shaft revolution (cm^3/r)
 = cubic inch per shaft revolution ($[\text{in}^3/\text{r}]$)

- 36 [2.2]
- 49 [3.0]
- 66 [4.0]
- 80 [4.9]
- 102 [6.2]
- 131 [8.0]
- 157 [9.6]
- 195 [11.9]
- 244 [14.9]
- 306 [18.7]
- 370 [22.6]

Mounting Flange

- 2 Bolt (Std.) 82,6 [3.25] Pilot Dia. and 13,59 [.535] Dia. Mounting Holes 106,2 [4.18] Dia. B.C.
- 4 Bolt (Std.) 44,4 [1.75] Pilot Dia. and 3/8-16 Mounting Holes 82,6 [3.25] Dia. B.C.
- 4 Bolt (Std.) 44,4 [1.75] Pilot Dia. and M10 x 1,5 Mounting Holes 82,6 [3.25] Dia. B.C.
- 2 Bolt (Std.) 101,6 [4.00] Pilot Dia. and 14,35 [.565] Dia. Mounting Holes 146,0 [5.75] Dia. B.C. (SAE B)
- 4 Bolt Magneto 82,6 [3.25] Pilot Dia. and 13,59 [.535] Dia. Mounting Holes 106,2 [4.18] Dia. B.C.

Output Shaft

- 1 inch Dia. Straight with Woodruff Key and 1/4-20 Threaded Hole
- 1 inch Dia. SAE 6B Splined with 1/4-20 Threaded Hole
- 1 inch Dia. Straight with 7,9 [.31] Dia. Crosshole 11,2 [.44] from End
- 1 inch Dia. Straight with 10,2 [.40] Dia. Crosshole 15,7 [.62] from End and 1/4-20 Threaded Hole
- 7/8 inch Dia. SAE B 13 T Splined
- 7/8 inch Dia. SAE B Straight with Square Key
- 1 inch Dia. Tapered with Woodruff Key and Nut
- 25mm Dia. Straight with 8mm Key and 8mm x 1,2 Threaded Hole
- 1 inch Dia. Straight with Woodruff Key and 1/4-20 Threaded Hole (Plated for Corrosion Protection)

Port Type

- 7/8-14 O-ring
- 1/2-14 NPTF
- Manifold (5/16-18 Mounting Threads)
- Manifold (M8 x 1,25 Mounting Threads)
- G 1/2 (BSP) O-ring

Case Drain

- No Case Drain
- 7/16-20 O-ring Port (End Cap)
- G 1/4 (BSP End Cap)

Special Features Available

- Low Speed Valve
- Viton® Shaft Seal
- Reverse Rotation
- Flange Rotated 90°
- Corrosion Protected
- Speed Sensor
- High Pressure Shaft Seal

** Continuous— (Cont.) Continuous rating, motor may be run continuously at these ratings.

* Intermittent— (Inter.) Intermittent operation, 10% of every minute.

Shaft Seal
— H, S, and T Series

The time proven shaft seal design and construction allow the motors to withstand high back pressures without an external case drain. The motors can be connected together in series, or parallel to one another. The H, S, and T Series shaft seal has a patented feature which allows the seal lip to follow shaft deflection and provide better sealing under those conditions. A high pressure shaft seal is available for applications that have intermittent high case pressures above 105 bar [1500 PSI].

Low Speed Valving
— Option H, S, and T Series

The low speed valving option provides smooth low speed performance while maintaining high torque. Designed to run continuously at up to 200 RPM at standard rated pressures and reduced flows, providing smooth operation at low speeds. Furthermore, they resist slippage and have more momentary load holding ability than the standard H, and S Series motors. Motors with this valving are not intended for low pressure applications (41 Bar [600 PSI] Minimum).

Free Running Motors
— H, S, and T Series

H Series, S Series and T Series motors can be ordered with a special gerotor (H Series), or Geroler (S, and T Series) to permit free running of the output shaft. With this special feature, performance might be affected when extreme conditions exist. Overall efficiency may be reduced slightly.

Corrosion Protected
— H, S, and T Series

H Series, S Series, and T Series motors are available with a corrosion resistant coating for use in an hostile environment. This coating protects the motor from salt, water, and various chemicals. It is especially effective in marine, food processing, car wash, fishing, and agricultural applications. Shaft plating helps eliminate seal damage caused by these caustic or acid materials in the shaft sealing area. Corrosion protected motors are available with just the output shaft plated, or protected with an entire motor exterior coating.

Speed Sensor
— H, S, and T Series


The H, and T Series motors are available with a rugged digital sensor for monitoring motor shaft speed. Compatible with vehicle electrical systems, this feature is ideal for applications where speeds need to be accurately known.

Catalog Contents

	H Series	S Series	T Series
Specifications	page 8	page 14	page 20
Performance Data	9-11	15-17	21-25
Dimensions —Product (Mtg., Shafts, and Ports Listed Below)	12	18	26
Shaft Rotation (Standard)	12	18	26
Shaft Rotation (Reversed from Std.)	37	38	39
Product Numbers (Standard Units)	13	19	21
Specifications H, S and T Series with Low Speed Valving — Product Numbers S Series and T Series w/LSV	28	28	28
Shaft Side Load Capacity	29	29	29
Dimensions —Shafts	30-31	30-31	30-31
Dimensions —Mtg. Options/Mtg. Kit	32-33	32-33	32-33
Dimensions —Ports	33-34	33-34	33-34
Case Pressure and Case Drain	34-35	34-35	34-35
Speed Sensor	35	—	35
Fluid Recommendations	36	36	36
Model Code (Special* —Orders)	37	38	39

* Contact your Eaton Representative

Specifications H Series

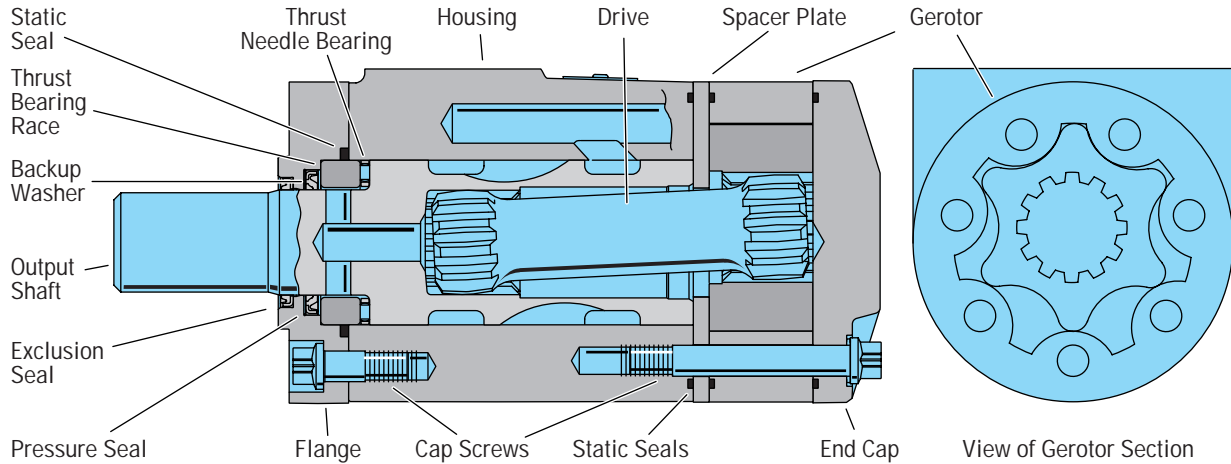

Specification Data—H Series

Displ. cm ³ /r [in ³ /r]		36 [2.2]	46 [2.8]	59 [3.6]	74 [4.5]	97 [5.9]	120 [7.3]	146 [8.9]	159 [9.7]	185 [11.3]	231 [14.1]	293 [17.9]	370 [22.6]	739 [45.1]
Max. Speed (RPM) @ Continuous Flow		1021	969	953	760	585	469	385	353	304	243	192	152	74
Flow LPM [GPM]	Continuous	38 [10]	45 [12]	57 [15]	57 [15]	57 [15]	57 [15]	57 [15]	57 [15]	57 [15]	57 [15]	57 [15]	57 [15]	57 [15]
	Intermittent	38 [10]	53 [14]	64 [17]	68 [18]	68 [18]	76 [20]	76 [20]	76 [20]	76 [20]	76 [20]	76 [20]	76 [20]	76 [20]
Torque Nm [lb-in]	Continuous	56 [497]	73 [650]	91 [802]	118 [1044]	155 [1368]	192 [1699]	221 [1954]	233 [2059]	265 [2343]	302 [2669]	351 [3110]	407 [3604]	389 [3440]
	Intermittent **	75 [668]	99 [876]	122 [1076]	158 [1401]	207 [1829]	257 [2278]	300 [2653]	319 [2824]	356 [3151]	415 [3671]	466 [4121]	484 [4283]	520 [4600]
Min. Starting Torque Nm[lb-in]	@ Cont. Pressure	46 [410]	59 [520]	76 [670]	95 [840]	124 [1100]	154 [1360]	176 [1560]	186 [1650]	211 [1870]	238 [2110]	282 [2500]	330 [2920]	316 [2800]
	@ Int. Pressure	63 [560]	81 [720]	104 [920]	130 [1150]	171 [1510]	210 [1860]	246 [2180]	262 [2320]	293 [2590]	339 [3000]	388 [3430]	408 [3610]	434 [3840]
Pressure Δ Bar [Δ PSI]	Continuous*	124 [1800]	124 [1800]	124 [1800]	124 [1800]	124 [1800]	124 [1800]	117 [1700]	114 [1650]	110 [1600]	100 [1450]	93 [1350]	86 [1250]	41 [600]
	Intermittent**	165 [2400]	165 [2400]	165 [2400]	165 [2400]	165 [2400]	165 [2400]	159 [2300]	155 [2250]	148 [2150]	138 [2000]	124 [1800]	103 [1500]	55 [800]
Weight kg [lb]		5,1 [11.2]	5,1 [11.2]	5,2 [11.5]	5,2 [11.5]	5,4 [11.8]	5,5 [12.1]	5,6 [12.4]	5,7 [12.5]	5,8 [12.8]	6,0 [13.3]	6,3 [14.0]	6,7 [14.7]	8,4 [18,6]

Maximum Case Pressure - without Case Drain — 103 Bar [1500 PSI] — See Page 34-35

* Maximum intermittent pressure at motor inlet port of 172 Bar [2500 PSI] without regard to Δ Bar [Δ PSI] and/or back pressure ratings or combination thereof.

** A simultaneous maximum torque and maximum speed NOT recommended.

6B Splined or Tapered shafts are recommended whenever operating above 282 Nm [2500 lb-in] of torque, especially for those applications subject to frequent reversals (see page 30).

Δ Bar [Δ PSI]— True pressure difference between inlet port and outlet port.

Continuous Rating — Motor may be run continuously at these ratings.

Intermittent Operation — 10% of every minute.

Recommended Fluids — Premium quality, anti-wear type hydraulic oil. Minimum oil viscosity (at operating

temperature) should be the highest of the following: 100 SUS or $\frac{300 \times \text{Bar}}{\text{RPM}} = \text{SUS}$ $\left[\frac{20 \times \text{PSI}}{\text{RPM}} = \text{SUS} \right]$ (see page 36).

Recommended Maximum System Operating Temp. — Is 82° C [180° F]

Recommended Filtration — per ISO Cleanliness Code, level 18/13

To assure best motor life, run motor for approximately one hour at 30% of rated pressure before application to full load. Be sure motor is filled with fluid prior to any load applications.

Performance Data H Series

Motors run with high efficiency in all areas designated with a number for torque and speed, however for best motor life select a motor to run with a torque and speed range shown in the light blue area.

36 cm³/r [2.2 in³/r]
Δ Pressure Bar [PSI]

		[200]	[400]	[600]	[800]	[1000]	[1200]	[1400]	[1600]	[1800]	[2400]
		14	28	41	55	69	83	97	110	124	165
Flow LPM [GPM]	[2]	[49]	[103]	[162]	[189]	[270]	[325]	[379]	[432]	[489]	[650]
	7,6	6	12	18	21	31	37	43	49	55	73
Max. Continuous	[4]	[47]	[106]	[160]	[191]	[274]	[327]	[384]	[439]	[495]	[654]
	15,1	5	12	18	22	31	37	43	50	56	74
Max. Inter-mittent	[6]	[44]	[102]	[158]	[188]	[272]	[328]	[383]	[440]	[496]	[661]
	22,7	5	12	18	21	31	37	43	50	56	75
Max. Inter-mittent	[8]	[40]	[97]	[153]	[184]	[270]	[326]	[383]	[440]	[497]	[668]
	30,3	5	11	17	21	31	37	43	50	56	75
Max. Inter-mittent	[10]	[36]	[90]	[148]	[180]	[265]	[322]	[380]	[438]	[495]	[664]
	37,9	4	10	17	20	30	36	43	49	56	75

[90] Torque [lb-in]
10 Nm
1021 Speed RPM

46 cm³/r [2.8 in³/r]
Δ Pressure Bar [PSI]

		[200]	[400]	[600]	[800]	[1000]	[1200]	[1400]	[1600]	[1800]	[2400]
		14	28	41	55	69	83	97	110	124	165
Flow LPM [GPM]	[2]	[64]	[136]	[212]	[284]	[355]	[426]	[497]	[567]	[641]	[852]
	7,6	7	15	24	32	40	48	56	64	72	96
Max. Continuous	[4]	[61]	[139]	[209]	[286]	[359]	[429]	[503]	[576]	[649]	[857]
	15,1	7	16	24	32	41	48	57	65	73	97
Max. Inter-mittent	[6]	[58]	[134]	[207]	[282]	[356]	[430]	[502]	[577]	[650]	[867]
	22,7	7	15	23	32	40	49	57	65	73	98
Max. Inter-mittent	[8]	[52]	[128]	[200]	[276]	[354]	[428]	[502]	[577]	[651]	[876]
	30,3	6	14	23	31	40	48	57	65	74	99
Max. Inter-mittent	[10]	[47]	[118]	[194]	[269]	[347]	[423]	[498]	[575]	[649]	[871]
	37,9	5	13	22	30	39	48	56	65	73	98
Max. Inter-mittent	[12]	[36]	[109]	[188]	[260]	[340]	[417]	[492]	[567]	[643]	[864]
	45,4	4	12	21	29	38	47	56	64	73	97
Max. Inter-mittent	[14]	[25]	[98]	[175]	[249]	[327]	[404]	[481]	[559]	[634]	
	53,0	3	11	20	28	37	46	55	63	72	

59 cm³/r [3.6 in³/r]
Δ Pressure Bar [PSI]

		[200]	[400]	[600]	[800]	[1000]	[1200]	[1400]	[1600]	[1800]	[2400]
		14	28	41	55	69	83	97	110	124	165
Flow LPM [GPM]	[2]	[79]	[169]	[260]	[305]	[437]	[526]	[616]	[704]	[796]	[1055]
	7,6	9	19	29	34	49	59	70	80	90	119
Max. Continuous	[4]	[76]	[168]	[257]	[307]	[441]	[529]	[620]	[710]	[800]	[1065]
	15,1	9	19	29	35	50	60	70	80	90	120
Max. Inter-mittent	[6]	[73]	[161]	[252]	[303]	[439]	[529]	[618]	[709]	[802]	[1069]
	22,7	8	18	28	34	50	60	70	80	91	121
Max. Inter-mittent	[8]	[64]	[151]	[243]	[294]	[428]	[519]	[609]	[701]	[794]	[1076]
	30,3	7	17	27	33	48	59	69	79	90	122
Max. Inter-mittent	[10]	[57]	[141]	[234]	[283]	[419]	[512]	[602]	[693]	[786]	[1071]
	37,9	6	16	26	32	47	58	68	78	89	121
Max. Inter-mittent	[12]	[45]	[131]	[227]	[274]	[409]	[505]	[593]	[684]	[778]	[1058]
	45,4	5	15	26	31	46	57	67	77	88	120
Max. Inter-mittent	[14]	[33]	[118]	[213]	[266]	[396]	[492]	[583]	[676]	[770]	[1055]
	53,0	4	13	24	30	45	56	66	76	87	119
Max. Inter-mittent	[15]	[29]	[111]	[205]	[260]	[389]	[486]	[576]	[670]	[765]	[1055]
	56,8	3	13	23	29	44	55	65	76	86	119
Max. Inter-mittent	[20]	[17]	[98]	[192]	[252]	[377]	[475]	[567]	[660]	[757]	
	75,7	2	11	22	28	43	54	64	75	86	

74 cm³/r [4.5 in³/r]
Δ Pressure Bar [PSI]

		[200]	[400]	[600]	[800]	[1000]	[1200]	[1400]	[1600]	[1800]	[2400]
		14	28	41	55	69	83	97	110	124	165
Flow LPM [GPM]	[2]	[103]	[220]	[339]	[454]	[569]	[685]	[801]	[916]	[1036]	[1373]
	7,6	12	25	38	51	64	77	91	103	117	155
Max. Continuous	[4]	[99]	[219]	[335]	[457]	[574]	[689]	[808]	[925]	[1042]	[1386]
	15,1	11	25	38	52	65	78	91	105	118	157
Max. Inter-mittent	[6]	[94]	[210]	[328]	[451]	[571]	[689]	[805]	[924]	[1044]	[1392]
	22,7	11	24	37	51	65	78	91	104	118	157
Max. Inter-mittent	[8]	[86]	[196]	[319]	[438]	[558]	[676]	[793]	[913]	[1033]	[1401]
	30,3	10	22	36	49	63	76	90	103	117	158
Max. Inter-mittent	[10]	[74]	[183]	[310]	[422]	[545]	[667]	[784]	[903]	[1024]	[1394]
	37,9	8	21	35	48	62	75	89	102	116	158
Max. Inter-mittent	[12]	[58]	[171]	[295]	[408]	[533]	[657]	[773]	[891]	[1013]	[1377]
	45,4	7	19	33	46	60	74	87	101	114	156
Max. Inter-mittent	[14]	[43]	[154]	[277]	[396]	[515]	[640]	[760]	[880]	[1002]	[1374]
	53,0	5	17	31	45	58	72	86	99	113	155
Max. Inter-mittent	[15]	[36]	[145]	[268]	[387]	[506]	[632]	[750]	[873]	[996]	[1373]
	56,8	4	16	30	44	57	71	85	99	113	155
Max. Inter-mittent	[20]	[14]	[121]	[233]	[351]	[482]	[609]	[725]	[856]	[981]	
	75,7	2	14	26	40	54	69	82	97	111	

Performance data is typical at 120 SUS. Actual data may vary slightly from unit to unit in production

Performance Data H Series

Motors run with high efficiency in all areas designated with a number for torque and speed, however for best motor life select a motor to run with a torque and speed range shown in the light blue area.

97 cm ³ /r [5.9 in ³ /r] Δ Pressure Bar [PSI] Continuous												Max. Continuous	Max. Intermittent									
	[200]	[400]	[600]	[800]	[1000]	[1200]	[1400]	[1600]	[1800]	[2400]												
	14	28	41	55	69	83	97	110	124	165												
[2]	[134]	[292]	[442]	[593]	[746]	[899]	[1054]	[1209]	[1365]	[1806]	[2]	[162]	[357]	[544]	[736]	[927]	[1116]	[1305]	[1498]	[1687]	[2231]	
7.6	15	33	50	67	84	102	119	137	154	204	7.6	18	40	61	83	105	126	149	169	191	252	
[4]	[131]	[281]	[436]	[596]	[750]	[903]	[1059]	[1212]	[1367]	[1828]	[4]	[160]	[348]	[539]	[736]	[930]	[1119]	[1316]	[1506]	[1698]	[2268]	
15.1	156	155	153	151	149	147	143	139	134	207	15.1	125	124	123	121	120	119	116	114	110	90	
[6]	[126]	[269]	[425]	[588]	[747]	[900]	[1054]	[1206]	[1368]	[1823]	[6]	[155]	[338]	[530]	[729]	[923]	[1116]	[1310]	[1500]	[1699]	[2271]	
22.7	14	30	48	66	84	102	119	136	155	206	22.7	18	38	60	82	104	126	148	169	192	257	
[8]	[110]	[246]	[408]	[566]	[718]	[873]	[1023]	[1177]	[1339]	[1829]	[8]	[139]	[319]	[515]	[710]	[901]	[1094]	[1283]	[1476]	[1673]	[2278]	
30.3	12	28	46	64	81	99	116	133	151	207	30.3	16	36	58	80	102	124	145	167	189	257	
[10]	[96]	[231]	[392]	[539]	[699]	[859]	[1005]	[1156]	[1318]	[1821]	[10]	[121]	[303]	[497]	[686]	[883]	[1081]	[1267]	[1460]	[1655]	[2268]	
37.9	11	26	44	61	79	97	114	131	149	206	37.9	14	34	56	78	100	122	143	165	187	256	
[12]	[77]	[218]	[378]	[522]	[681]	[844]	[990]	[1142]	[1301]	[1792]	[12]	[102]	[288]	[480]	[664]	[862]	[1060]	[1246]	[1440]	[1640]	[2232]	
45.4	9	25	43	59	77	95	112	129	147	202	45.4	12	33	54	75	97	120	141	163	185	252	
[14]	[60]	[197]	[358]	[513]	[662]	[828]	[973]	[1131]	[1293]	[1776]	[14]	[78]	[263]	[458]	[652]	[841]	[1041]	[1228]	[1420]	[1616]	[2213]	
53.0	7	22	40	58	75	94	110	128	146	201	53.0	9	30	52	74	95	118	139	160	183	250	
[15]	[52]	[189]	[346]	[495]	[651]	[819]	[963]	[1126]	[1286]	[1778]	[15]	[67]	[253]	[446]	[632]	[828]	[1030]	[1214]	[1411]	[1608]	[2205]	
56.8	6	21	39	56	74	93	109	127	145	201	56.8	8	29	50	71	94	116	137	159	182	249	
Max. Intermittent	[20]	[25]	[157]	[311]	[455]	[625]	[790]	[941]	[1110]	[1272]	Max. Intermittent	[20]	[20]	[202]	[384]	[581]	[778]	[971]	[1169]	[1356]	[1559]	[2250]
75.7	3	18	35	51	71	89	106	125	144		75.7	2	23	43	66	88	110	132	153	176	249	
	701	700	697	694	691	688	684	681	674			626	624	621	618	617	614	611	609	606		430

120 cm ³ /r [7.3 in ³ /r] Δ Pressure Bar [PSI] Continuous												Max. Continuous	Max. Intermittent									
	[200]	[400]	[600]	[800]	[1000]	[1200]	[1400]	[1600]	[1800]	[2400]												
	14	28	41	55	69	83	97	110	124	165												
[2]	[162]	[357]	[544]	[736]	[927]	[1116]	[1305]	[1498]	[1687]	[2231]	[2]	[162]	[357]	[544]	[736]	[927]	[1116]	[1305]	[1498]	[1687]	[2231]	
7.6	18	40	61	83	105	126	149	169	191	252	7.6	18	40	61	83	105	126	149	169	191	252	
[4]	[160]	[348]	[539]	[736]	[930]	[1119]	[1316]	[1506]	[1698]	[2268]	[4]	[160]	[348]	[539]	[736]	[930]	[1119]	[1316]	[1506]	[1698]	[2268]	
15.1	125	124	123	121	120	119	116	114	110	90	15.1	125	124	123	121	120	119	116	114	110	90	
[6]	[155]	[338]	[530]	[729]	[923]	[1116]	[1310]	[1500]	[1699]	[2271]	[6]	[155]	[338]	[530]	[729]	[923]	[1116]	[1310]	[1500]	[1699]	[2271]	
22.7	18	38	60	82	104	126	148	169	192	257	22.7	18	38	60	82	104	126	148	169	192	257	
[8]	[139]	[319]	[515]	[710]	[901]	[1094]	[1283]	[1476]	[1673]	[2278]	[8]	[139]	[319]	[515]	[710]	[901]	[1094]	[1283]	[1476]	[1673]	[2278]	
30.3	16	36	58	80	102	124	145	167	189	257	30.3	16	36	58	80	102	124	145	167	189	257	
[10]	[121]	[303]	[497]	[686]	[883]	[1081]	[1267]	[1460]	[1655]	[2268]	[10]	[121]	[303]	[497]	[686]	[883]	[1081]	[1267]	[1460]	[1655]	[2268]	
37.9	14	34	56	78	100	122	143	165	187	256	37.9	14	34	56	78	100	122	143	165	187	256	
[12]	[102]	[288]	[480]	[664]	[862]	[1060]	[1246]	[1440]	[1640]	[2232]	[12]	[102]	[288]	[480]	[664]	[862]	[1060]	[1246]	[1440]	[1640]	[2232]	
45.4	12	33	54	75	97	120	141	163	185	252	45.4	12	33	54	75	97	120	141	163	185	252	
[14]	[78]	[263]	[458]	[652]	[841]	[1041]	[1228]	[1420]	[1616]	[2213]	[14]	[78]	[263]	[458]	[652]	[841]	[1041]	[1228]	[1420]	[1616]	[2213]	
53.0	9	30	52	74	95	118	139	160	183	250	53.0	9	30	52	74	95	118	139	160	183	250	
[15]	[67]	[253]	[446]	[632]	[828]	[1030]	[1214]	[1411]	[1608]	[2205]	[15]	[67]	[253]	[446]	[632]	[828]	[1030]	[1214]	[1411]	[1608]	[2205]	
56.8	8	29	50	71	94	116	137	159	182	249	56.8	8	29	50	71	94	116	137	159	182	249	
Max. Intermittent	[20]	[20]	[202]	[384]	[581]	[778]	[971]	[1169]	[1356]	[1559]	Max. Intermittent	[20]	[20]	[202]	[384]	[581]	[778]	[971]	[1169]	[1356]	[1559]	[2250]
75.7	2	23	43	66	88	110	132	153	176	249	75.7	2	23	43	66	88	110	132	153	176	249	
	626	624	621	618	617	614	611	609	606			626	624	621	618	617	614	611	609	606		430

146 cm ³ /r [8.9 in ³ /r] Δ Pressure Bar [PSI] Continuous												Max. Continuous	Max. Intermittent									
	[200]	[400]	[600]	[800]	[1000]	[1200]	[1400]	[1600]	[1700]	[2300]												
	14	28	41	55	69	83	97	110	117	159												
[2]	[198]	[435]	[664]	[897]	[1130]	[1361]	[1591]	[1827]	[1942]	[2611]	[2]	[209]	[465]	[715]	[973]	[1228]	[1478]	[1724]	[1981]	[2046]	[2764]	
7.6	22	49	75	101	128	154	180	206	219	295	7.6	24	53	81	110	139	167	195	224	231	312	
[4]	[196]	[424]	[657]	[898]	[1133]	[1365]	[1604]	[1836]	[1954]	[2648]	[4]	[210]	[460]	[710]	[971]	[1229]	[1480]	[1745]	[1996]	[2059]	[2813]	
15.1	103	102	101	99	99	97	95	93	92	78	15.1	94	94	93	91	91	90	89	87	87	76	
[6]	[189]	[412]	[646]	[889]	[1125]	[1361]	[1598]	[1829]	[1951]	[2653]	[6]	[205]	[454]	[704]	[965]	[1216]	[1477]	[1738]	[1991]	[2055]	[2824]	
22.7	21	47	73	100	127	154	181	207	220	300	22.7	23	51	80	109	137	167	196	225	232	319	
[8]	[169]	[389]	[628]	[866]	[1098]	[1333]	[1564]	[1799]	[1919]	[2649]	[8]	[186]	[440]	[693]	[951]	[1205]	[1461]	[1716]	[1973]	[2038]	[2808]	
30.3	19	44	71	98	124	151	177	203	217	299	30.3	21	50	78	107	136	165	194	223	230	317	
[10]	[148]	[369]	[605]	[836]	[1076]	[1318]	[1544]	[1780]	[1899]	[2789]	[10]	[164]	[422]	[671]	[930]	[1189]	[1451]	[1702]	[1965]	[2032]	[2789]	
37.9	17	42	68	94	122	149	174	201	215	315	37.9	19	48	76	105	134	164	192	219	230	315	
[12]	[125]	[351]	[586]	[810]	[1051]	[1293]	[1519]	[1756]	[1878]	[2606]	[12]	[144]	[404]	[652]	[900]	[1163]	[1421]	[1674]	[1937]	[2004]	[2770]	
45.4	14	40	66	92	119	146	172	198	212	294	45.4	16	46	74	102	131	161	189	219	226	313	
[14]	[95]	[321]	[558]	[795]	[1026]	[1290]	[1497]	[1731]	[1851]	[2580]	[14]	[109]	[374]	[623]	[883]	[1140]	[1396]	[1653]	[1900]	[1963]	[2727]	
53.0	11	36	63	90	116	146	169	196	209	292	53.0	12	42	70	100	129	158	187	215	222	308	
[15]	[82]	[308]	[544]	[771]	[1010]	[1256]	[1480]	[1720]	[1840]	[2569]	[15]	[92]	[359]	[612]	[861]	[1123]	[1381]	[1633]	[1886]	[1950]	[2712]	
56.8	9	35	61	87	114	142	167	194	208	290	56.8	10	41	69	97	127	156	185	213	220	306	
Max. Intermittent	[20]	[24]	[246]	[468]	[708]	[948]	[1184]	[1425]	[1653]	[1780]	Max. Intermittent	[20]	[26]	[268]	[510]	[772]	[1034]	[1290]	[1553]	[1802]	[1865]	[2712]
75.7	3	28	53	80	107	134	161	187	201	298	75.7	3	30	58	87	117	146	175	204	211	298	
	513	512	509	507	506	504	501	499	498			471	470	467	465	464	462	460	458	458		330

[359]
41 } Torque [lb-in]
352 } Nm
Speed RPM

Performance data is typical at 120 SUS. Actual data may vary slightly from unit to unit in production

Performance Data H Series

Motors run with high efficiency in all areas designated with a number for torque and speed, however for best motor life select a motor to run with a torque and speed range shown in the light blue area.


185 cm ³ /r [11.3 in ³ /r] Δ Pressure Bar [PSI] Continuous												Max. Continuous	Max. Inter-mittent	231 cm ³ /r [14.1 in ³ /r] Δ Pressure Bar [PSI] Continuous												Max. Continuous	Max. Inter-mittent
[200]	[400]	[600]	[800]	[1000]	[1200]	[1400]	[1600]	[2150]	[200]	[400]	[600]	[800]	[1000]	[1200]	[1400]	[1450]	[2000]	[200]	[400]	[600]	[800]	[1000]	[1200]	[1400]	[1450]	[2000]	
14	28	41	55	69	83	97	110	148	14	28	41	55	69	83	97	100	138										
[2]	[257]	[554]	[847]	[1150]	[1447]	[1739]	[2035]	[2320]	[3103]	[2]	[338]	[707]	[1074]	[1456]	[1827]	[2192]	[2572]	[2657]									
7.6	29	63	96	130	163	196	230	262	351	7.6	38	80	121	165	206	248	291	300									
	40	40	39	38	37	36	33	29	12		32	32	31	30	30	28	26	25									
[4]	[254]	[546]	[845]	[1145]	[1448]	[1744]	[2049]	[2343]	[3147]	[4]	[328]	[695]	[1076]	[1447]	[1827]	[2201]	[2577]	[2669]	[3671]								
15.1	29	62	95	129	164	197	232	265	356	15.1	37	79	122	163	206	249	291	302	415								
	81	81	80	79	78	77	76	74	63		65	65	64	63	62	62	60	60	50								
[6]	[246]	[540]	[834]	[1137]	[1434]	[1736]	[2036]	[2337]	[3151]	[6]	[317]	[687]	[1057]	[1434]	[1811]	[2186]	[2555]	[2650]	[3668]								
22.7	28	61	94	128	162	196	230	264	356	22.7	36	78	119	162	205	247	289	299	414								
	121	121	120	120	119	117	115	112	100		97	97	97	96	95	94	92	91	80								
[8]	[224]	[520]	[820]	[1117]	[1414]	[1716]	[2014]	[2315]	[3133]	[8]	[289]	[659]	[1038]	[1406]	[1777]	[2160]	[2531]	[2625]	[3644]								
30.3	25	59	93	126	160	194	228	262	354	30.3	33	74	117	159	201	244	286	297	412								
	162	162	161	160	159	157	155	152	140		130	130	130	129	128	127	126	124	112								
[10]	[202]	[499]	[793]	[1095]	[1394]	[1699]	[1997]	[2299]	[3112]	[10]	[265]	[631]	[1004]	[1381]	[1751]	[2131]	[2510]	[2602]	[3608]								
37.9	23	56	90	124	158	192	226	260	352	37.9	30	71	113	156	198	241	284	294	408								
	202	202	201	200	200	198	196	193	181		162	162	162	162	160	158	156	156	145								
[12]	[176]	[475]	[767]	[1063]	[1368]	[1664]	[1969]	[2268]	[3088]	[12]	[230]	[599]	[968]	[1345]	[1722]	[2088]	[2480]	[2571]	[3571]								
45.4	20	54	87	120	155	188	222	256	349	45.4	26	68	109	152	195	236	280	290	403								
	243	242	242	241	240	238	236	234	222		195	195	194	194	193	192	189	189	178								
[14]	[140]	[443]	[735]	[1035]	[1340]	[1637]	[1936]	[2227]	[3051]	[14]	[191]	[563]	[927]	[1299]	[1686]	[2058]	[2428]	[2519]	[3532]								
53.0	16	50	83	117	151	185	219	252	345	53.0	22	64	105	147	190	233	274	285	399								
	283	283	282	282	280	279	277	274	262		227	227	227	226	226	224	222	221	212								
[15]	[120]	[425]	[719]	[1014]	[1320]	[1618]	[1914]	[2205]	[3023]	[15]	[167]	[538]	[904]	[1279]	[1661]	[2030]	[2404]	[2493]	[3488]								
56.8	14	48	81	115	149	183	217	249	342	56.8	19	61	102	145	188	229	272	282	394								
	304	303	302	301	300	299	297	294	283		243	243	243	242	242	240	238	238	229								
Max. Continuous	[20]	[27]	[321]	[612]	[911]	[1211]	[1504]	[1795]		Max. Continuous	[20]	[29]	[411]	[785]	[1152]	[1520]	[1877]	[2222]	[2318]								
Max. Inter-mittent	75.7	3	36	69	103	137	170	203		Max. Inter-mittent	75.7	3	46	89	130	172	212	251	262								
		405	404	402	401	400	398	397				324	324	323	322	322	320	319	318								

293 cm ³ /r [17.9 in ³ /r] Δ Pressure Bar [PSI] Continuous										Max. Continuous	Max. Inter-mittent	370 cm ³ /r [22.6 in ³ /r] Δ Pressure Bar [PSI] Continuous										Max. Continuous	Max. Inter-mittent					
[200]	[400]	[600]	[800]	[1000]	[1200]	[1350]	[1800]	[200]	[400]	[600]	[800]	[1000]	[1200]	[1250]	[1500]	[200]	[400]	[600]	[800]	[200]	[400]	[600]	[800]	[200]	[400]	[600]	[800]	
14	28	41	55	69	83	93	124	14	28	41	55	69	83	86	103	14	28	41	55	14	28	41	55	14	28	41	55	
[2]	[427]	[893]	[1361]	[1829]	[2293]	[2672]	[2977]	[2]	[537]	[1121]	[1715]	[2285]	[2862]	[2]	[1080]	[2250]	[3440]	[4570]	[4]	[1070]	[2250]	[3440]	[4600]	[4]	[1070]	[2250]	[3440]	
7.6	48	101	154	207	259	302	336	7.6	61	127	194	258	323	7.6	122	254	389	516	15.1	121	254	389	520	15.1	121	254	389	
	26	25	25	24	22	16	13		20	20	20	19	16		10	10	10	9		20	20	19	18		20	20	19	
[4]	[419]	[886]	[1362]	[1833]	[2305]	[2771]	[3110]	[4]	[532]	[1123]	[1715]	[2308]	[2893]	[4]	[1070]	[2250]	[3440]	[4600]	[4]	[1070]	[2250]	[3440]	[4600]	[4]	[1070]	[2250]	[3440]	
15.1	47	100	154	207	260	312	351	15.1	60	127	194	261	327	15.1	121	254	389	520		121	254	389	520		121	254	389	
	51	51	51	50	49	47	44		40	40	40	39	38		20	20	19	18		20	20	19	18		20	20	19	
[6]	[402]	[872]	[1342]	[1819]	[2291]	[2757]	[3098]	[6]	[508]	[1100]	[1693]	[2294]	[2884]	[6]	[1020]	[2200]	[3390]	[4590]	[6]	[1020]	[2200]	[3390]	[4590]	[6]	[1020]	[2200]	[3390]	
22.7	45	99	152	206	259	312	350	22.7	57	124	191	259	326	22.7	115	249	383	519		115	249	383	519		115	249	383	
	77	77	76	76	74	71	68		61	61	61	60	58		30	30	29	27		30	30	29	27		30	30	29	
[8]	[367]	[838]	[1316]	[1785]	[2252]	[2723]	[3070]	[8]	[463]	[1060]	[1661]	[2255]	[2840]	[8]	[945]	[2135]	[3330]	[4515]	[8]	[945]	[2135]	[3330]	[4515]	[8]	[945]	[2135]	[3330]	
30.3	41	95	149	202	254	306	347	30.3	52	120	188	255	321	30.3	107	241	376	510		107	241	376	510		107	241	376	
	102	102	102	101	100	98	95		81	81	81	80	79		40	40	39	37		40	40	39	37		40	40	39	
[10]	[332]	[803]	[1276]	[1749]	[2215]	[2684]	[3034]	[10]	[414]	[1017]	[1613]	[2203]	[2788]	[10]	[840]	[2050]	[3250]	[4430]	[10]	[840]	[2050]	[3250]	[4430]	[10]	[840]	[2050]	[3250]	
37.9	38	91	144	198	250	303	343	37.9	47	115	182	249	315	37.9	95	232	367	501		95	232	367	501		95	232	367	
	128	128	128	127	126	123	120		101	101	101	101	99		50	50	48	46		50	50	48	46		50	50	48	
[12]	[289]	[760]	[1230]	[1706]	[2177]	[2634]	[2989]	[12]	[363]	[960]	[1553]	[2152]	[2737]	[12]	[740]	[1945]	[3130]	[4320]	[12]	[740]	[1945]	[3130]	[4320]	[12]	[740]	[1945]	[3130]	
45.4	33	86	139	193	246	298	338	45.4	41	108	175	243	309	45.4	84	220	354	488		84	220	354	488		84	220	354	
	153	153	153	153	151	149	146		121	121	121	121	119		60	59	58	55		60	59	58	55		60	59	58	
[14]	[241]	[712]	[1176]	[1650]	[2126]	[2592]	[2935]	[14]	[303]	[897]	[1484]	[2086]	[2667]	[14]	[630]	[1820]	[3005]	[4195]	[14]	[630]	[1820]	[3005]	[4195]	[14]	[630]	[1820]	[3005]	
53.0	27	80	133	186	240	293	332	53.0	34	101	168	236	301	53.0	71	206	340	474		71	206	340	474		71	206	340	
	179	179	179	177	175	172	161		142	142	142	142	140		69	68	68	66		69	68	68	66		69	68	68	
[15]	[211]	[683]	[1149]	[1623]	[2096]	[2558]	[2905]	[15]	[266]	[862]	[1452]	[2050]	[2630]	[15]	[540]	[1735]	[2905]	[4130]	[15]	[540]	[1735]	[2905]	[4130]	[15]	[540]	[1735]	[2905]	
56.8	24	77	130	183	237	289	328	56.8	30	97	164	232	297	56.8	61	196	328	467		61	196	328	467		61	196	328	
	192	192	192	191	190	188	185		152	152	152	152	150		74	74	73	72		74	74	73	72		74	74	73	
Max. Continuous	[20]	[43]	[527]	[1001]	[1463]	[1919]	[2375]	[2720]	Max. Continuous	[20]	[61]	[671]	[1269]	[1847]	Max. Continuous	[20]	[143]	[1350]	[2565]	Max. Continuous	[20]	[143]	[1350]	[2565]	Max. Continuous	[20]	[143]	[1350]
Max. Inter-mittent	75.7	5	60	113	165	217	268	307	Max. Inter-mittent	75.7	7	76	143	209	Max. Inter-mittent	75.7	16	153	290	Max. Inter-mittent	75.7	16	153	290	Max. Inter-mittent	75		

Dimensions H Series


2 Bolt Flange

82,55/82,42
[3.250/3.245]
Pilot Dia.

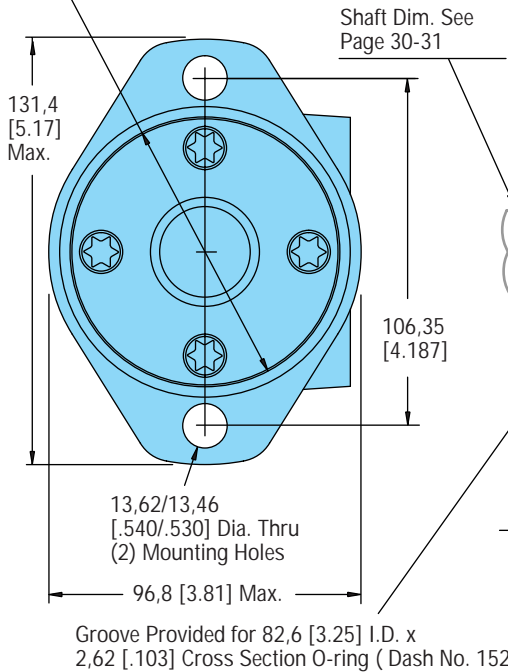

Standard Rotation
Viewed from Shaft End
Port A Pressurized — CW
Port B Pressurized — CCW

4 Bolt Flange

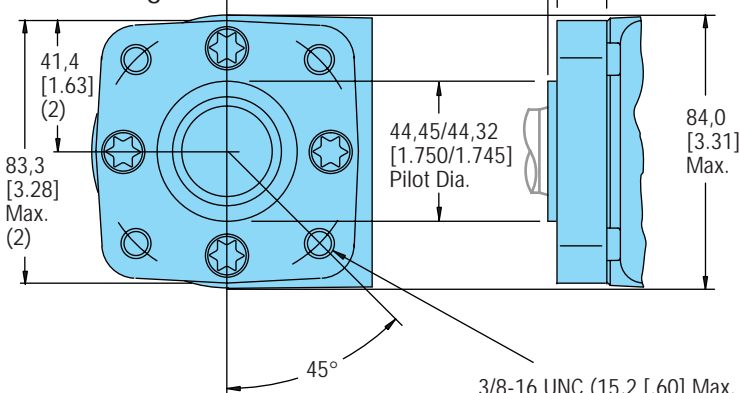


3/8-16 UNC (15,2 [.60] Max. Bolt Thread Engagement) Mounting Holes (4) Equally Spaced on 82,6 [3.25] Dia. Bolt Circle or M10 x 1,5 (15,2 [.60] Max. Bolt Thread Engagement) Mounting Holes (4) Equally Spaced on 82,6 [3.25] Dia. Bolt Circle

End Ported Motor End Cap


See Page 33

End Ported End Cap
with Case Drain Port
See Page 34

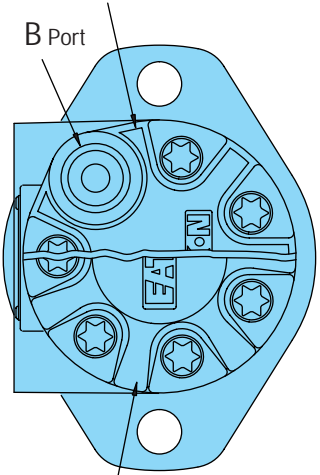

Standard Motor End Cap

End Cap with Case Drain Port
See Page 34

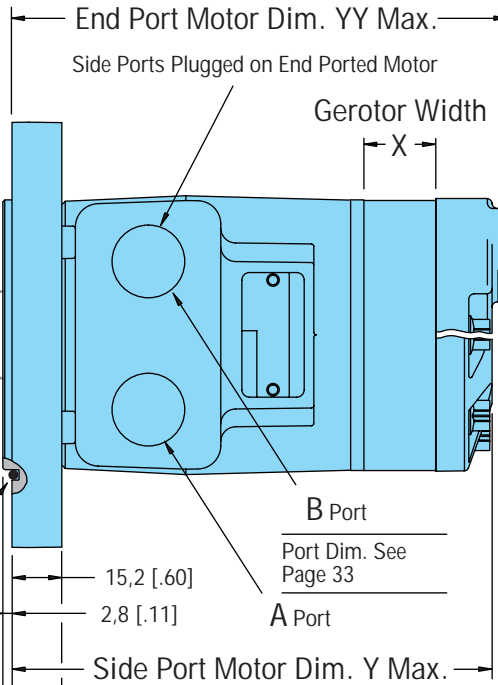

Displ. cm ³ /r [in ³ /r]	X	Y Max.	YY Max.
	Width mm [in.]	Length mm [in.]	Length mm [in.]
36 [2.2]	6,4 [.25]	132,1 [5.20]	138,5 [5.45]
46 [2.8]	6,4 [.25]	132,1 [5.20]	138,5 [5.45]
59 [3.6]	10,2 [.40]	135,9 [5.35]	142,3 [5.60]
74 [4.5]	10,2 [.40]	135,9 [5.35]	142,3 [5.60]
97 [5.9]	13,2 [.52]	139,0 [5.47]	145,3 [5.72]
120 [7.3]	16,5 [.65]	142,3 [5.60]	148,6 [5.85]
146 [8.9]	20,1 [.79]	145,8 [5.74]	152,2 [5.99]
159 [9.7]	21,9 [.86]	147,6 [5.81]	154,0 [6.06]
185 [11.3]	25,4 [1.00]	151,2 [5.95]	157,5 [6.20]
231 [14.1]	31,8 [1.25]	157,5 [6.20]	
293 [17.9]	40,4 [1.59]	166,2 [6.54]	
370 [22.6]	50,8 [2.00]	176,6 [6.95]	
739 [45.1]	101,6 [4.00]	227,4 [8.95]	

Note: Mounting Surface Flatness Requirement is ,13 mm [.005 inch] Max.

Product Numbers

H Series 101-xxxx

Product Numbers—H Series

Add three digit prefix —101—to four digit number from chart for complete product number—Example 101-1868.
Orders will not be accepted without three digit prefix.

Mounting	Shaft	Ports	Displ. cm ³ /r [in ³ /r] Product Number 101-xxxx												
			36 [2.2]	46 [2.8]	59 [3.6]	74 [4.5]	97 [5.9]	120 [7.3]	146 [8.9]	159 [9.7]	185 [11.3]	231 [14.1]	293 [17.9]	370 [22.6]	740 [45.0]
2 Bolt Flange	1 in. Straight w/Woodruff Key	7/8-14 O-ring	101-1700	-1033	-1701	-1034	-1035	-1702	-1703	-1036	-1037	-1038	-1039	-1040	—
		1/2 NPTF	101-1704	-1025	-1705	-1026	-1027	-1706	-1707	-1028	-1029	-1030	-1031	-1032	—
		Manifold*	101-1708	-1041	-1709	-1042	-1043	-1710	-1711	-1044	-1045	-1046	-1047	-1048	—
	1 in. SAE 6B Splined	7/8-14 O-ring	101-1721	-1081	-1722	-1082	-1083	-1723	-1724	-1084	-1085	-1086	-1087	-1088	—
		1/2 NPTF	101-1725	-1073	-1726	-1074	-1075	-1727	-1728	-1076	-1077	-1078	-1079	-1080	—
		Manifold*	101-1729	-1089	-1730	-1090	-1091	-1731	-1732	-1092	-1093	-1094	-1095	-1096	—
	1 in. Straight w/.31 Dia. Crosshole	7/8-14 O-ring	101-1796	-1797	-1798	-1799	-1800	-1801	-1802	-1803	—	—	—	—	—
		1/2 NPTF	101-1804	-1805	-1806	-1807	-1808	-1870	-1809	-1810	—	—	—	—	—
		Manifold*	101-1811	-1812	-1813	-1814	-1815	-1816	-1817	-1818	—	—	—	—	—
	1 in. Straight w/.40 Dia. Crosshole	7/8-14 O-ring	101-1819	-1323	-1820	-1324	-1325	-1821	-1822	-1326	—	—	—	—	—
		1/2 NPTF	101-1823	-1319	-1824	-1320	-1825	-1826	-1827	-1828	—	—	—	—	—
		Manifold*	101-1829	-1463	-1830	-1831	-1832	-1833	-1834	-1871	—	—	—	—	—
4 Bolt Flange	1 in. Straight w/Woodruff Key	7/8-14 O-ring	101-1749	-1009	-1750	-1010	-1011	-1751	-1752	-1012	-1013	-1014	-1015	-1016	—
		1/2 NPTF	101-1753	-1001	-1754	-1002	-1003	-1755	-1756	-1004	-1005	-1006	-1007	-1008	—
		Manifold*	101-1757	-1017	-1758	-1018	-1019	-1759	-1760	-1020	-1021	-1022	-1023	-1024	—
	1 in. SAE 6B Splined	7/8-14 O-ring	101-1761	-1057	-1762	-1058	-1059	-1872	-1763	-1060	-1061	-1062	-1063	-1064	—
		1/2 NPTF	101-1764	-1049	-1765	-1050	-1051	-1766	-1767	-1052	-1053	-1054	-1055	-1056	—
		Manifold*	101-1768	-1065	-1769	-1066	-1067	-1770	-1771	-1068	-1069	-1070	-1071	-1072	—
	1 in. Straight w/.31 Dia. Crosshole	7/8-14 O-ring	101-1835	-1836	-1837	-1838	-1839	-1840	-1841	-1842	—	—	—	—	—
		1/2 NPTF	101-1843	-1497	-1844	-1449	-1352	-1845	-1846	-1847	—	—	—	—	—
		Manifold*	101-1848	-1466	-1849	-1459	-1850	-1851	-1852	-1853	—	—	—	—	—
	1 in. Straight w/.40 Dia. Crosshole	7/8-14 O-ring	101-1854	-1311	-1855	-1856	-1857	-1858	-1859	-1860	—	—	—	—	—
		1/2 NPTF	101-1861	-1313	-1862	-1312	-1314	-1863	-1864	-1315	—	—	—	—	—
		Manifold*	101-1865	-1305	-1866	-1306	-1307	-1867	-1868	-1869	—	—	—	—	—

101-1868

Product Numbers—H Series Motors with Corrosion Protection


Mounting	Shaft	Ports	Displ. cm ³ /r [in ³ /r] Product Number 101-xxxx												
			36 [2.2]	46 [2.8]	59 [3.6]	74 [4.5]	97 [5.9]	120 [7.3]	146 [8.9]	159 [9.7]	185 [11.3]	231 [14.1]	293 [17.9]	370 [22.6]	740 [45.0]
4 Bolt Flange	1 in. Straight w/Woodruff Key	1/2 NPTF	101-2032	-2014	-2093	-2027	-2013	-2094	-2095	-2015	-2028	-2029	-2030	-2031	—
		Manifold*		-2067							-2068	-2069			

*Manifold product numbers shown are for motors with four 5/16-18 port face mounting threads. Manifold, manifold mounting o-rings and bolts are NOT included (for M8 x 1,5 port face mounting threads see note below).

For H Series Motors with a configuration *Not Shown* in the charts above: Use the model code number system on page 37 to specify the product in detail.

For H Series Motors with Low Speed Valving — See Page 28.

Specifications S Series

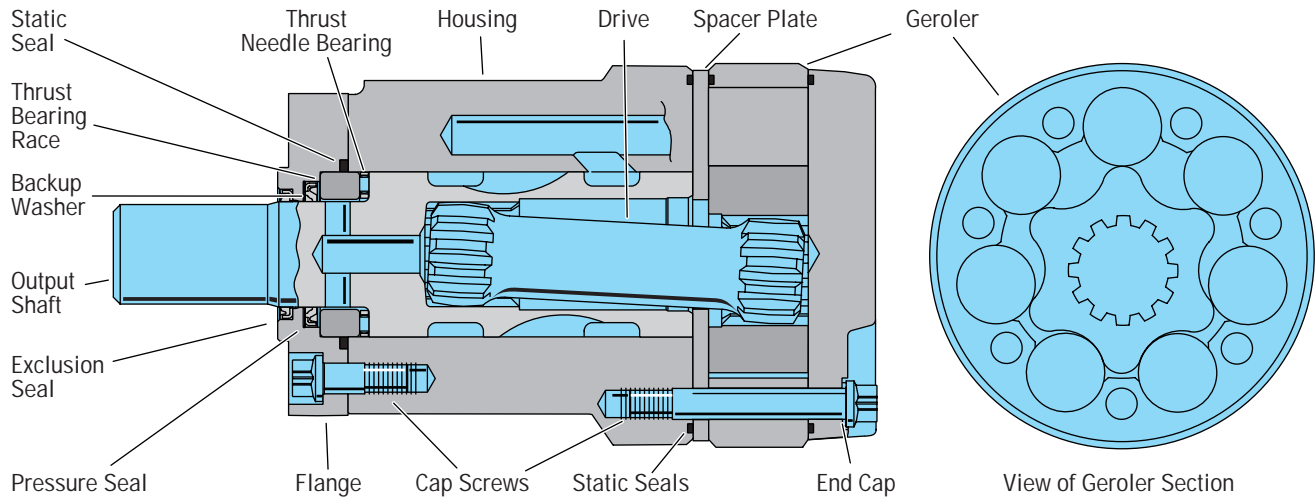

Specification Data—S Series

Displ. cm ³ /r [cu. in ³ /r]		59 [3.6]	74 [4.5]	97 [5.9]	120 [7.3]	146 [8.9]	159 [9.7]	185 [11.3]	231 [14.1]	293 [17.9]	370 [22.6]
Max. Speed (RPM) @ Continuous Flow		962	762	585	470	385	353	303	243	192	153
Flow LPM [GPM]	Continuous	57 [15]	57 [15]	57 [15]	57 [15]	57 [15]	57 [15]	57 [15]	57 [15]	57 [15]	57 [15]
	Intermittent	68 [18]	76 [20]	76 [20]	76 [20]	76 [20]	76 [20]	76 [20]	76 [20]	76 [20]	76 [20]
Torque Nm [lb-in]	Continuous	107 [943]	139 [1228]	181 [1591]	227 [2010]	263 [2332]	291 [2567]	324 [2870]	369 [3265]	411 [3641]	452 [4004]
	Intermittent **	133 [1174]	173 [1529]	225 [1991]	281 [2490]	323 [2861]	347 [3072]	390 [3450]	438 [3877]	485 [4295]	514 [4548]
Min. Starting Torque Nm[lb-in]	@ Cont. Pressure	90 [800]	113 [1000]	148 [1310]	184 [1630]	212 [1880]	232 [2050]	263 [2330]	302 [2670]	338 [2990]	369 [3270]
	@ Int. Pressure	116 [1030]	146 [1290]	190 [1680]	236 [2090]	271 [2400]	289 [2560]	329 [2910]	374 [3310]	417 [3690]	438 [3880]
Pressure Δ Bar [Δ PSI]	Continuous*	138 [2000]	138 [2000]	138 [2000]	138 [2000]	131 [1900]	131 [1900]	128 [1850]	117 [1700]	103 [1500]	90 [1300]
	Intermittent**	172 [2500]	172 [2500]	172 [2500]	172 [2500]	162 [2350]	159 [2300]	155 [2250]	141 [2050]	124 [1800]	103 [1500]

Maximum Case Pressure - without Case Drain — 103 Bar [1500 PSI] — See Page 34-35

* Maximum intermittent pressure at motor inlet port of 172 Bar [2500 PSI] without regard to Δ Bar [Δ PSI] and/or back pressure ratings or combination thereof.

** A simultaneous maximum torque and maximum speed NOT recommended.

6B Splined or Tapered shafts are recommended whenever operating above 282 Nm [2500 lb-in] of torque, especially for those applications subject to frequent reversals (see page 30).

Δ Bar [Δ PSI] — True pressure difference between inlet port and outlet port.

Continuous Rating — Motor may be run continuously at these ratings.

Intermittent Operation — 10% of every minute.

Recommended Fluids — Premium quality, anti-wear type hydraulic oil with a viscosity of not less than 70 SUS at operating temperature.

Recommended Maximum System Operating Temp — Is 82° C [180° F]

Recommended Filtration — per ISO Cleanliness Code, level 18/13

To assure optimum motor life, run motor for approximately one hour at 30% of rated pressure before application to full load. Be sure motor is filled with fluid prior to any load applications.

Performance Data S Series

Motors run with high efficiency in all areas designated with a number for torque and speed, however for best motor life select a motor to run with a torque and speed range shown in the light blue area.

59 cm³/r [3.6 in³/r]
Δ Pressure Bar [PSI]
Continuous

	[200]	[400]	[600]	[800]	[1000]	[1200]	[1400]	[1600]	[1800]	[2000]	[2500]
	14	28	41	55	69	83	97	110	124	138	172
[2]	[89]	[191]	[289]	[382]	[477]	[571]	[665]	[755]	[834]		
7,6	10	22	33	43	54	65	75	85	94		
[4]	[91]	[187]	[283]	[372]	[474]	[572]	[666]	[764]	[849]	[942]	
15,1	10	21	32	42	54	65	75	86	96	106	
[6]	[84]	[176]	[276]	[371]	[469]	[563]	[658]	[753]	[851]	[943]	[1174]
22,7	9	20	31	42	53	64	74	85	96	107	133
[8]	[75]	[168]	[269]	[364]	[456]	[556]	[657]	[752]	[846]	[939]	[1174]
30,3	8	19	30	41	52	63	74	85	96	106	133
[10]	[66]	[160]	[258]	[354]	[446]	[544]	[642]	[738]	[834]	[928]	[1167]
37,9	7	18	29	40	50	61	73	83	94	105	132
[12]	[54]	[147]	[247]	[345]	[441]	[537]	[633]	[728]	[823]	[920]	[1158]
45,4	6	17	28	39	50	61	72	82	93	104	131
[14]	[39]	[133]	[235]	[327]	[428]	[524]	[618]	[714]	[811]	[907]	[1145]
53,0	4	15	27	37	48	59	70	81	92	102	129
[15]	[29]	[125]	[228]	[321]	[422]	[519]	[613]	[708]	[805]	[901]	[1138]
56,8	3	14	26	36	48	59	69	80	91	102	129
[18]	[13]	[107]	[206]	[300]	[398]	[502]	[593]	[689]	[783]	[879]	
68,1	1	12	23	34	45	57	67	78	88	99	

74 cm³/r [4.5 in³/r]
Δ Pressure Bar [PSI]
Continuous

	[200]	[400]	[600]	[800]	[1000]	[1200]	[1400]	[1600]	[1800]	[2000]	[2500]
	14	28	41	55	69	83	97	110	124	138	172
[2]	[116]	[248]	[376]	[498]	[620]	[743]	[865]	[983]	[1086]		
7,6	13	28	42	56	70	84	98	111	123		
[4]	[119]	[244]	[369]	[484]	[618]	[744]	[867]	[995]	[1105]	[1227]	
15,1	13	28	42	55	70	84	98	112	125	139	
[6]	[109]	[229]	[359]	[483]	[611]	[733]	[857]	[981]	[1108]	[1228]	[1529]
22,7	12	26	41	55	69	83	97	111	125	139	173
[8]	[97]	[219]	[351]	[474]	[594]	[725]	[856]	[979]	[1104]	[1223]	[1529]
30,3	11	25	40	54	67	82	97	111	124	138	173
[10]	[86]	[209]	[335]	[461]	[580]	[709]	[836]	[961]	[1086]	[1209]	[1520]
37,9	10	24	38	52	66	80	94	109	123	137	172
[12]	[70]	[191]	[322]	[449]	[574]	[699]	[824]	[948]	[1072]	[1198]	[1508]
45,4	8	22	36	51	65	79	93	107	121	135	170
[14]	[51]	[173]	[307]	[425]	[558]	[682]	[805]	[930]	[1056]	[1181]	[1491]
53,0	6	20	35	48	63	77	91	105	119	133	168
[15]	[37]	[163]	[296]	[418]	[550]	[676]	[799]	[921]	[1048]	[1173]	[1482]
56,8	4	18	33	47	62	76	90	104	118	133	167
[20]	[18]	[89]	[242]	[369]	[528]	[645]	[762]	[884]	[1001]	[1117]	
75,7	2	10	27	42	60	73	86	100	113	126	

97 cm³/r [5.9 in³/r]
Δ Pressure Bar [PSI]
Continuous

	[200]	[400]	[600]	[800]	[1000]	[1200]	[1400]	[1600]	[1800]	[2000]	[2500]
	14	28	41	55	69	83	97	110	124	138	172
[2]	[152]	[324]	[490]	[649]	[808]	[968]	[1127]	[1280]	[1414]		
7,6	17	37	55	73	91	109	127	145	160		
[4]	[155]	[318]	[480]	[630]	[804]	[969]	[1129]	[1296]	[1439]	[1598]	
15,1	18	36	54	71	91	109	128	146	163	181	
[6]	[142]	[298]	[467]	[629]	[796]	[955]	[1116]	[1278]	[1443]	[1599]	[1991]
22,7	16	34	53	71	90	108	126	144	163	181	225
[8]	[126]	[285]	[457]	[618]	[774]	[943]	[1115]	[1274]	[1434]	[1593]	[1991]
30,3	14	32	52	70	87	107	126	144	162	180	225
[10]	[112]	[272]	[437]	[600]	[756]	[923]	[1089]	[1251]	[1414]	[1574]	[1979]
37,9	13	31	49	68	85	104	123	141	160	178	224
[12]	[92]	[249]	[419]	[584]	[748]	[910]	[1073]	[1235]	[1396]	[1560]	[1964]
45,4	10	28	47	66	85	103	121	140	158	176	222
[14]	[66]	[225]	[399]	[554]	[726]	[888]	[1049]	[1210]	[1375]	[1538]	[1941]
53,0	7	25	45	63	82	100	119	137	155	174	219
[15]	[49]	[213]	[386]	[544]	[716]	[880]	[1040]	[1200]	[1364]	[1527]	[1930]
56,8	6	24	44	61	81	99	118	136	154	173	218
[20]	[24]	[115]	[315]	[481]	[688]	[839]	[993]	[1151]	[1303]	[1455]	
75,7	3	13	36	54	78	95	112	130	147	164	

120 cm³/r [7.3 in³/r]
Δ Pressure Bar [PSI]
Continuous

	[200]	[400]	[600]	[800]	[1000]	[1200]	[1400]	[1600]	[1800]	[2000]	[2500]
	14	28	41	55	69	83	97	110	124	138	172
[2]	[190]	[403]	[608]	[814]	[1017]	[1214]	[1411]	[1598]	[1770]	[1947]	
7,6	21	46	69	92	115	137	159	181	200	220	
[4]	[192]	[400]	[606]	[803]	[1014]	[1221]	[1422]	[1627]	[1815]	[2008]	
15,1	22	45	68	91	115	138	161	184	205	227	
[6]	[178]	[380]	[591]	[798]	[1006]	[1209]	[1413]	[1615]	[1815]	[2010]	[2485]
22,7	20	43	67	90	114	137	160	182	205	227	281
[8]	[161]	[366]	[579]	[782]	[982]	[1193]	[1403]	[1605]	[1804]	[2003]	[2490]
30,3	18	41	65	88	111	135	159	181	204	226	281
[10]	[144]	[351]	[556]	[760]	[963]	[1172]	[1381]	[1579]	[1786]	[1984]	[2487]
37,9	16	40	63	86	109	132	156	178	202	224	281
[12]	[124]	[323]	[527]	[739]	[950]	[1153]	[1359]	[1561]	[1761]	[1966]	[2466]
45,4	14	36	60	83	107	130	154	176	199	222	279
[14]	[93]	[296]	[507]	[709]	[920]	[1123]	[1328]	[1532]	[1738]	[1940]	[2446]
53,0	11	33	57	80	104	127	150	173	196	219	276
[15]	[72]	[281]	[491]	[696]	[907]	[1110]	[1316]	[1519]	[1722]	[1928]	[2426]
56,8	8	32	55	79	102	125	149	172	195	218	274
[20]	[179]	[409]	[617]	[851]	[1047]	[1249]	[1448]	[1644]	[1837]		
75,7	20	46	70	96	118	141	164	186	208		

[281]
32 } Torque [lb-in]
468 } Nm
Speed RPM

Performance data is typical at 120 SUS. Actual data may vary slightly from unit to unit in production

Performance Data S Series

Motors run with high efficiency in all areas designated with a number for torque and speed, however for best motor life select a motor to run with a torque and speed range shown in the light blue area.

146 cm³/r [8.9 in³/r]
Δ Pressure Bar [PSI]
Continuous

	[200]	[400]	[600]	[800]	[1000]	[1200]	[1400]	[1600]	[1800]	[1900]	Max. Continuous	Max. Inter-mittent
	14	28	41	55	69	83	97	110	124	131	[2350]	162
[2]	[231]	[491]	[741]	[993]	[1239]	[1480]	[1720]	[1949]	[2159]	[2267]		
7.6	26	55	84	112	140	167	194	220	244	256		
	51	50	49	48	46	42	39	34	25	24		
[4]	[234]	[488]	[739]	[979]	[1237]	[1489]	[1734]	[1984]	[2212]	[2331]		
15.1	26	55	83	111	140	168	196	224	250	263		
	103	102	100	99	97	95	91	87	82	79		
[6]	[217]	[464]	[721]	[972]	[1227]	[1474]	[1722]	[1969]	[2213]	[2332]	[2859]	
22.7	25	52	81	110	139	167	195	222	250	263	323	
	154	153	152	150	148	145	142	137	130	126	105	
[8]	[196]	[447]	[706]	[954]	[1197]	[1454]	[1711]	[1956]	[2199]	[2321]	[2861]	
30.3	22	51	80	108	133	164	193	221	248	262	323	
	205	204	203	201	200	197	193	188	182	177	156	
[10]	[176]	[428]	[678]	[926]	[1174]	[1429]	[1684]	[1925]	[2178]	[2298]	[2841]	
37.9	20	48	77	105	133	161	190	217	246	260	321	
	257	256	255	253	251	247	244	239	232	229	207	
[12]	[151]	[394]	[643]	[902]	[1159]	[1405]	[1657]	[1903]	[2147]	[2271]	[2828]	
45.4	17	45	73	102	131	159	187	215	243	257	320	
	308	307	305	304	302	298	294	290	284	279	258	
[14]	[113]	[361]	[618]	[864]	[1121]	[1369]	[1619]	[1868]	[2118]	[2241]	[2791]	
53.0	13	41	70	98	127	155	183	211	239	253	315	
	360	358	356	355	353	350	346	340	334	330	307	
[15]	[88]	[343]	[599]	[848]	[1106]	[1353]	[1605]	[1852]	[2099]	[2224]	[2771]	
Max. Continuous	10	39	68	96	125	153	181	209	237	251	313	
	385	384	382	380	378	375	371	365	359	355	332	
Max. Inter-mittent	[20]	[218]	[499]	[752]	[1037]	[1277]	[1523]	[1765]	[2004]	[2121]		
		25	56	85	117	144	172	199	226	240		
		512	510	507	504	501	498	492	485	480		

159 cm³/r [9.7 in³/r]
Δ Pressure Bar [PSI]
Continuous

	[200]	[400]	[600]	[800]	[1000]	[1200]	[1400]	[1600]	[1800]	[1900]	Max. Continuous	Max. Inter-mittent
	14	28	41	55	69	83	97	110	124	131	[2350]	159
[2]	[253]	[536]	[805]	[1090]	[1364]	[1623]	[1884]	[2129]	[2365]	[2477]		
7.6	29	61	91	123	154	183	213	241	267	280		
	47	46	45	44	42	39	35	31	26	23		
[4]	[254]	[537]	[816]	[1091]	[1365]	[1641]	[1910]	[2180]	[2440]	[2567]	[3042]	
15.1	29	61	92	123	154	185	216	246	276	291	343	
	94	93	92	91	89	87	84	81	77	76	65	
[6]	[238]	[517]	[797]	[1079]	[1356]	[1632]	[1906]	[2177]	[2434]	[2565]	[3059]	
22.7	27	58	90	121	153	184	215	245	275	289	345	
	141	140	139	138	136	134	130	126	119	116	100	
[8]	[217]	[502]	[784]	[1057]	[1328]	[1608]	[1884]	[2155]	[2421]	[2554]	[3072]	
30.3	24	56	88	119	150	181	212	242	272	288	347	
	188	187	186	185	183	181	178	174	168	164	147	
[10]	[198]	[484]	[754]	[1025]	[1307]	[1587]	[1868]	[2126]	[2406]	[2537]	[3055]	
37.9	22	54	85	115	147	179	211	240	271	286	345	
	236	235	233	232	230	227	224	221	215	212	194	
[12]	[177]	[446]	[707]	[998]	[1289]	[1556]	[1837]	[2103]	[2369]	[2505]	[3044]	
45.4	20	50	79	112	145	175	207	237	267	283	344	
	283	281	280	278	277	274	271	268	262	259	242	
[14]	[137]	[415]	[685]	[966]	[1242]	[1514]	[1794]	[2069]	[2341]	[2475]	[3005]	
53.0	15	46	77	109	140	171	202	233	264	279	339	
	330	328	326	326	324	322	318	314	309	305	289	
[15]	[110]	[395]	[667]	[947]	[1225]	[1493]	[1776]	[2052]	[2317]	[2455]	[2983]	
Max. Continuous	12	44	75	107	138	168	200	231	261	277	337	
	353	352	350	349	348	345	341	337	333	329	313	
Max. Inter-mittent	[20]	[284]	[565]	[844]	[1123]	[1394]	[1675]	[1942]	[2211]	[2342]		
		32	63	95	126	157	189	219	249	264		
		469	468	466	463	462	459	455	450	446		

185 cm³/r [11.3 in³/r]
Δ Pressure Bar [PSI]
Continuous

	[200]	[400]	[600]	[800]	[1000]	[1200]	[1400]	[1600]	[1800]	[1850]	Max. Continuous	Max. Inter-mittent
	14	28	41	55	69	83	97	110	124	128	[2250]	155
[2]	[296]	[623]	[942]	[1263]	[1577]	[1874]	[2172]	[2450]	[2499]	[2500]		
7.6	33	70	106	143	178	212	245	277	282	282		
	40	40	39	38	36	34	31	27	21	20		
[4]	[294]	[619]	[947]	[1265]	[1588]	[1896]	[2200]	[2503]	[2796]	[2868]	[3439]	
15.1	33	70	107	143	179	214	249	283	316	324	389	
	81	80	80	79	77	76	73	71	68	67	63	
[6]	[277]	[602]	[928]	[1255]	[1574]	[1889]	[2196]	[2505]	[2796]	[2870]	[3448]	
22.7	31	68	105	142	178	213	248	283	316	324	390	
	121	121	120	119	117	115	112	108	103	101	87	
[8]	[255]	[582]	[908]	[1229]	[1546]	[1864]	[2180]	[2487]	[2786]	[2861]	[3450]	
30.3	29	66	103	139	175	211	246	281	315	323	390	
	162	161	161	160	158	156	153	150	144	142	130	
[10]	[231]	[560]	[879]	[1195]	[1521]	[1838]	[2160]	[2460]	[2766]	[2841]	[3433]	
37.9	26	63	99	135	172	208	244	278	313	321	388	
	202	202	201	200	198	196	193	190	184	183	170	
[12]	[199]	[522]	[832]	[1163]	[1491]	[1803]	[2127]	[2434]	[2734]	[2810]	[3414]	
45.4	22	59	94	131	168	204	240	275	309	317	386	
	243	242	241	240	239	237	234	231	225	224	212	
[14]	[157]	[485]	[802]	[1124]	[1444]	[1763]	[2080]	[2392]	[2698]	[2774]	[3378]	
53.0	18	55	91	127	163	199	235	270	305	313	382	
	283	283	281	281	279	277	274	271	266	264	250	
[15]	[132]	[461]	[780]	[1103]	[1422]	[1739]	[2059]	[2372]	[2674]	[2751]	[3374]	
Max. Continuous	15	52	88	125	162	196	233	268	302	311	381	
	303	303	302	301	299	298	295	291	286	285	271	
Max. Inter-mittent	[20]	[335]	[662]	[987]	[1307]	[1623]	[1930]	[2227]	[2524]	[2597]		
		38	75	112	148	183	218	252	285	293		
		404	403	401	399	397	395	392	387	385		

231 cm³/r [14.1 in³/r]
Δ Pressure Bar [PSI]
Continuous


	[200]	[400]	[600]	[800]	[1000]	[1200]	[1400]	[1600]	[1700]	[1850]	Max. Continuous	Max. Inter-mittent
	14	28	41	55	69	83	97	110	117		[2050]	141
[2]	[372]	[776]	[1182]	[1567]	[1952]	[2317]	[2682]	[3039]	[2925]			
7.6	42	88	134	177	221	262	303	341	330			
	32	32	31	30	28	28	22	21	19			
[4]	[364]	[764]	[1178]	[1572]	[1979]	[2346]	[2714]	[3078]	[3255]	[3871]		
15.1	41	86	133	178	224	265	307	348	368	437		
	65	65	64	63	62	62	60	58	57	54		
[6]	[345]	[750]	[1156]	[1564]	[1958]	[2342]	[2710]	[3087]	[3265]	[3875]		
22.7	39	85	131	177	221	265	306	349	369	438		
	97	97	97	96	95	93	91	87	85	74		
[8]	[320]	[723]	[1128]	[1530]	[1928]	[2315]	[2702]	[3073]	[3254]	[3877]		
30.3	36	82	127	173	218	262	305	347	368	438		
	130	130	129	129	128	126	123	121	118	108		
[10]	[288]	[693]	[1098]	[1492]	[1896]	[2280]	[2675]	[3050]	[3228]	[3858]		
37.9	33	78	124	169	214	258	302	345	365	436		
	162	162	162	161	160	158	156	152	150	140		
[12]	[239]	[654]	[1047]	[1453]	[1849]	[2238]	[2637]	[3016]	[3199]	[3825]		
45.4	27	74	118	164	209	253	298	341	361	432		
	195	195	194	193	192	191	188	185	183	174		
[14]	[194]	[608]	[1004]	[1402]	[1798]	[2199]	[2583]	[2963]	[3147]	[3786]		
53.0	22	69	113	158	203	248	292	335	356	428		
	227	227	227	225	225	223	221	218	216	206		
[15]	[169]	[577]	[977]	[1375]	[1768]	[2170]	[2557]	[2936]	[3121]	[3766]		

Performance Data S Series

Motors run with high efficiency in all areas designated with a number for torque and speed, however for best motor life select a motor to run with a torque and speed range shown in the light blue area.

		293 cm ³ /r [17.9 in ³ /r] Δ Pressure Bar [PSI] Continuous										Max. Contin- uous	Max. Inter- mittent
		[200]	[400]	[600]	[800]	[1000]	[1200]	[1400]	[1500]			[1800]	
		14	28	41	55	69	83	97	103			124	
Flow LPM [GPM]	[2]	[471]	[990]	[1502]	[1995]	[2393]	[2837]	[3270]					
	7,6	53	112	170	225	270	321	369					
		26	25	25	24	20	17	12					
	[4]	[465]	[988]	[1502]	[2001]	[2499]	[2967]	[3413]	[3638]			[4295]	
	15,1	53	112	170	226	282	335	386	411			485	
		51	51	50	50	49	49	47	46			42	
	[6]	[443]	[959]	[1474]	[1985]	[2477]	[2955]	[3415]	[3641]			[4293]	
22,7	50	108	167	224	280	334	386	411			485		
	77	77	76	76	75	73	69	67			59		
[8]	[411]	[927]	[1433]	[1946]	[2439]	[2916]	[3402]	[3624]			[4269]		
30,3	46	105	162	220	276	329	384	409			482		
	102	102	102	102	101	100	95	93			84		
[10]	[372]	[882]	[1393]	[1890]	[2399]	[2872]	[3354]	[3583]			[4251]		
37,9	42	100	157	214	271	324	379	405			480		
	128	128	128	127	126	125	122	119			112		
[12]	[318]	[837]	[1340]	[1844]	[2340]	[2820]	[3308]	[3543]			[4235]		
45,4	36	95	151	208	264	319	374	400			478		
	153	153	153	153	152	150	147	145			137		
[14]	[253]	[773]	[1281]	[1784]	[2275]	[2770]	[3251]	[3482]			[4166]		
53,0	29	87	145	202	257	313	367	393			471		
	179	179	179	178	178	176	173	171			164		
Max. Continuous	[15]	[225]	[738]	[1244]	[1748]	[2240]	[2731]	[3218]	[3450]			[4136]	
	25	83	141	197	253	309	364	390			467		
	192	192	191	191	190	189	185	183			177		
Max. Intermittent	[20]		[558]	[1077]	[1577]	[2065]	[2546]	[3010]	[3230]				
	75,7		63	122	178	233	288	340	365				
			256	255	255	254	253	250	247				

		370 cm ³ /r [22.6 in ³ /r] Δ Pressure Bar [PSI] Continuous										Max. Contin- uous	Max. Inter- mittent
		[200]	[400]	[600]	[800]	[1000]	[1200]	[1300]	[1500]				
		14	28	41	55	69	83	90	103				
Flow LPM [GPM]	[2]	[593]	[1256]	[1898]	[2525]	[3082]	[3655]	[3935]					
	7,6	67	142	214	285	348	413	445					
		21	20	20	19	14	10	7					
	[4]	[590]	[1270]	[1905]	[2534]	[3139]	[3734]	[4004]	[4544]				
	15,1	67	143	215	286	355	422	452	513				
		41	41	40	40	39	39	38	37				
	[6]	[566]	[1218]	[1869]	[2506]	[3117]	[3708]	[3996]	[4548]				
22,7	64	138	211	283	352	419	451	514					
	62	61	61	60	60	57	55	50					
[8]	[524]	[1181]	[1810]	[2461]	[3069]	[3652]	[3956]	[4523]					
30,3	59	133	205	278	347	413	447	511					
	82	82	81	81	80	79	77	71					
[10]	[477]	[1117]	[1757]	[2381]	[3019]	[3596]	[3889]	[4459]					
37,9	54	126	199	269	341	406	439	504					
	102	102	101	101	100	99	97	93					
[12]	[419]	[1067]	[1705]	[2326]	[2945]	[3533]	[3830]	[4416]					
45,4	47	121	193	263	333	399	433	499					
	123	122	122	122	120	119	118	113					
[14]	[328]	[976]	[1625]	[2259]	[2862]	[3470]	[3768]	[4348]					
53,0	37	110	184	255	323	392	426	491					
	143	143	143	142	141	140	138	133					
Max. Continuous	[15]	[297]	[939]	[1576]	[2210]	[2824]	[3418]	[3721]	[4309]				
	34	106	178	250	319	386	420	487					
	153	153	153	152	151	150	148	144					
Max. Intermittent	[20]		[729]	[1387]	[2001]	[2604]	[3186]	[3482]					
	75,7		82	157	226	294	360	393					
			203	203	202	202	201	199					




Performance data is typical at 120 SUS. Actual data may vary slightly from unit to unit in production

Dimensions S Series



2 Bolt Flange

82,55/82,42
[3.250/3.245]
Pilot Dia.

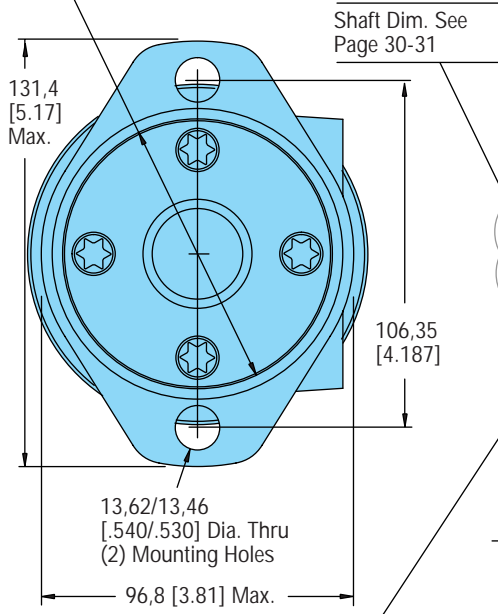

Groove Provided for 82,6 [3.25] I.D. x 2,62 [.103] Cross Section O-ring (Dash No. 152)


Standard Rotation
Viewed from Shaft End
Port A Pressurized — CW
Port B Pressurized — CCW

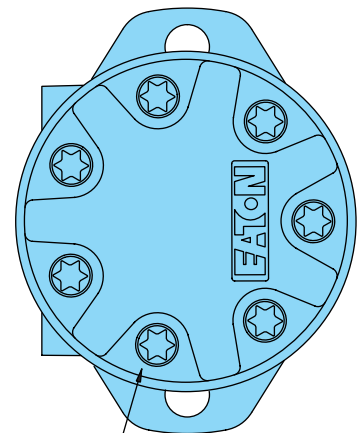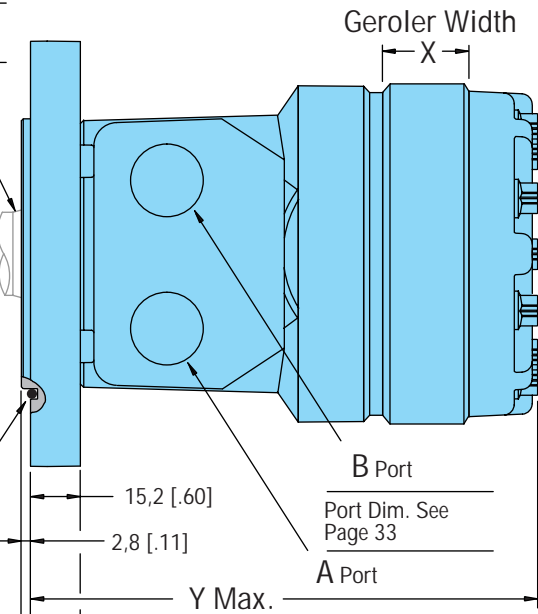

Standard Motor End Cap
End Cap with Case Drain Port See Page 34

4 Bolt Flange

41,4 [1.63] (2)

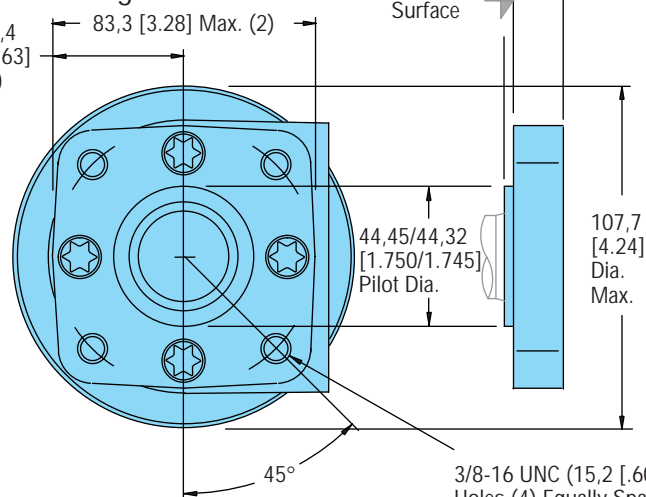

3/8-16 UNC (15,2 [.60] Max. Bolt Thread Engagement) Mounting Holes (4) Equally Spaced on 82,6 [3.25] Dia. Bolt Circle or M10 x 1,5 (15,2 [.60] Max. Bolt Thread Engagement) Mounting Holes (4) Equally Spaced on 82,6 [3.25] Dia. Bolt Circle

Displ. cm ³ /r [in ³ /r]	X	Y Max.
	Width mm [in.]	Length mm [in.]
59 [3.6]	10,2 [.40]	139,2 [5.48]
74 [4.5]	10,2 [.40]	139,2 [5.48]
97 [5.9]	13,2 [.52]	142,3 [5.60]
120 [7.3]	16,5 [.65]	145,6 [5.73]
146 [8.9]	20,1 [.79]	149,1 [5.87]
159 [9.7]	21,9 [.86]	150,9 [5.94]
185 [11.3]	25,4 [1.00]	154,5 [6.08]
231 [14.1]	31,8 [1.25]	160,8 [6.33]
293 [17.9]	40,4 [1.59]	169,5 [6.67]
370 [22.6]	50,8 [2.00]	179,9 [7.08]

Note: Mounting Surface Flatness Requirement is ∇ ,13 mm [.005 inch] Max.


Product Numbers S Series 103-xxxx

Product Numbers—S Series

Add three digit prefix —103—to four digit number from chart for complete product number—Example 103-1537.
Orders will not be accepted without three digit prefix.

Mounting	Shaft	Ports	Displ. cm ³ /r [in ³ /r] Product Number 103-xxxx									
			59 [3.6]	74 [4.5]	97 [5.9]	120 [7.3]	146 [8.9]	159 [9.7]	185 [11.3]	231 [14.1]	293 [17.9]	370 [22.6]
2 Bolt Flange	1 in. Straight w/Woodruff Key	7/8-14 O-ring	103-1537	-1034	-1035	-1538	-1539	-1036	-1037	-1038	-1039	-1040
		1/2 NPTF	103-1540	-1026	-1027	-1541	-1542	-1028	-1029	-1030	-1031	-1032
		Manifold*	103-1543	-1042	-1043	-1544	-1545	-1044	-1045	-1046	-1047	-1048
	1 in. SAE 6B Splined	7/8-14 O-ring	103-1552	-1082	-1083	-1553	-1554	-1084	-1085	-1086	-1087	-1088
		1/2 NPTF	103-1555	-1074	-1075	-1556	-1557	-1076	-1077	-1078	-1079	-1080
		Manifold*	103-1558	-1090	-1091	-1559	-1560	-1092	-1093	-1094	-1095	-1096
4 Bolt Flange	1 in. Straight w/Woodruff Key	7/8-14 O-ring	103-1570	-1010	-1011	-1571	-1572	-1012	-1013	-1014	-1015	-1016
		1/2 NPTF	103-1573	-1002	-1003	-1574	-1575	-1004	-1005	-1006	-1007	-1008
		Manifold*	103-1576	-1018	-1019	-1577	-1578	-1020	-1021	-1022	-1023	-1024
	1 in. SAE 6B Splined	7/8-14 O-ring	103-1579	-1058	-1059	-1580	-1581	-1060	-1061	-1062	-1063	-1064
		1/2 NPTF	103-1582	-1050	-1051	-1583	-1584	-1052	-1053	-1054	-1055	-1056
		Manifold*	103-1585	-1066	-1067	-1586	-1587	-1068	-1069	-1070	-1071	-1072

*Manifold product numbers shown are for motors with four 5/16-18 port face mounting threads. Manifold, manifold mounting o-rings and bolts are NOT included (for M8 x 1.5 port face mounting threads see note below).




Product Numbers—S Series Motors with Corrosion Protection

Shaft	Mounting	Ports	Displ. cu. cm/rev. [cu. in./rev.] Product Number 103-xxxx									
			59 [3.6]	74 [4.5]	97 [5.9]	120 [7.3]	146 [8.9]	159 [9.7]	185 [11.3]	231 [14.1]	293 [17.9]	370 [22.6]
1 in. Straight w/Woodruff Key	2 Bolt Flange	7/8-14 O-ring	103-1645							-1649	-1650	
	4 Bolt Flange	1/2 NPTF								-1620	-1621	

For S Series Motors with a configuration Not Shown in the charts above: Use the model code number system on page 38 to specify the product in detail.

For Product Numbers—S Series Motors with Low Speed Valving — See Page 28.

Specifications T Series

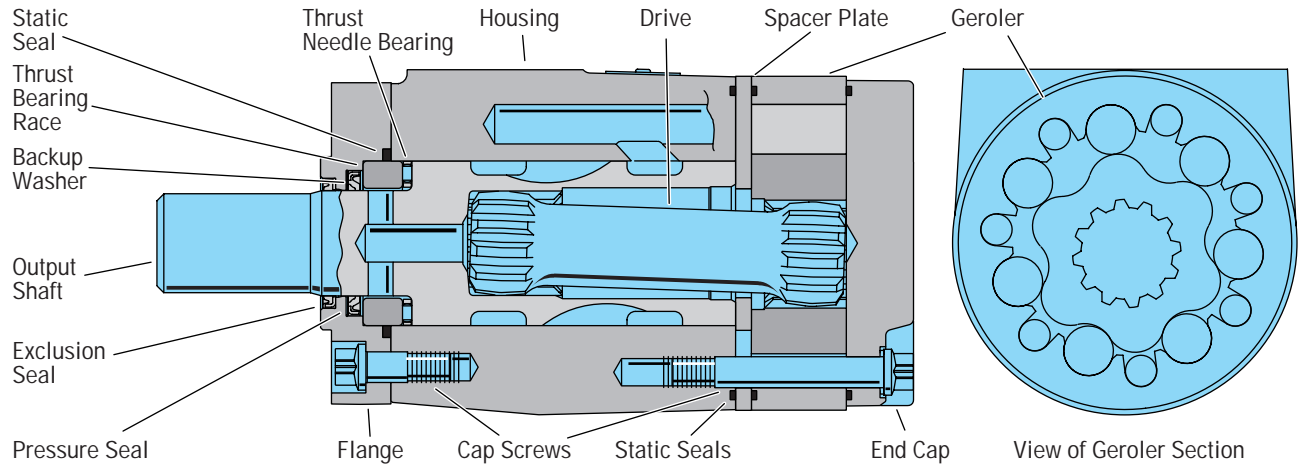

Specification Data —T Series

Displ. cm ³ /r [in ³ /r]		36 [2.2]	49 [3.0]	66 [4.0]	80 [4.9]	102 [6.2]	131 [8.0]	157 [9.6]	195 [11.9]	244 [14.9]	306 [18.7]	370 [22.6]
Max. Speed (RPM) @ Continuous Flow		1021	906	849	694	550	426	355	287	229	183	152
Flow LPM [GPM]	Continuous	38 [10]	45 [12]	57 [15]	57 [15]	57 [15]	57 [15]	57 [15]	57 [15]	57 [15]	57 [15]	57 [15]
	Intermittent	38 [10]	57 [15]	68 [18]	76 [20]	76 [20]	76 [20]	76 [20]	76 [20]	76 [20]	76 [20]	76 [20]
Torque Nm [lb-in]	Continuous	76 [672]	105 [928]	138 [1222]	174 [1541]	219 [1936]	251 [2226]	297 [2628]	359 [3178]	410 [3633]	441 [3905]	430 [3811]
	Intermittent **	93 [824]	118 [1131]	168 [1488]	212 [1872]	264 [2339]	307 [2718]	359 [3178]	437 [3864]	485 [4290]	483 [4275]	486 [4300]
Pressure Δ Bar [Δ PSI]	Continuous*	155 [2250]	155 [2250]	155 [2250]	155 [2250]	155 [2250]	138 [2000]	138 [2000]	138 [2000]	127 [1850]	110 [1600]	90 [1300]
	Intermittent**	190 [2750]	190 [2750]	190 [2750]	190 [2750]	190 [2750]	172 [2500]	172 [2500]	172 [2500]	155 [2250]	124 [1800]	103 [1500]

Maximum Case Pressure w/o Case Drain — 103 Bar [1500 PSI] see pages 34-35.

- * Maximum intermittent pressure at motor inlet port of 190 Bar [2750 PSI] without regard to Δ Bar [Δ PSI] and/or back pressure ratings or combination thereof.
- ** A simultaneous maximum torque and maximum speed NOT recommended.
6B Splined or Tapered shafts are recommended whenever operating above 282 Nm [2500 lb-in] of torque, especially for those applications subject to frequent reversals (see page 30).
Δ Bar [Δ PSI]— True pressure difference between inlet port and outlet port.
Continuous Rating — Motor may be run continuously at these ratings.
Intermittent Operation — 10% of every minute.
Recommended Fluids — Premium quality, anti-wear type hydraulic oil with a viscosity of not less than 70 SUS at operating temperature (see page 36).
Recommended Maximum System Operating Temp. — Is 82° C [180° F]
Recommended Filtration — per ISO Cleanliness Code, level 18/13

To assure best motor life, run motor for approximately one hour at 30% of rated pressure before application to full load. Be sure motor is filled with fluid prior to any load applications.

Performance Data T Series

Motors run with high efficiency in all areas designated with a number for torque and speed, however for best motor life select a motor to run with a torque and speed range shown in the light blue area.

36 cm³/r [2.2 in³/r]
Δ Pressure Bar [PSI]
Continuous

		[200]	[400]	[600]	[800]	[1000]	[1200]	[1400]	[1600]	[1800]	[2000]	[2200]	[2250]	[2750]
		14	28	41	55	69	83	97	110	124	138	152	155	190
Flow LPM [GPM]	[2]	[50] 6	[110] 12	[172] 19	[233] 26	[291] 33	[348] 39	[401] 45	[455] 51	[501] 57	[546] 62	[590] 67	[596] 67	[635] 72
	7,6	209	203	197	191	189	181	167	164	153	139	122	116	64
	[4]	[50] 6	[109] 12	[172] 19	[233] 26	[296] 33	[355] 40	[414] 47	[475] 54	[534] 60	[584] 66	[646] 73	[659] 74	[786] 89
	15,1	415	411	398	388	384	381	368	357	354	323	304	302	283
	[6]	[43] 5	[108] 12	[171] 19	[233] 26	[298] 34	[361] 41	[420] 47	[479] 54	[538] 61	[595] 67	[657] 74	[672] 76	[824] 93
22,7	617	613	602	595	585	570	563	558	534	520	504	496	425	
[8]	[39] 4	[101] 11	[164] 19	[226] 26	[292] 33	[354] 40	[415] 47	[475] 54	[538] 61	[592] 67	[656] 74	[670] 76	[819] 92	
30,3	821	815	803	797	784	774	758	747	732	707	688	680	607	
Max. Continuous	[10]	[30] 3	[93] 11	[155] 18	[214] 24	[278] 31	[342] 39	[406] 46	[473] 53	[532] 60	[590] 67	[650] 73	[668] 75	[805] 91
	37,9	1021	1014	1002	999	981	965	953	937	921	903	880	873	799

[93] Torque [lb-in]
11 Nm
1014 Speed RPM

49 cm³/r [3.0 in³/r]
Δ Pressure Bar [PSI]
Continuous

		[200]	[400]	[600]	[800]	[1000]	[1200]	[1400]	[1600]	[1800]	[2000]	[2200]	[2250]	[2750]
		14	28	41	55	69	83	97	110	124	138	152	155	190
Flow LPM [GPM]	[2]	[73] 8	[161] 18	[245] 28	[327] 37	[408] 46	[486] 55	[563] 64	[641] 72	[710] 80	[786] 89	[849] 96	[866] 98	[1023] 116
	7,6	152	152	148	147	142	141	134	124	115	109	95	92	58
	[4]	[72] 8	[160] 18	[246] 28	[329] 37	[416] 47	[500] 56	[584] 66	[668] 75	[746] 84	[825] 93	[901] 102	[922] 104	[1123] 127
	15,1	303	298	294	290	276	273	265	261	245	243	235	228	152
	[6]	[58] 7	[148] 17	[234] 26	[326] 37	[413] 47	[500] 56	[583] 66	[663] 75	[746] 84	[827] 93	[909] 103	[928] 105	[1131] 128
22,7	461	450	445	438	434	421	419	410	407	389	376	373	344	
[8]	[44] 5	[127] 14	[216] 24	[306] 35	[392] 44	[480] 54	[566] 64	[652] 74	[734] 83	[815] 92	[897] 101	[917] 104	[1125] 127	
30,3	607	603	600	590	583	576	564	554	545	536	522	520	503	
Max. Continuous	[10]	[39] 4	[128] 14	[213] 24	[302] 34	[391] 44	[477] 54	[562] 63	[647] 73	[731] 83	[815] 92	[897] 101	[917] 104	[1121] 127
	37,9	755	750	745	738	732	719	713	702	696	682	663	661	638
Max. Inter-mittent	[12]	[33] 4	[119] 13	[203] 23	[291] 33	[378] 43	[464] 52	[551] 62	[635] 72	[719] 81	[802] 91	[883] 100	[900] 96	[1061] 120
	45,4	906	902	895	883	875	862	859	844	835	819	806	804	788
	[15]	[26] 3	[86] 10	[172] 19	[256] 29	[342] 39	[430] 49	[505] 57	[591] 67	[674] 76	[745] 84	[830] 94	[851] 96	
	56,8	1132	1124	1113	1115	1106	1106	1098	1093	1079	1070	1058	1056	

Performance data is typical at 120 SUS. Actual data may vary slightly from unit to unit in production

Performance Data T Series

Motors run with high efficiency in all areas designated with a number for torque and speed, however for best motor life select a motor to run with a torque and speed range shown in the light blue area.

66 cm³/r [4.0 in³/r]
Δ Pressure Bar [PSI]
Continuous

		[200]	[400]	[600]	[800]	[1000]	[1200]	[1400]	[1600]	[1800]	[2000]	[2200]	[2250]	[2750]	
		14	28	41	55	69	83	97	110	124	138	152	155	190	
Flow LPM [GPM]	[2] 7,6	[78] 9 114	[191] 22 111	[303] 34 110	[414] 47 107	[522] 59 105	[625] 71 101	[706] 80 96	[804] 91 101	[898] 101 87	[991] 112 81	[1081] 122 73	[1103] 125 72	[1318] 149 48	
	[4] 15,1	[97] 11 229	[209] 24 229	[325] 37 217	[441] 50 216	[548] 62 212	[657] 74 205	[766] 87 194	[873] 99 190	[972] 110 186	[1077] 122 183	[1181] 133 181	[1205] 136 178	[1437] 162 170	
	[6] 22,7	[79] 9 344	[192] 22 343	[309] 35 335	[426] 48 334	[534] 60 321	[649] 73 320	[760] 86 319	[874] 99 315	[984] 111 291	[1090] 123 288	[1190] 134 279	[1218] 138 276	[1488] 168 270	
	[8] 30,3	[75] 8 456	[191] 22 451	[304] 34 447	[419] 47 442	[532] 60 431	[645] 73 426	[759] 86 419	[871] 98 415	[982] 111 412	[1092] 123 401	[1197] 135 391	[1222] 138 386	[1458] 165 339	
	[10] 37,9	[49] 6 569	[163] 18 565	[283] 32 560	[398] 45 552	[509] 58 547	[623] 70 541	[742] 84 532	[856] 97 525	[971] 110 512	[1080] 122 504	[1186] 134 498	[1209] 137 496	[1425] 161 475	
	[12] 45,4	[24] 3 681	[156] 18 678	[270] 31 671	[385] 43 665	[502] 57 658	[614] 69 651	[729] 82 641	[845] 95 635	[963] 109 623	[1067] 121 612	[1182] 134 604	[1209] 137 601	[1472] 166 571	
	[14] 53,0	[19] 2 793	[143] 16 788	[261] 29 787	[370] 42 778	[485] 55 771	[602] 68 762	[718] 81 753	[837] 95 746	[948] 107 733	[1064] 120 723	[1175] 133 715	[1199] 135 711	[1436] 162 677	
	Max. Continuous	[15] 1 56,8	[13] 14 849	[120] 27 844	[236] 40 839	[352] 53 832	[471] 67 826	[590] 80 819	[707] 93 806	[823] 106 800	[939] 119 786	[1052] 132 779	[1165] 137 770	[1192] 135 766	[1462] 165 725
	Max. Intermittent	[18] 68,1	[107] 12 1006	[215] 24 1003	[326] 37 998	[442] 50 988	[555] 63 976	[669] 76 975	[786] 89 965	[900] 102 952	[1016] 115 940	[1123] 127 924	[1152] 130 919		

80 cm³/r [4.9 in³/r]
Δ Pressure Bar [PSI]
Continuous

		[200]	[400]	[600]	[800]	[1000]	[1200]	[1400]	[1600]	[1800]	[2000]	[2200]	[2250]	[2750]	
		14	28	41	55	69	83	97	110	124	138	152	155	190	
Flow LPM [GPM]	[2] 7,6	[123] 14 93	[265] 30 90	[405] 46 86	[544] 61 83	[680] 77 80	[804] 91 75	[934] 106 70	[1052] 119 63	[1181] 133 57	[1079] 122 43	[937] 106 24	[895] 101 20		
	[4] 15,1	[120] 14 187	[264] 30 185	[406] 46 183	[551] 62 179	[689] 78 175	[828] 94 171	[965] 109 166	[1101] 124 162	[1237] 140 156	[1369] 155 150	[1505] 170 142	[1537] 174 140	[1857] 210 121	
	[6] 22,7	[113] 13 279	[255] 29 275	[398] 45 271	[542] 61 267	[682] 77 265	[823] 93 258	[963] 109 253	[1101] 124 248	[1239] 140 240	[1373] 155 232	[1508] 170 223	[1541] 174 221	[1868] 211 198	
	[8] 30,3	[99] 11 372	[243] 27 367	[386] 44 364	[528] 60 359	[669] 76 354	[812] 92 351	[954] 108 343	[1094] 124 338	[1233] 139 333	[1368] 155 324	[1503] 170 315	[1537] 174 313	[1872] 212 289	
	[10] 37,9	[84] 9 463	[228] 26 460	[371] 42 456	[514] 58 450	[655] 74 446	[798] 90 441	[941] 106 435	[1080] 122 428	[1219] 138 420	[1357] 153 412	[1496] 169 403	[1530] 173 399	[1870] 211 368	
	[12] 45,4	[63] 7 557	[209] 24 552	[354] 40 547	[498] 56 543	[638] 72 537	[782] 88 530	[926] 105 523	[1067] 121 515	[1208] 136 509	[1346] 152 500	[1484] 168 489	[1520] 177 472	[1864] 210 470	
	[14] 53,0	[55] 6 649	[185] 21 646	[331] 37 642	[476] 54 635	[620] 70 630	[762] 86 622	[904] 102 616	[1046] 118 609	[1188] 134 599	[1327] 150 592	[1467] 166 581	[1502] 170 578	[1842] 208 550	
	Max. Continuous	[15] 6 56,8	[51] 20 694	[176] 36 691	[316] 43 687	[463] 52 680	[609] 69 673	[748] 85 668	[891] 101 660	[1037] 117 650	[1177] 133 642	[1316] 149 634	[1457] 165 622	[1491] 168 619	[1844] 208 598
	Max. Intermittent	[20] 75,7	[160] 18 916	[305] 34 910	[455] 51 893	[578] 65 893	[737] 83 875	[857] 97 866	[968] 109 877	[1144] 129 843	[1277] 144 833	[1412] 160 839	[1446] 163 836		

[176]
20
691 } Torque [lb-in]
Nm
Speed RPM

Performance data is typical at 120 SUS. Actual data may vary slightly from unit to unit in production

Performance Data T Series

Motors run with high efficiency in all areas designated with a number for torque and speed, however for best motor life select a motor to run with a torque and speed range shown in the light blue area.

102 cm³/r [6.2 in³/r]
Δ Pressure Bar [PSI]
Continuous

	[200]	[400]	[600]	[800]	[1000]	[1200]	[1400]	[1600]	[1800]	[2000]	[2200]	[2250]	[2750]
	14	28	41	55	69	83	97	110	124	138	152	155	190
[2]	[161]	[341]	[519]	[697]	[871]	[1030]	[1193]	[1349]	[1511]	[1496]	[1441]	[1421]	
	18	39	59	79	98	116	135	152	171	169	163	161	
7,6	73	71	68	66	63	60	56	51	46	36	23	20	
[4]	[157]	[340]	[520]	[702]	[879]	[1056]	[1229]	[1401]	[1567]	[1727]	[1889]	[1925]	[2271]
	18	38	59	79	99	119	139	158	177	195	213	217	257
15,1	149	146	144	141	138	135	131	128	124	118	111	109	92
[6]	[147]	[329]	[510]	[692]	[871]	[1050]	[1227]	[1401]	[1571]	[1731]	[1895]	[1936]	[2339]
	17	37	58	78	98	119	139	158	178	196	214	219	264
22,7	221	217	214	211	208	204	199	195	190	184	176	174	154
[8]	[132]	[315]	[497]	[675]	[857]	[1038]	[1216]	[1392]	[1564]	[1725]	[1891]	[1932]	[2326]
	15	36	56	76	97	117	137	157	177	195	214	218	263
30,3	294	290	287	284	280	277	271	267	262	255	247	245	220
[10]	[109]	[293]	[477]	[657]	[839]	[1018]	[1198]	[1374]	[1542]	[1711]	[1878]	[1918]	[2326]
	12	33	54	74	95	115	135	155	174	193	212	217	263
37,9	367	363	360	355	351	347	343	337	332	325	318	315	287
[12]	[84]	[271]	[457]	[638]	[818]	[999]	[1179]	[1354]	[1527]	[1697]	[1858]	[1901]	[2323]
	9	31	52	72	92	113	133	153	173	192	210	215	262
45,4	440	436	432	429	424	419	414	409	402	395	386	384	364
[14]	[59]	[242]	[428]	[611]	[794]	[974]	[1151]	[1328]	[1502]	[1674]	[1841]	[1883]	[2301]
	7	27	48	69	90	110	130	150	170	189	208	213	260
53,0	513	510	506	501	497	492	487	482	475	469	458	456	428
[15]	[39]	[227]	[411]	[595]	[780]	[957]	[1136]	[1314]	[1486]	[1658]	[1828]	[1869]	[2285]
	4	26	46	67	88	108	128	148	168	187	207	211	258
56,8	550	545	542	537	532	528	522	516	510	502	492	490	463
Max. Continuous	[20]	[154]	[328]	[515]	[710]	[874]	[1060]	[1243]	[1405]	[1579]	[1763]	[1803]	
Max. Inter-mittent	75,7	724	718	720	709	707	696	684	683	670	659	660	

131 cm³/r [8.0 in³/r]
Δ Pressure Bar [PSI]
Continuous

	[200]	[400]	[600]	[800]	[1000]	[1200]	[1400]	[1600]	[1800]	[2000]	[2500]
	14	28	41	55	69	83	97	110	124	138	172
[2]	[219]	[450]	[682]	[915]	[1144]	[1348]	[1561]	[1771]	[1979]	[2159]	
	25	51	77	103	129	152	176	200	224	244	
7,6	57	55	53	51	49	47	43	40	36	30	
[4]	[212]	[449]	[681]	[917]	[1148]	[1376]	[1600]	[1822]	[2025]	[2221]	[2629]
	24	51	77	104	130	155	181	206	229	251	297
15,1	115	113	110	109	107	105	102	99	96	91	75
[6]	[197]	[435]	[669]	[903]	[1139]	[1370]	[1600]	[1818]	[2032]	[2226]	[2718]
	22	49	76	102	129	155	181	205	230	252	307
22,7	171	168	166	163	160	157	154	150	147	142	125
[8]	[181]	[417]	[657]	[886]	[1122]	[1359]	[1589]	[1812]	[2022]	[2215]	[2699]
	20	47	74	100	127	154	180	205	228	250	305
30,3	227	225	222	219	217	213	209	206	202	196	175
[10]	[144]	[389]	[631]	[859]	[1098]	[1330]	[1562]	[1783]	[1993]	[2198]	[2687]
	16	44	71	97	124	150	176	201	225	248	304
37,9	284	281	278	275	271	267	265	261	258	252	231
[12]	[114]	[361]	[605]	[838]	[1075]	[1307]	[1532]	[1755]	[1965]	[2177]	[2671]
	13	41	68	95	121	148	173	198	222	246	302
45,4	341	338	334	332	328	325	321	318	312	307	285
[14]	[82]	[327]	[569]	[803]	[1042]	[1273]	[1498]	[1722]	[1935]	[2147]	[2655]
	9	37	64	91	118	144	169	195	219	243	300
53,0	397	394	391	387	384	361	378	374	370	365	339
[15]	[66]	[302]	[550]	[785]	[1025]	[1254]	[1480]	[1704]	[1915]	[2119]	[2648]
	7	34	62	89	116	142	167	193	216	239	299
56,8	426	423	422	415	412	409	405	402	398	392	367
Max. Continuous	[20]	[177]	[429]	[678]	[908]	[1143]	[1375]	[1596]	[1811]	[2017]	
Max. Inter-mittent	75,7	565	560	556	553	549	546	541	536	527	

[302] Torque [lb-in]
34 Nm
423 Speed RPM

Performance data is typical at 120 SUS. Actual data may vary slightly from unit to unit in production

Performance Data T Series

Motors run with high efficiency in all areas designated with a number for torque and speed, however for best motor life select a motor to run with a torque and speed range shown in the light blue area.

157 cm³/r [9.6 in³/r]
Δ Pressure Bar [PSI]
Continuous

		[200]	[400]	[600]	[800]	[1000]	[1200]	[1400]	[1600]	[1800]	[2000]	Max. Continuous	Max. Inter-mittent
		14	28	41	55	69	83	97	110	124	138	[2500]	172
Flow LPM [GPM]	[2]	[264]	[541]	[819]	[1092]	[1357]	[1605]	[1847]	[2084]	[2311]	[1858]		
	7,6	30 47	61 45	93 44	123 42	153 40	181 37	209 34	235 30	261 25	210 16		
	[4]	[259]	[541]	[822]	[1101]	[1373]	[1638]	[1890]	[2145]	[2383]	[2613]	[3063]	
	15,1	29 96	61 95	93 92	124 91	155 90	185 88	214 85	242 82	269 78	295 73	346 60	
	[6]	[241]	[526]	[808]	[1090]	[1368]	[1638]	[1900]	[2150]	[2399]	[2628]	[3169]	
	22,7	27 142	59 140	91 138	123 136	155 134	185 132	215 129	243 125	271 121	297 114	358 99	
	[8]	[219]	[506]	[789]	[1068]	[1348]	[1625]	[1885]	[2140]	[2388]	[2619]	[3178]	
	30,3	25 189	57 187	89 185	121 183	152 181	184 178	213 175	242 172	270 166	296 159	359 140	
	[10]	[180]	[472]	[759]	[1037]	[1319]	[1590]	[1853]	[2111]	[2355]	[2594]	[3170]	
	37,9	20 237	53 234	86 232	117 230	149 227	180 224	209 222	239 218	266 211	293 203	358 183	
[12]	[141]	[436]	[728]	[1010]	[1292]	[1561]	[1821]	[2079]	[2331]	[2573]	[3162]		
45,4	16 284	49 282	82 279	114 277	146 274	176 272	206 269	235 265	263 257	291 248	357 225		
[14]	[101]	[397]	[687]	[969]	[1252]	[1519]	[1778]	[2040]	[2295]	[2539]	[3147]		
53,0	11 332	45 329	78 326	109 323	141 321	172 319	201 316	230 311	259 305	287 296	356 274		
[15]	[81]	[367]	[665]	[944]	[1231]	[1497]	[1755]	[2018]	[2273]	[2512]	[3136]		
Max. Continuous	56,8	9 355	41 353	75 350	107 347	139 344	169 342	198 339	228 334	257 327	284 318	354	300
Max. Inter-mittent	75,7	[20]	[221]	[519]	[814]	[1095]	[1368]	[1631]	[1891]	[2149]	[2396]		
			25 472	59 467	92 464	124 462	155 459	184 455	214 450	243 443	271 433		

195 cm³/r [11.9 in³/r]
Δ Pressure Bar [PSI]
Continuous

		[200]	[400]	[600]	[800]	[1000]	[1200]	[1400]	[1600]	[1750]	[1800]	[2000]	Max. Continuous	Max. Inter-mittent
		14	28	41	55	69	83	97	110	121	125	138	[2500]	172
Flow LPM [GPM]	[2]	[330]	[671]	[1016]	[1345]	[1654]	[1969]	[2242]	[2507]	[2689]	[2748]	[2973]		
	7,6	37 38	76 36	115 34	152 33	187 31	222 28	253 25	283 20	304 16	310 14	336 8		
	[4]	[328]	[675]	[1026]	[1366]	[1692]	[2010]	[2289]	[2586]	[2799]	[2867]	[3144]	[3797]	
	15,1	37 77	76 77	116 75	154 73	191 73	227 71	259 68	292 65	316 62	324 61	355 55	429 40	
	[6]	[306]	[658]	[1011]	[1360]	[1698]	[2021]	[2324]	[2604]	[2829]	[2901]	[3178]	[3831]	
	22,7	35 115	74 113	114 111	154 110	192 109	228 107	263 104	294 100	320 97	328 95	359 87	433 68	
	[8]	[272]	[634]	[980]	[1331]	[1675]	[2003]	[2300]	[2592]	[2815]	[2888]	[3174]	[3864]	
	30,3	31 153	72 151	111 150	150 148	189 146	226 144	260 142	293 139	318 134	326 132	359 123	437 99	
	[10]	[238]	[596]	[945]	[1296]	[1637]	[1960]	[2255]	[2565]	[2786]	[2857]	[3140]	[3816]	
	37,9	27 192	67 189	107 188	146 186	185 184	221 183	255 181	290 176	315 168	323 166	355 156	431 133	
[12]	[181]	[545]	[908]	[1260]	[1607]	[1924]	[2223]	[2529]	[2759]	[2836]	[3121]	[3807]		
45,4	20 230	62 228	103 226	142 222	182 221	217 221	251 219	286 213	312 207	320 204	353 192	430 160		
[14]	[154]	[500]	[860]	[1211]	[1556]	[1869]	[2175]	[2483]	[2713]	[2792]	[3080]	[3778]		
53,0	17 268	56 266	97 264	137 261	176 259	211 259	246 256	281 251	307 244	315 242	348 229	427 199		
[15]	[140]	[465]	[832]	[1179]	[1525]	[1835]	[2144]	[2459]	[2693]	[2768]	[3061]	[3764]		
Max. Continuous	56,8	16 287	53 285	94 283	133 281	172 279	207 278	242 275	278 269	304 262	313 260	346 247	425	220
Max. Inter-mittent	75,7	[20]	[291]	[653]	[1013]	[1366]	[1689]	[1987]	[2298]	[2540]	[2622]	[2928]		
			33 382	74 378	114 375	154 373	191 372	225 368	260 363	287 356	296 353	331 342		

[465] Torque [lb-in]
53 Nm
285 Speed RPM

Performance data is typical at 120 SUS. Actual data may vary slightly from unit to unit in production

Performance Data T Series

Motors run with high efficiency in all areas designated with a number for torque and speed, however for best motor life select a motor to run with a torque and speed range shown in the light blue area.

244 cm³/r [14.9 in³/r]
Δ Pressure Bar [PSI]
Continuous

	[200]	[400]	[600]	[800]	[1000]	[1200]	[1400]	[1600]	[1650]	[1800]	[1850]	Max. Continuous	Max. Inter-mittent
	14	28	41	55	69	83	97	110	114	125	127		[2250] 155
[2]	[406]	[833]	[1260]	[1655]	[2038]	[2403]	[2707]	[2597]	[2552]	[2373]	[2299]		
7.6	46 30	94 29	142 27	187 26	230 24	272 22	306 17	293 12	288 11	268 7	260 6		
[4]	[404]	[843]	[1277]	[1695]	[2083]	[2468]	[2820]	[3177]	[3261]	[3509]	[3589]		[4194]
15.1	46 62	95 62	144 60	192 59	235 59	279 57	319 55	359 50	368 49	396 46	406 44		474 35
[6]	[382]	[823]	[1261]	[1687]	[2088]	[2477]	[2843]	[3196]	[3285]	[3547]	[3633]		[4290]
22.7	43 92	93 91	142 90	191 89	236 88	280 86	321 82	361 78	371 76	401 72	410 71		485 60
[8]	[341]	[787]	[1220]	[1651]	[2059]	[2454]	[2820]	[3177]	[3265]	[3530]	[3615]		[4285]
30.3	39 123	89 122	138 121	187 120	233 119	277 116	319 113	359 108	369 106	399 101	408 99		484 85
[10]	[297]	[744]	[1177]	[1611]	[2017]	[2412]	[2774]	[3151]	[3241]	[3504]	[3593]		[4269]
37.9	34 154	84 152	133 151	182 150	228 148	273 146	313 143	356 136	366 134	396 127	406 125		482 107
[12]	[225]	[687]	[1132]	[1553]	[1967]	[2360]	[2734]	[3105]	[3194]	[3466]	[3554]		[4237]
45.4	25 184	78 183	128 181	175 180	222 179	267 177	309 173	351 166	361 163	392 156	402 153		479 134
[14]	[154]	[628]	[1072]	[1498]	[1910]	[2298]	[2674]	[3052]	[3148]	[3419]	[3510]		[4226]
53.0	17 214	71 213	121 212	169 211	216 209	260 207	302 202	345 195	356 193	386 185	397 182		477 161
[15]	[119]	[586]	[1035]	[1458]	[1872]	[2261]	[2637]	[3022]	[3116]	[3389]	[3488]		[4220]
Max. Continuous	13 229	66 228	117 227	165 226	212 224	255 222	298 217	341 209	352 207	383 200	394 197		477 174
Max. Inter-mittent	[20]	[372]	[816]	[1251]	[1663]	[2067]	[2448]	[2832]	[2928]	[3214]	[3312]		
	42 75.7	92 305	141 303	188 301	234 300	277 297	320 292	331 284	363 281	374 273	374 270		

306 cm³/r [18.7 in³/r]
Δ Pressure Bar [PSI]
Continuous

	[200]	[400]	[600]	[800]	[1000]	[1200]	[1400]	[1500]	[1600]	Max. Continuous	Max. Inter-mittent
	14	28	41	55	69	83	97	103	110	[1800]	[124]
[2]	[499]	[1035]	[1560]	[2034]	[2501]	[2912]	[3239]	[2859]	[2400]		
7.6	56 24	117 23	176 22	230 21	283 19	329 16	366 11	323 8	271 5		
[4]	[497]	[1052]	[1590]	[2101]	[2561]	[3023]	[3464]	[3680]	[3886]		[4221]
15.1	56 49	119 49	180 48	237 48	289 47	342 47	391 44	416 41	439 38		477 30
[6]	[480]	[1031]	[1578]	[2096]	[2564]	[3023]	[3464]	[3689]	[3905]		[4275]
22.7	54 74	116 74	178 72	237 71	290 71	342 69	391 64	417 62	441 60		483 51
[8]	[427]	[975]	[1520]	[2051]	[2525]	[2998]	[3448]	[3667]	[3881]		[4264]
30.3	48 99	110 98	172 97	232 97	285 96	339 94	390 89	414 86	438 83		482 73
[10]	[370]	[930]	[1467]	[2001]	[2477]	[2955]	[3406]	[3631]	[3852]		[4264]
37.9	42 123	105 122	166 121	226 120	280 120	334 117	385 112	410 108	435 104		482 92
[12]	[281]	[871]	[1410]	[1908]	[2400]	[2887]	[3352]	[3573]	[3790]		[4189]
45.4	32 147	98 146	159 145	216 145	271 145	326 142	379 136	404 131	428 127		473 112
[14]	[192]	[791]	[1338]	[1851]	[2338]	[2816]	[3281]	[3511]	[3743]		[4135]
53.0	22 171	89 171	151 170	209 169	264 169	318 165	371 159	397 154	423 150		467 133
[15]	[148]	[738]	[1288]	[1803]	[2287]	[2773]	[3243]	[3475]	[3705]		[4098]
Max. Continuous	17 183	83 183	146 182	204 182	258 181	313 177	366 171	393 165	419 160		463 146
Max. Inter-mittent	[20]	[476]	[1020]	[1544]	[2010]	[2519]	[3010]	[3243]	[3495]		
	54 75.7	115 243	174 242	227 241	285 241	340 238	366 231	395 226	419 209		

[738]
83 } Torque [lb-in]
183 } Nm
Speed RPM

370 cm³/r [22.6 in³/r]
Δ Pressure Bar [PSI]
Continuous

	[200]	[400]	[600]	[800]	[1000]	[1200]	[1300]	Max. Continuous	Max. Inter-mittent
	14	28	41	55	69	83	90	[1500]	[103]
[2]	[590]	[1237]	[1858]	[2406]	[2953]	[3388]	[3586]		
7.6	67 20	140 19	210 18	272 17	334 15	383 12	405 11		
[4]	[588]	[1263]	[1906]	[2506]	[3029]	[3557]	[3811]		[4252]
15.1	66 41	143 41	215 40	283 40	342 39	402 38	431 37		480 36
[6]	[580]	[1245]	[1899]	[2506]	[3029]	[3544]	[3788]		[4300]
22.7	66 61	141 60	215 60	283 59	342 58	400 57	428 56		486 54
[8]	[514]	[1164]	[1824]	[2452]	[2975]	[3518]	[3783]		[4284]
30.3	58 82	132 81	206 80	277 79	336 78	397 77	427 77		484 75
[10]	[444]	[1119]	[1759]	[2391]	[2928]	[3479]	[3750]		[4275]
37.9	50 102	126 102	199 101	270 101	331 100	393 97	424 96		483 93
[12]	[337]	[1062]	[1690]	[2256]	[2813]	[3393]	[3685]		[4273]
45.4	38 122	120 121	191 120	255 119	318 119	383 118	416 116		483 112
[14]	[231]	[958]	[1608]	[2201]	[2748]	[3319]	[3610]		[4198]
53.0	26 142	108 141	182 140	249 139	310 138	375 137	408 134		474 129
[15]	[178]	[896]	[1543]	[2147]	[2683]	[3272]	[3572]		[4187]
Max. Continuous	20 152	101 152	174 151	243 150	303 149	370 147	404 146		473 140
Max. Inter-mittent	[20]	[587]	[1228]	[1833]	[2331]	[2948]	[3273]		
	66 75.7	139 202	207 201	263 201	323 200	333 198	370 196		


Performance data is typical at 120 SUS. Actual data may vary slightly from unit to unit in production

Dimensions T Series


Note: Mounting Surface Flatness Requirement is ∇ ,13 mm [.005 inch] Max.

2 Bolt Flange

Standard Rotation
Viewed from Shaft End
Port A Pressurized — CW
Port B Pressurized — CCW

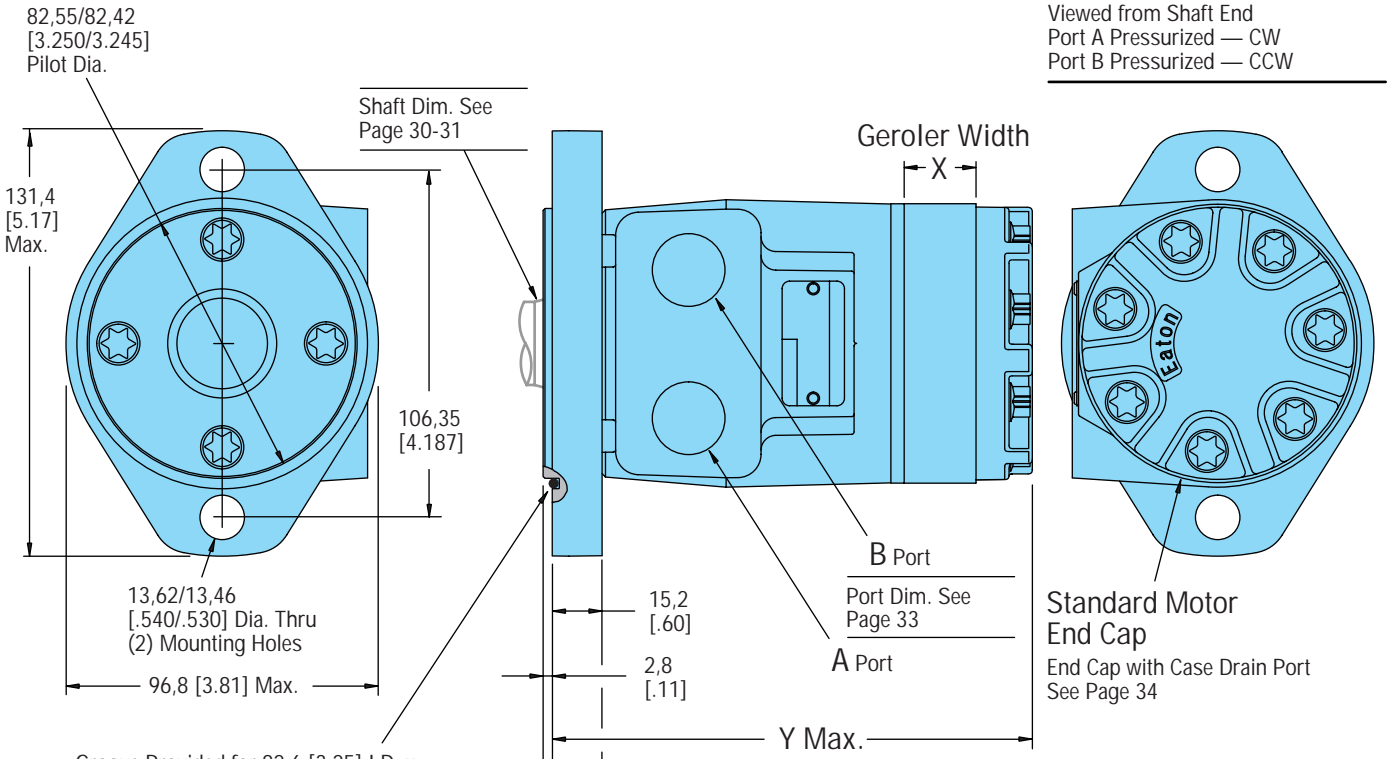

4 Bolt Flange

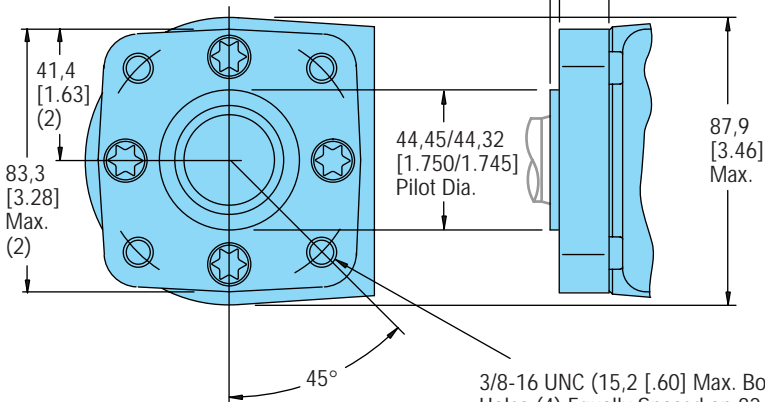

Displ. cm ³ /r [in ³ /r]	X	Y Max.
	Width mm [in.]	Length mm [in.]
36 [2.2]	6,6 [.26]	132,2 [5.21]
49 [3.0]	9,1 [.36]	134,6 [5.30]
66 [4.0]	12,2 [.48]	137,7 [5.42]
80 [4.9]	14,7 [.58]	140,3 [5.53]
102 [6.2]	18,5 [.73]	144,3 [5.68]
131 [8.0]	24,1 [.95]	149,6 [5.89]
157 [9.6]	29,0 [1.14]	154,5 [6.09]
195 [11.9]	35,6 [1.40]	161,3 [6.35]
244 [14.9]	44,7 [1.76]	170,3 [6.71]
306 [18.7]	56,1 [2.21]	181,6 [7.16]
370 [22.6]	72,1 [2.84]	197,9 [7.79]

3/8-16 UNC (15,2 [.60] Max. Bolt Thread Engagement) Mounting Holes (4) Equally Spaced on 82,6 [3.25] Dia. Bolt Circle
or
M10 x 1,5 (15,2 [.60] Max. Bolt Thread Engagement) Mounting Holes (4) Equally Spaced on 82,6 [3.25] Dia. Bolt Circle

Product Numbers


T Series 158-xxxx

Product Numbers—T Series

Add three digit prefix —158—to four digit number from chart for complete product number—Example 158-1068.
Orders will not be accepted without three digit prefix.

Mounting	Shaft	Ports	Displ. cm ³ /r [in ³ /r] Product Number 158-xxxx											
			36 [2.2]	49 [3.0]	66 [4.0]	80 [4.9]	102 [6.2]	131 [8.0]	157 [9.6]	195 [11.9]	244 [14.9]	306 [18.7]	370 [22.6]	
2 Bolt Flange	1 in. Straight w/Woodruff Key	7/8-14 O-ring	158-	—	—	-1537	-1034	-1035	-1538	-1036	-1037	-1038	-1039	-1040
		1/2 NPTF	158-	—	—	-1540	-1026	-1027	-1541	-1028	-1029	-1030	-1031	-1032
		Manifold*	158-	—	—	-1543	-1042	-1043	-1544	-1044	-1045	-1046	-1047	-1048
	1 in. SAE 6B Splined	7/8-14 O-ring	158-	—	—	-1552	-1082	-1083	-1553	-1084	-1085	-1086	-1087	-1088
		1/2 NPTF	158-	—	—	-1555	-1074	-1075	-1556	-1076	-1077	-1078	-1079	-1080
		Manifold*	158-	—	—	-1558	-1090	-1091	-1559	-1092	-1093	-1094	-1095	-1096
4 Bolt Flange	1 in. Straight w/Woodruff Key	7/8-14 O-ring	158-	—	—	-1570	-1010	-1011	-1571	-1012	-1013	-1014	-1015	-1016
		1/2 NPTF	158-	—	—	-1573	-1002	-1003	-1574	-1004	-1005	-1006	-1007	-1008
		Manifold*	158-	—	—	-1576	-1018	-1019	-1577	-1020	-1021	-1022	-1023	-1024
	1 in. SAE 6B Splined	7/8-14 O-ring	158	—	—	-1579	-1058	-1059	-1580	-1060	-1061	-1062	-1063	-1064
		1/2 NPTF	158-	—	—	-1582	-1050	-1051	-1583	-1052	-1053	-1054	-1055	-1056
		Manifold*	158-	—	—	-1585	-1066	-1067	-1586	-1068	-1069	-1070	-1071	-1072

*Manifold product numbers shown are for motors with four 5/16-18 port face mounting threads. Manifold, manifold mounting o-rings and bolts are NOT included (for M8 x 1,5 port face mounting threads see note below).



Product Numbers—T Series Motors with Corrosion Protection

Shaft	Mounting	Ports	Displ. cm ³ /r [cu. in ³ /r] Product Number 158-xxxx											
			36 [2.2]	49 [3.0]	66 [4.0]	80 [4.9]	102 [6.2]	131 [8.0]	157 [9.6]	195 [11.9]	244 [14.9]	306 [18.7]	370 [22.6]	
1 in. Straight w/Woodruff Key	2 Bolt Flange	7/8-14 O-ring	158-	—	—	—	-1645	—	—	—	—	-1649	—	-1650
	4 Bolt Flange	1/2 NPTF	158-	—	—	—	—	—	—	—	—	-1620	—	-1621

For T Series Motors with a configuration Not Shown in the charts above: Use the model code number system on page 39 to specify the product in detail.

For Product Numbers—T Series Motors with Low Speed Valving — See Page 28.

Specifications H, S Series and T Series with Low Speed Valving — Product Numbers

S Series and T Series w/LSV

These motors with the low speed valving option provide very low speed while maintaining high torque. Designed to run continuously at up to 200 RPM at standard rated pressures and reduced flows, providing smooth operation at low speeds. Furthermore, they resist slippage and have more momentary load holding ability than the standard H, and S Series motors. Motors with this valving are not intended for low pressure applications (41 Bar [600 PSI] Minimum). Shaft side / radial load ratings are not affected by this valving.

For H Series Motors with Low Speed Valving — Use the model code number system on page 37 to specify the product in detail.

Product Numbers—S Series Motors with Low Speed Valving

Mounting	Shaft	Ports	Displ. cm ³ /r [in ³ /r] Product Number 103-xxxx											
			59 [3.6]	74 [4.5]	97 [5.9]	120 [7.3]	146 [8.9]	159 [9.7]	185 [11.3]	231 [14.1]	293 [17.9]	370 [22.6]		
2 Bolt Flange	1 in. Straight w/Woodruff Key	7/8-14 O-ring	103-	—	-1427	-1428	—	—	-1429	-1430	-1431	-1432	-1433	
		1/2 NPTF	103-	—	-1419	-1420	—	—	-1421	-1422	-1423	-1424	-1425	
		Manifold*	103-	—	—	—	—	—	—	—	—	—	—	
	1 in. SAE 6B Splined	7/8-14 O-ring	103-	—	-1525	—	—	-2692	—	—	—	-1675	—	—
		1/2 NPTF	103-	—	—	-1634	—	—	—	—	—	—	—	—
		Manifold*	103-	—	-1522	-2678	—	—	—	—	—	—	—	-1527
4 Bolt Flange	1 in. Straight w/Woodruff Key	7/8-14 O-ring	103-	-1625	-1410	-1411	-1626	-2531	-1412	-1413	-1414	-1415	-1416	
		1/2 NPTF	103-	-1644	-1402	-1403	—	—	-1404	-1405	-1406	-1407	-1408	

*Manifold product numbers shown are for motors with four 5/16-18 port face mounting threads. Manifold, manifold mounting o-rings and bolts are NOT included (for M8 x 1,5 port face mounting threads see note below).

For S Series Motors with Low Speed Valving Not Shown in the chart above: Use the model code number system on page 38 to specify the product in detail.

Product Numbers—T Series Motors with Low Speed Valving

Mounting	Shaft	Ports	Displ. cm ³ /r [in ³ /r] Product Number 158-xxxx												
			36 [2.2]	49 [3.0]	66 [4.0]	80 [4.9]	102 [6.2]	131 [8.0]	157 [9.6]	195 [11.9]	244 [14.9]	306 [18.7]	370 [22.6]		
2 Bolt Flange	1 in. Straight w/Woodruff Key	7/8-14 O-ring	158-	—	—	—	-1427	-1428	—	—	-1430	-1431	-1432	-1433	
		1/2 NPTF	158-	—	—	—	-1419	-1420	—	—	-1422	-1423	-1424	-1425	
		Manifold*	158-	—	—	—	—	—	—	—	—	—	—	—	
	1 in. SAE 6B Splined	7/8-14 O-ring	158-	—	—	—	-1525	—	—	—	—	—	-1675	—	—
		1/2 NPTF	158-	—	—	—	—	-1634	—	—	—	—	—	—	—
		Manifold*	158-	—	—	—	-1522	-2678	—	—	—	—	—	—	-1527
4 Bolt Flange	1 in. Straight w/Woodruff Key	7/8-14 O-ring	158-	—	—	-1625	-1410	-1411	-1626	-1412	-1413	-1414	-1415	-1416	
		1/2 NPTF	158-	—	—	-1644	-1402	-1403	—	-1404	-1405	-1406	-1407	-1408	

*Manifold product numbers shown are for motors with four 5/16-18 port face mounting threads. Manifold, manifold mounting o-rings and bolts are NOT included (for M8 x 1,5 port face mounting threads see note below).

For T Series Motors with Low Speed Valving Not Shown in the chart above: Use the model code number system on page 39 to specify the product in detail.

Shaft Side Load Capacity H, S, Series and T Series

The hydrodynamic bearing has infinite life when shaft load ratings are not exceeded. Hence, the shaft side load capacity is more than adequate to handle most externally applied loads (such as belts, chains, etc.), providing the motor to shaft size is applied within its torque rating.

Allowable side load chart, shaft load location drawing and load curves (below) are based on the side / radial loads being applied to shaft at locations A, B, and C, to determine the shaft side load capacity at locations other than those shown use the formula (shown below). For more information about shaft side loads on Char-Lynn motors contact your Eaton representative.

Note: When the speed sensor option is used , the side load ratings are reduced 25%.


$$\text{Sideload P kg} = \frac{900}{N} \left(\frac{16800}{L + 96,3} \right) \quad \text{for 200-900 RPM}$$

$$\text{Sideload P [lb]} = \frac{900}{N} \left(\frac{1460}{L + [3.79]} \right) \quad \text{for 200-900 RPM}$$


Where N = Shaft Speed (RPM)

L = Distance from Mounting Surface

RPM	Allowable Shaft Side Load —Kg [lb]		
	A	B	C
900	154 [339]	136 [300]	118 [261]
625	205 [452]	181 [400]	158 [348]
500	256 [565]	227 [500]	197 [435]
400	307 [678]	272 [600]	237 [522]
300	410 [904]	363 [800]	316 [696]
200	718 [1582]	635 [1400]	552 [1216]

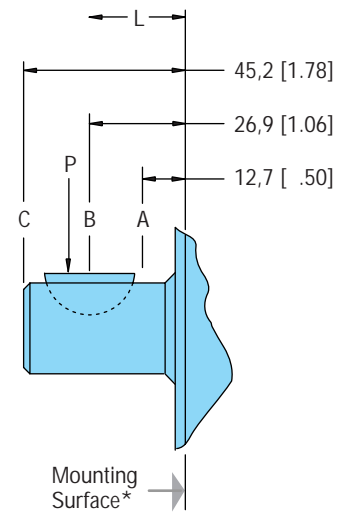



*2 Bolt SAE B mounting flange has a greater pilot thickness and a thinner mounting plate (end of shaft to flange, add 3,3 [.13]).

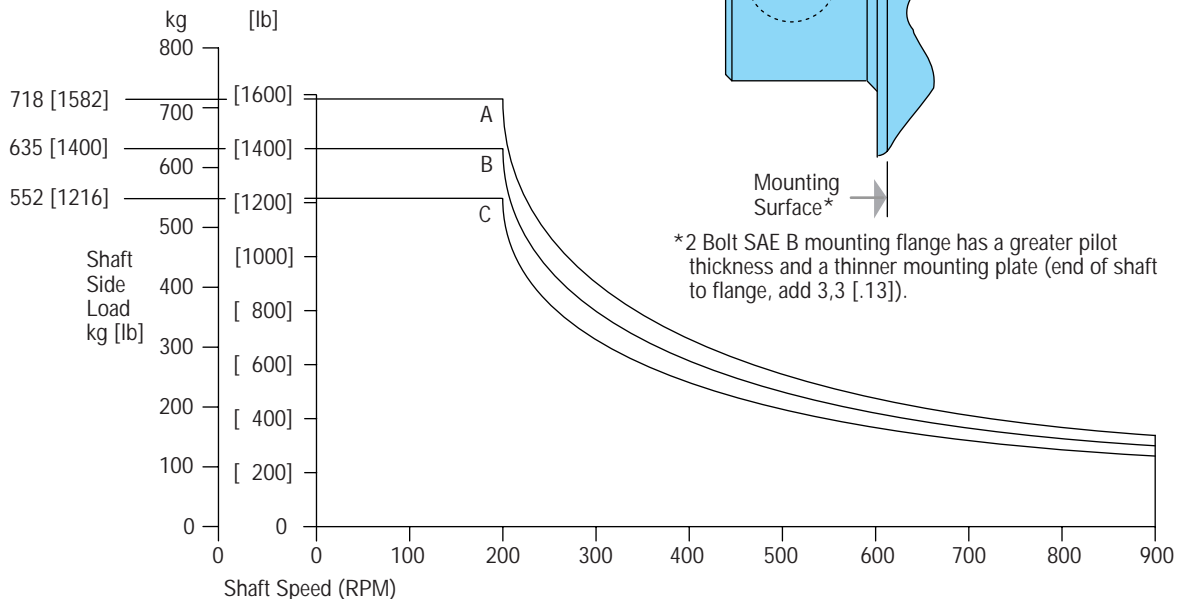


Dimensions — Shafts

H, S, and T Series


Shaft Size /Motor Torque Combination Limit Guide

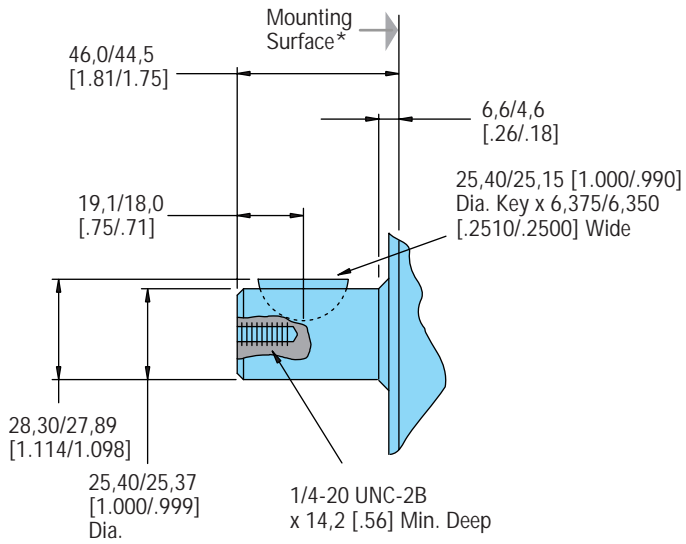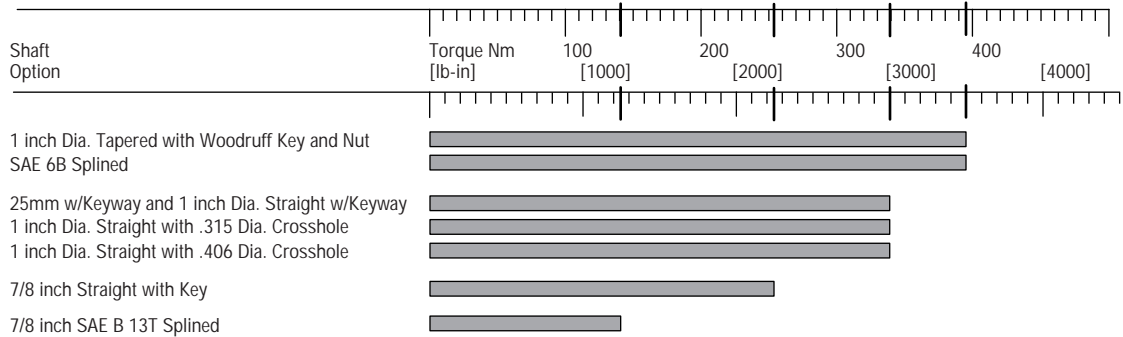


1 in. Dia. Straight with Woodruff Key

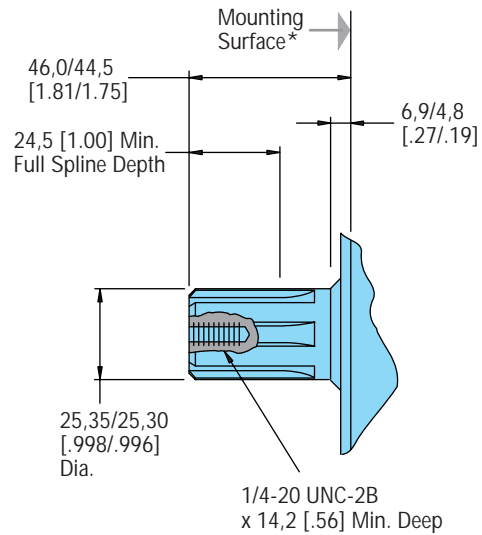

SAE 6B Splined Shaft

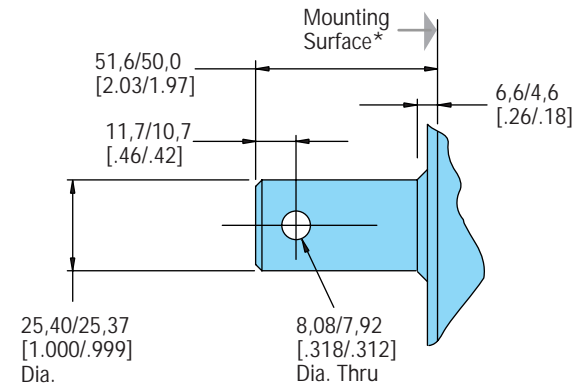

1 in. Dia. Straight Shaft with .315 Dia. Crosshole

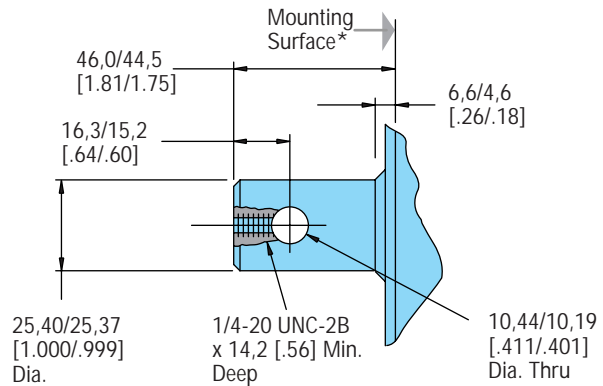


1 in. Dia. Straight Shaft with .406 Dia. Crosshole


*2 Bolt SAE B mounting flange has a greater pilot thickness and a thinner mounting plate (end of shaft to flange, add 3,3 [.13]).

Dimensions — Shafts


H, S and T Series

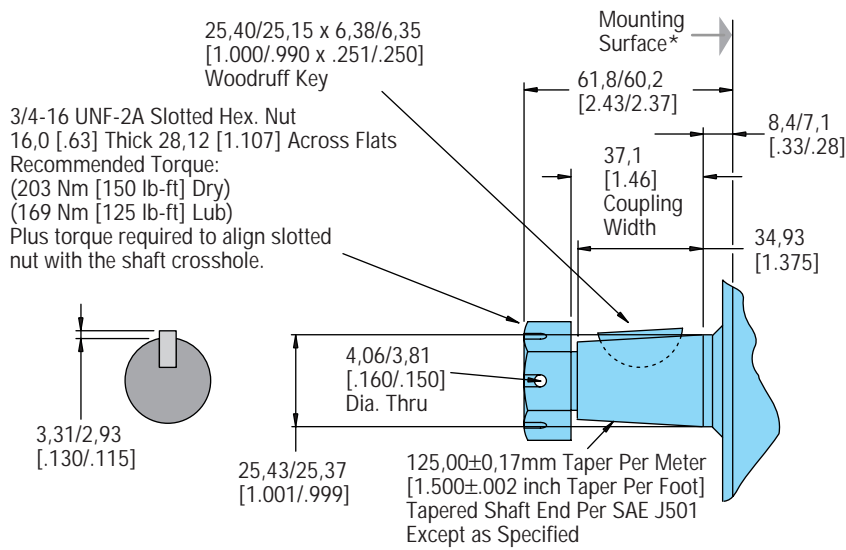


1 in. Dia. Tapered Shaft with Woodruff Key and Nut

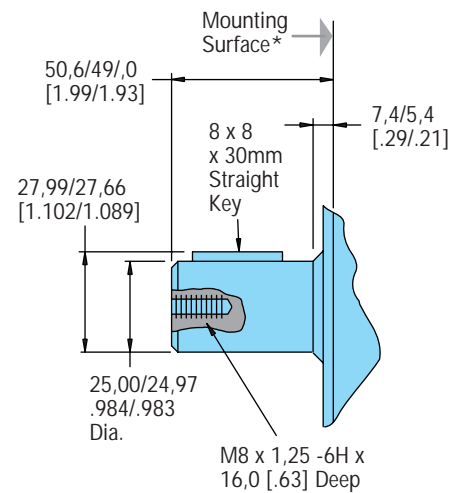

25mm Dia. Straight Shaft with 8mm Keyway

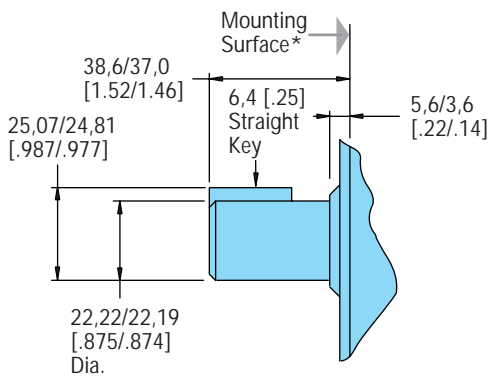

7/8 in. Dia. Straight Shaft with Key




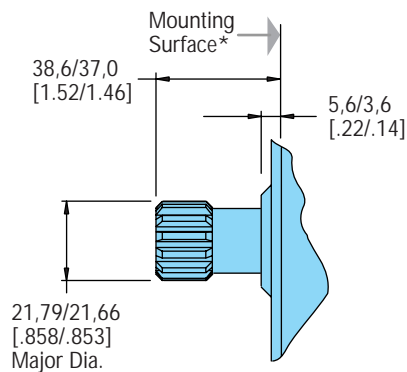


7/8 in. Dia. SAE B Shaft 13 T Splined


*2 Bolt SAE B mounting flange has a greater pilot thickness and a thinner mounting plate (end of shaft to flange, add 3,3 [.13]).

Dimensions — Mounting Options H, S, and T Series


Note: Mounting Surface Flatness Requirement is ∇ , 13 mm [.005 inch] Max.

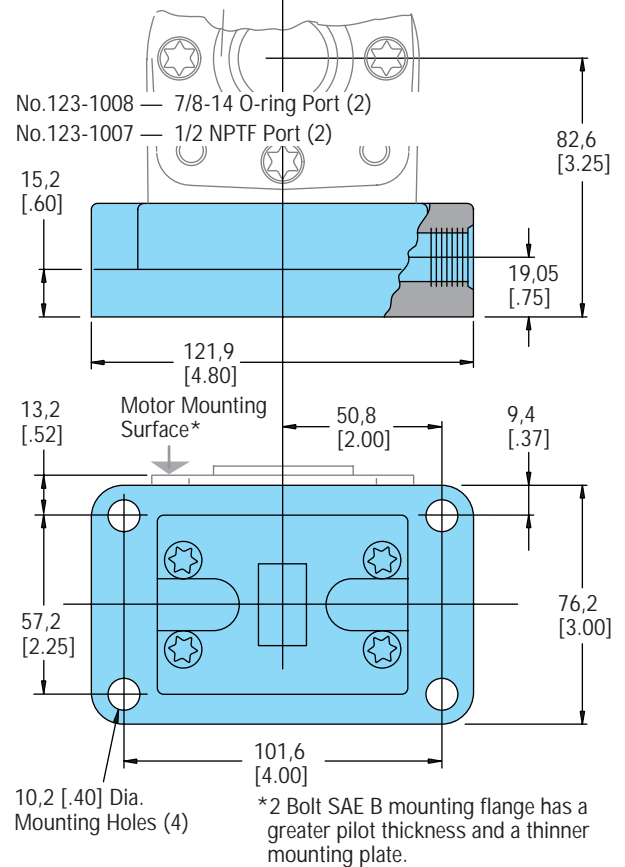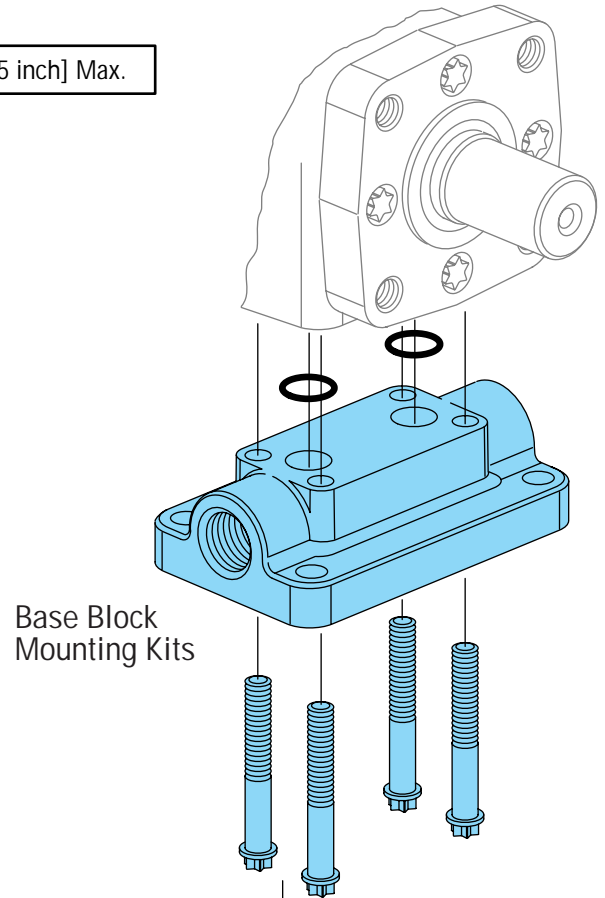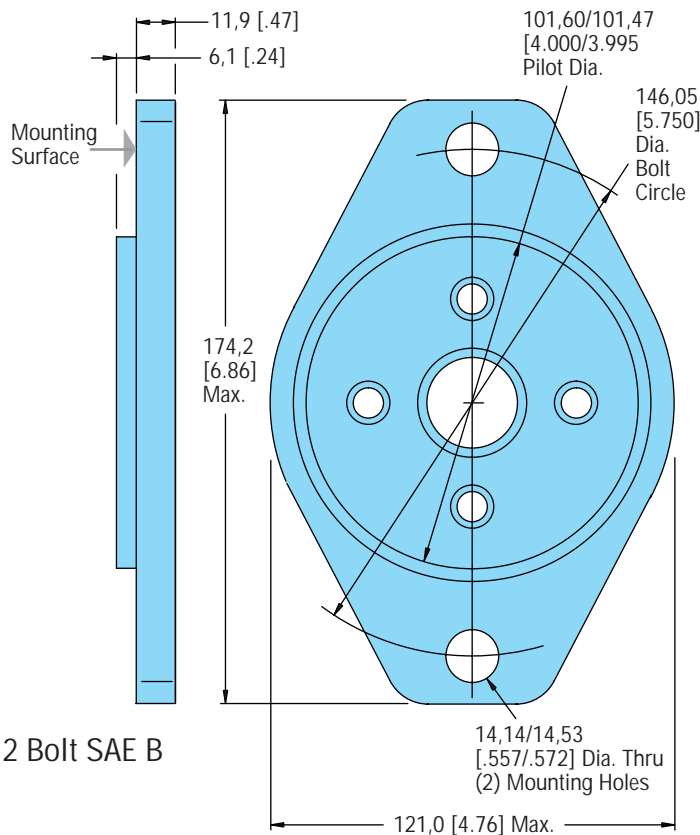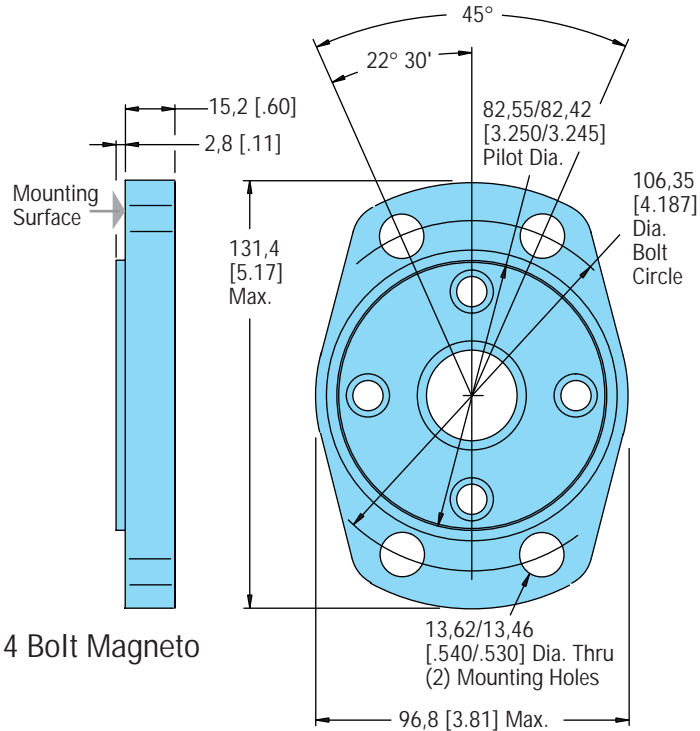


Dimensions — Ports H, S, and T Series

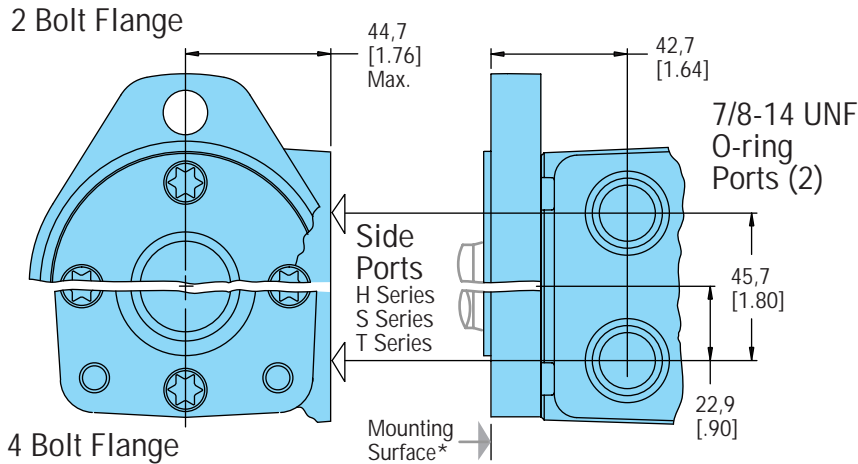

End Ports — H Series G 1/2 (BSP) (2) or 3/4-16 O-ring (2)

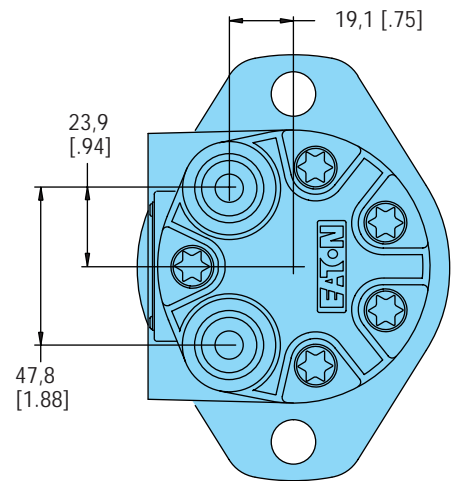




Use of Teflon Tape Sealant/Lubricant (with 1/2 14 NPTF Port Connectors only).
When using fittings with Teflon tape, be careful when taping and tightening. Over tightening or

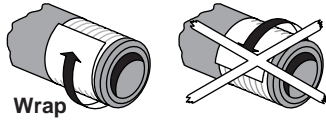

improperly taped fittings can cause damage to housing or leakage.

Use the following procedures:

- Wrap approx. 1 1/2 Turns of 13 mm [1/2 in.] wide Teflon Tape around fitting threads — start tape 2 threads up from end of fitting.
- Tighten threads to a Maximum of 34 Nm [25 lb-ft]. — **Do Not Tighten Further** —
- If fittings leak when tightened to maximum torque, either retape, reseal, or replace fittings.

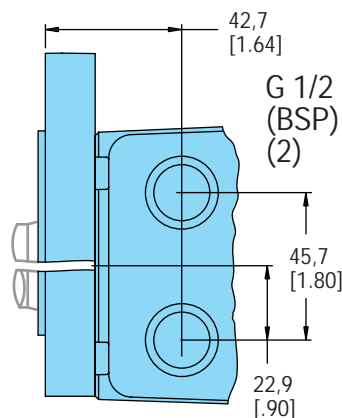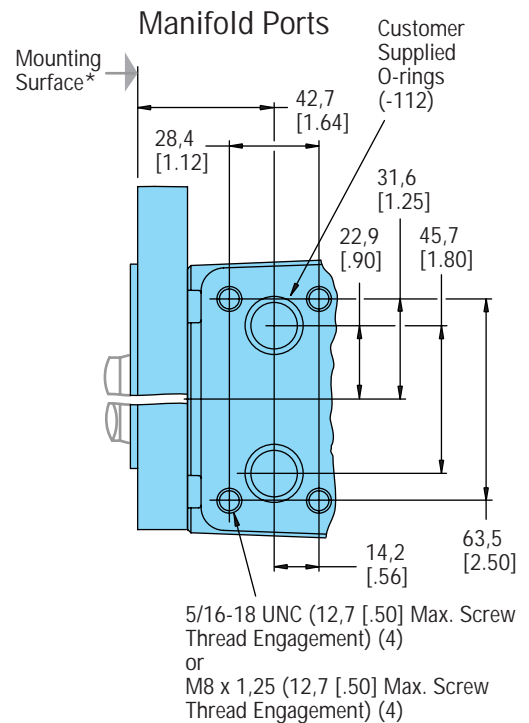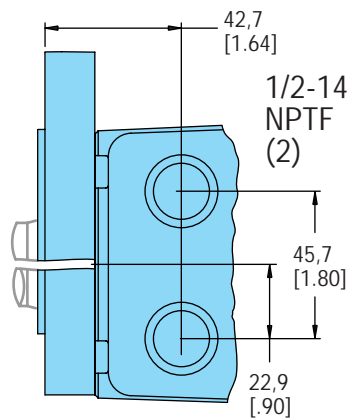

*2 Bolt SAE B mounting flange has a greater pilot thickness and a thinner mounting plate.



Case Pressure and Case Drain — H, S, and T Series

Series or Parallel Connection


Hydraulic lines bringing pressurized fluid from the pump to the motor and return flow from the motor back to tank can be flexible or rigid. One pump can be sized to supply a single motor or many motors. Furthermore, one pump and multiple motors can be connected in series or in parallel (see each type of connection shown below). When connecting the pump to the motors in series excess internal case pressure is created in the motor, this excess pressure must be ported back to tank. However, when making a parallel connection from the pump to the motors no excess case pressure will be added. Hence, using the case drain ports are not necessary. Meanwhile, take a look at the application and see if this optional case drain port can be connected to your advantage, whether it be a single motor to pump connection, multiple motors connected to pump in parallel, as well as multiple motors connected to pump in series...

...Case Drain Advantage — In addition to providing lower case pressures for motors connected in series, there are advantages for adding an external case drain line to motors with normal case pressures as well. These advantages are: Contamination Control — flushing the motor case. Cooler System — exiting oil draws motor heat away. Extend Motor Seal Life — maintain low case pressure with a preset restriction installed in the case drain line (see page 35).


Motors ordered with case drain port will be shipped with steel hex socket plug installed in that end cap drain port.

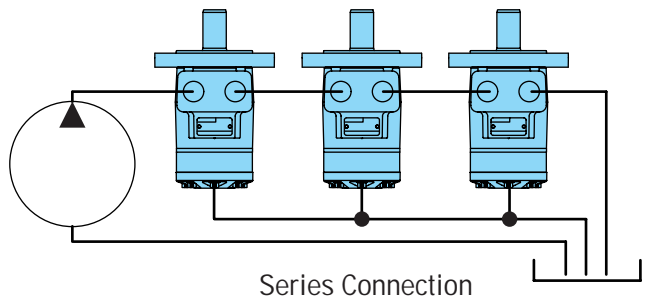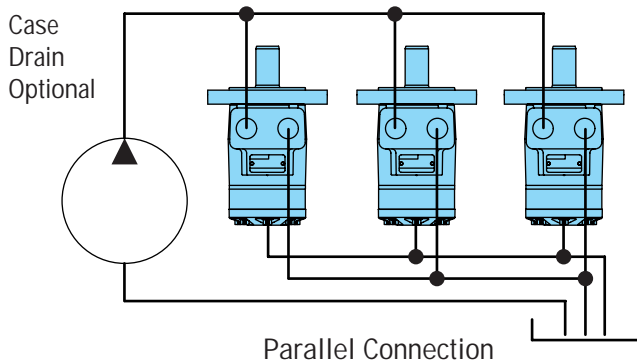


H Series with Case Drain Port — G 1/4 (BSP) or 7/16-20 O-ring

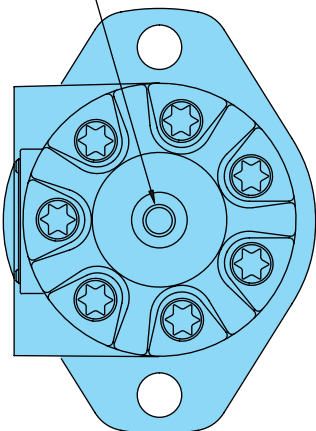


H Series with End Ports and Case Drain Port — G 1/4 (BSP) or 7/16-20 O-ring

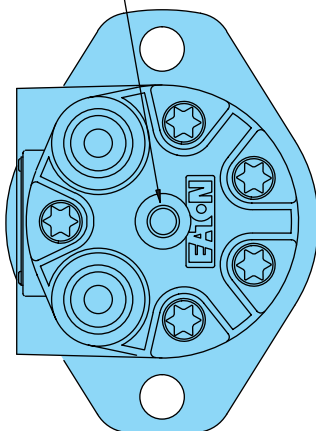

S Series with Case Drain Port — G 1/4 (BSP) or 7/16-20 O-ring




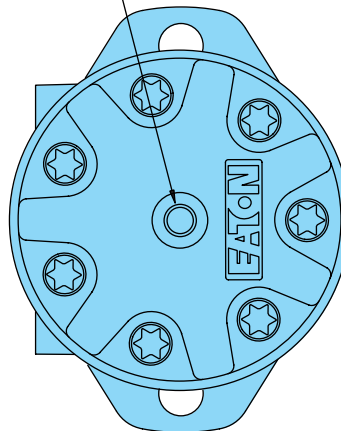


T Series with Case Drain Port — G 1/4 (BSP) or 7/16-20 O-ring

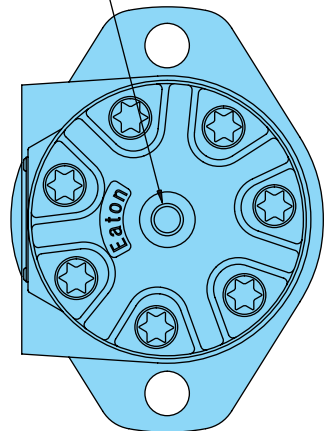


Case Pressure and Case Drain — H, S, and T Series

Char-Lynn H Series, S Series and T Series motors are durable and have long life as long as the recommended case pressure is not exceeded. Allowable case pressure is highest at low shaft speeds. Consequently, motor life will be shortened if case pressure exceeds these ratings (acceptability may vary with application). Determine if an external case drain is required from the case pressure seal limitation chart below — chart based on case pressure and shaft speed. If a case drain line is needed, connect drain line to assure that the motor will always remain full of fluid. A pressure restriction should be added to the case drain line, during which a motor case pressure of 3,5 Bar [50 PSI] is maintained.

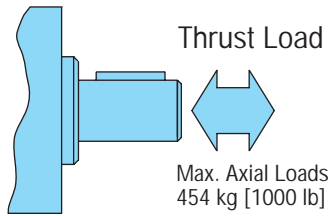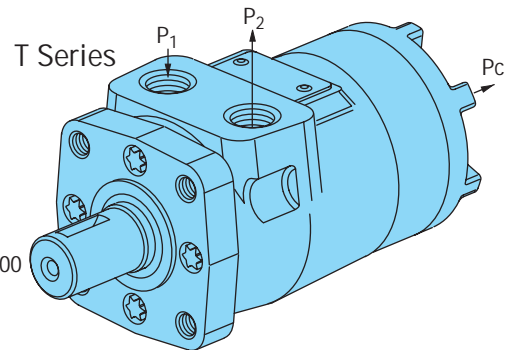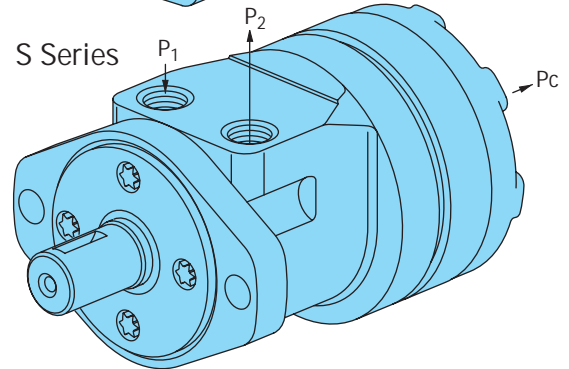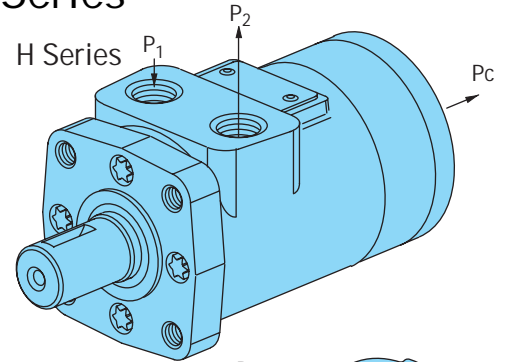

$$P_C \approx .6\Delta P + P_2$$

P_C = Case Pressure
 P_1 = Inlet Line Pressure
 P_2 = Back Pressure
 $\Delta P = P_1 - P_2$

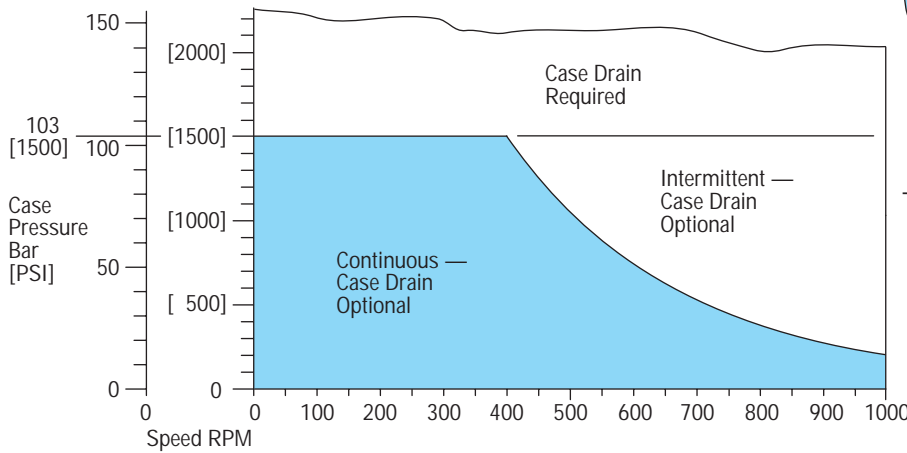




Case Pressure Seal Limitation

Speed Sensor — H Series and T Series

Eaton has developed a speed sensor specifically designed for LSHT motors. The design is rugged and fully protected against accidental reverse polarity or short circuit hookup. A built-in pull-up resistor simplifies installation with control systems.

This sensor is fully compatible with mobile vehicle electrical systems and gives a reliable digital on/off signal over a wide speed range and temperature range.

Supply Voltage: 8 to 24 Vdc (compatible with 12V vehicle systems)
 Supply Current: 20 mA max. (Vs) (including internal pull-up resistor)
 Output Voltage: Low < .5 Vdc @ 10 mA; output is open collector with 10kΩ pull-up resistor
 Connection — std. 3 prong Weatherpack connector with 18 AWG (american wire gage) cables:
 Position A (red) = power supply Position B (wht) = signal output Position C (blk) = common
 Output — digital on/off signal from Hall Effect switch; 15 pulses /revolution

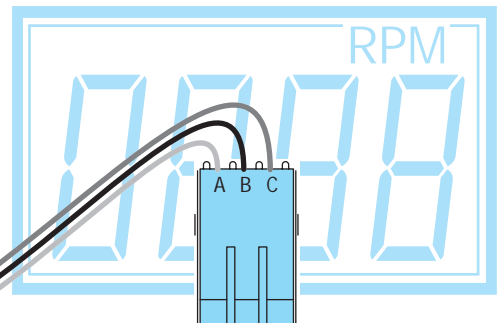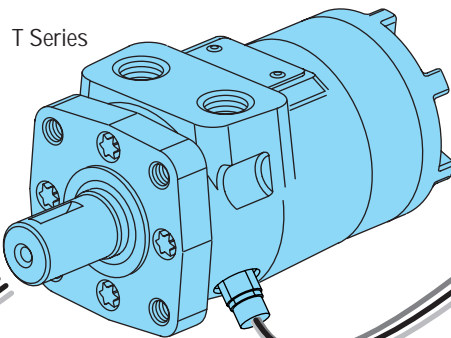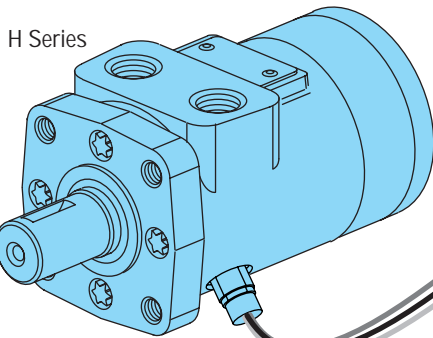

Note: The speed sensor option does NOT include read-out display. Possible sources for read-out display include: Eaton Corporation Durant Products 901 South 12 Street Watertown, WI 57094 — Phone 1-800-289-3866.

Fluid Recommendations

H, S, and T Series

Introduction

The ability of Eaton hydraulic components to provide the desired performance and life expectancy depends largely on the fluid used. The purpose of this section is to provide readers with the knowledge required to select the appropriate fluids for use in systems that employ Eaton hydraulic components.

One of the most important characteristic to consider when choosing a fluid to be used in a hydraulic system is viscosity. Viscosity choice is always a compromise; the fluid must be thin enough to flow easily but thick enough to seal and maintain a lubricating film between bearing and sealing surfaces. Viscosity requirements, see chart below.

Viscosity and Temperature

Fluid temperature affects viscosity. In general, as the fluid warms it gets thinner and its viscosity decreases. The opposite is true when fluid cools. When choosing a fluid, it is important to consider the start-up and operating temperatures of the hydraulic system. Generally, the fluid is thick when the hydraulic system is started. With movement, the fluid warms to a point where a cooling system begins to operate. From then on, the fluid is maintained at the temperature for which the hydraulic system was designed. In actual applications this sequence varies; hydraulic systems are used in many environments from very cold to very hot. Cooling systems also vary from very elaborate to very simple, so ambient temperature may affect operating temperature. Equipment manufacturers who use Eaton hydraulic components in their products should anticipate temperature in their designs and make the appropriate fluid recommendations to their customers.

Cleanliness

Cleanliness of the fluid in a hydraulic system is extremely important. Eaton recommends that the fluid used in its hydraulic components be maintained at ISO Cleanliness Code 18/13 per SAE J1165. This code allows a maximum of 2500 particles per milliliter greater than 5 µm and a maximum of 80 particles per milliliter greater than 15 µm. Cleanliness requirements for specific products are given in the table below. OEM's and distributors who use Eaton hydraulic components in their

products should provide for these requirements in their designs. A reputable filter supplier can supply filter information.

Fluid Maintenance

Maintaining correct fluid viscosity and cleanliness level is essential for all hydraulic systems. Since Eaton hydraulic components are used in a wide variety of applications it is impossible for Eaton to publish a fluid maintenance schedule that would cover every situation. Field testing and monitoring are the only ways to get accurate measurements of system cleanliness. OEM's and distributors who use Eaton hydraulic components should test and establish fluid maintenance schedules for their products. These maintenance schedules should be designed to meet the viscosity and cleanliness requirements laid out in this document.

Fluid Selection

Premium grade petroleum based hydraulic fluids will provide the best performance in Eaton hydraulic components. These fluids typically contain additives that are beneficial to hydraulic systems. Eaton recommends fluids that contain anti-wear agents, rust inhibitors, anti-foaming agents, and oxidation inhibitors. Premium grade petroleum based hydraulic fluids carry an ISO VG rating.

SAE grade crankcase oils may be used in systems that employ Eaton hydraulic components, but it should be noted that these oils may not contain all of the recommended additives. This means using crankcase oils may increase fluid maintenance requirements.

Hydraulic fluids that contain V.I. (viscosity index) improvers, sometimes called multi-viscosity oils, may be used in systems that employ Eaton hydraulic components. These V.I. improved fluids are known to "shear-down" with use. This means that their actual viscosity drops below the rated value. Fluid maintenance must be increased if V.I. improved fluids are used. Automotive automatic transmission fluids contain V.I. improvers.

Synthetic fluids may be used in Eaton hydraulic components. A reputable fluid supplier can provide information on synthetic fluids. Review applications that require the use of synthetic fluids with your Eaton representative.

Product Line	Viscosity		ISO Cleanliness Requirements
	Minimum	Best Range	
S Series and T Series	70 SUS 13 cSt	100-200 SUS 20-43 cSt	18/13
H Series	100 SUS 20 cSt	100-200 SUS 20-43 cSt	18/13

Additional Notes:

- Fluids too thick to flow in cold weather start-ups will cause pump cavitation and possible damage. Motor cavitation is not a problem during cold start-ups.
- When choosing a hydraulic fluid, all the components in the system must be considered and the best viscosity range adjusted accordingly. For example, when a medium duty piston pump is combined with a Geroler motor the best viscosity range becomes 100 - 150 SUS [20 - 32 cSt] and viscosity should never fall below 70 SUS [13 cSt].

- If the natural color of the fluid has become black it is possible that an overheating problem exists.
- If the fluid becomes milky a water contamination problem may exist.
- Take fluid level reading when the system is cold.
- Contact your Eaton representative if you have specific questions about the fluid requirements of Eaton hydraulic components.

Model Code for H Series Motors

The following 16-digit coding system has been developed to identify all of the configuration options for the H Series Motor. Use this model code to specify a motor with the desired features. All 16-digits of the code must be present when ordering. You may want to photocopy the matrix below to ensure that each number is entered in the correct box.

Model Code — H Series Spool Valve Motors

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
M	0	H												0	0

Position 1 Product Series

M Motor

Position 2, 3 H Series

0H H Series

Position 4, 5 Displacement cm³/r [in³/r]

02 36 [2.2]*

03 46 [2.8]

04 59 [3.6]*

05 74 [4.5]

06 97 [5.9]

07 120 [7.3]

09 146 [8.9]

10 159 [9.7]

11 185 [11.3]

14 231 [14.1]

18 293 [17.9]

23 370 [22.6]

45 739 [45.1]

Position 6 Mounting Flange

A 2 Bolt (Standard) 82,6 [3.25] Pilot Dia. and 13,59 [.535] Dia. Mounting Holes 106,2 [4.18] Dia. B.C.

B 4 Bolt (Standard) 44,4 [1.75] Pilot Dia. and 3/8-16 Mounting Holes 82,6 [3.25] Dia. B.C.

E 4 Bolt (Standard) 44,4 [1.75] Pilot Dia. and M10 x 1,5 Mounting Holes 82,6 [3.25] Dia. B.C.

H 2 Bolt (Std.) 101,6 [4.00] Pilot Dia. and 14,35 [.565] Dia. Mounting Holes 146,0 [5.75] Dia. B.C. (SAE B)

K 4 Bolt Magneto 82,6 [3.25] Pilot Dia. and 13,59 [.535] Dia. Mounting Holes 106,2 [4.18] Dia. B.C.

Position 7, 8 Output Shaft

01 1 inch Dia. Straight with Woodruff Key and 1/4-20 Threaded Hole

02 1 inch Dia. SAE 6B Splined with 1/4-20 Threaded Hole

07 1 inch Dia. Straight with 7,9 [.31] Dia. Crosshole 11,2 [.44] from End

08 1 inch Dia. Straight with 10,2 [.40] Dia. Crosshole 15,7 [.62] from End and 1/4-20 Threaded Hole

16 7/8 inch Dia. SAE B 13T Splined

17 7/8 inch Dia. SAE B Straight with Square Key

18 1 inch Dia. Tapered with Woodruff Key and Nut

24 25mm Dia. Straight with 8mm Key and 8mm x 1,2 Threaded Hole

27 1 inch Dia. Straight with Woodruff Key and 1/4-20 Threaded Hole (Plated for Corrosion Protection)

29 25mm Dia. Straight with 8mm x 1.2 Threaded Hole (Plated for Corrosion Protection)

32 1 inch Dia. Straight with 10,2 [.40] Dia. Crosshole 15,7 [.62] from End and 1/4-20 Threaded Hole (Plated...)

33 1 inch Dia. Tapered with Woodruff Key and Nut (Plated for Corrosion Protection)

Position 9 Port Type

A 7/8-14 O-ring

B 1/2-14 NPTF

C Manifold (5/16-18 Mounting Threads)

D Manifold (M8 x 1,25 Mounting Threads)

E G 1/2 (BSP)

G 3/4-16 End Ported

K G 1/2 (BSP) End Ported

Position 10 Case Drain

0 No Case Drain

1 7/16-20 O-ring Port End Cap

2 G 1/4 (BSP) End Cap

Position 11, 12 Special Features (Hardware)

00 None

AA Free Running Gerotor

AB Low Speed Valve

AC Viton Shaft Seal

BW Internal Check Valves

BZ Speed Sensor

AM Free Running Gerotor, Low Speed Valve

DS High Pressure Shaft Seal

Position 13 Special Features (Assembly)

0 None

1 Reverse Rotation

2 Flange Rotated 90°

Position 14 Paint/Special Packaging

0 No Paint

A Painted Low Gloss Black (Standard)

D Corrosion Protected

Position 15 Eaton Assigned Code when Applicable

0 Assigned Code

Position 16 Eaton Assigned Design Code

0 Design Code

*The H Series motors with displacement code "02" or "04" must also specify free running gerotor (option "AA" in positions 11, 12).

Model Code for S Series Motors

The following 16-digit coding system has been developed to identify all of the configuration options for the S Series Motor. Use this model code to specify a motor with the desired features. All 16-digits of the code must be present when ordering. You may want to photocopy the matrix below to ensure that each number is entered in the correct box.

Model Code — S Series Spool Valve Motors

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
M	0	S												0	0

Position 1 Product Series

M Motor

Position 2, 3 S Series

0S S Series

Position 4, 5 Displacement cm³/r [in³/r]

04 59 [3.6]

05 74 [4.5]

06 97 [5.9]

07 120 [7.3]

09 146 [8.9]

10 159 [9.7]

11 185 [11.3]

10 159 [9.7]

14 231 [14.1]

18 293 [17.9]

23 370 [22.6]

Position 6 Mounting Flange

A 2 Bolt (Standard) 82,6 [3.25] Pilot Dia. and 13,59 [.535] Dia. Mounting Holes 106,2 [4.18] Dia. B.C.

B 4 Bolt (Standard) 44,4 [1.75] Pilot Dia. and 3/8-16 Mounting Holes 82,6 [3.25] Dia. B.C.

E 4 Bolt (Standard) 44,4 [1.75] Pilot Dia. and M10 x 1,5 Mounting Holes 82,6 [3.25] Dia. B.C.

H 2 Bolt (Std.) 101,6 [4.00] Pilot Dia. and 14,35 [.565] Dia. Mounting Holes 146,0 [5.75] Dia. B.C. (SAE B)

K 4 Bolt Magneto 82,6 [3.25] Pilot Dia. and 13,59 [.535] Dia. Mounting Holes 106,2 [4.18] Dia. B.C.

Position 7, 8 Output Shaft

01 1 inch Dia. Straight with Woodruff Key and 1/4-20 Threaded Hole

02 1 inch Dia. SAE 6B Splined with 1/4-20 Threaded Hole

07 1 inch Dia. Straight with 7,9 [.31] Dia. Crosshole 11,2 [.44] from End

08 1 inch Dia. Straight with 10,2 [.40] Dia. Crosshole 15,7 [.62] from End and 1/4-20 Threaded Hole

16 7/8 inch Dia. SAE B 13T Splined

17 7/8 inch Dia. SAE B Straight with Square Key

18 1 inch Dia. Tapered with Woodruff Key and Nut

24 25mm Dia. Straight with 8mm Key and 8mm x 1.2 Threaded Hole

27 1 inch Dia. Straight with Woodruff Key and 1/4-20 threaded Hole (Coated for Corrosion Protection)

Position 9 Port Type

A 7/8-14 O-ring

B 1/2-14 NPTF

C Manifold (5/16-18 Mounting Threads)

D Manifold (M8 x 1,25 Mounting Threads)

E G 1/2 (BSP) End Cap

Position 10 Case Drain

0 No Case Drain

1 7/16-20 O-ring Port End Cap

2 G 1/4 (BSP) End Cap

Position 11, 12 Special Features (Hardware)

00 None

AB Low Speed Valve

AC Viton Shaft Seal

BZ Speed Sensor

DS High Pressure Shaft Seal

Position 13 Special Features (Assembly)

0 None

1 Reverse Rotation

2 Flange Rotated 90°

Position 14 Paint/Special Packaging

0 No Paint

A Painted Low Gloss Black (Standard)

D Corrosion Protected

Position 15 Eaton Assigned Code when Applicable

0 Assigned Code

Position 16 Eaton Assigned Design Code

0 Design Code

Model Code for T Series Motors

The following 16-digit coding system has been developed to identify all of the configuration options for the T Series Motor. Use this model code to specify a motor with the desired features. All 16-digits of the code must be present when ordering. You may want to photocopy the matrix below to ensure that each number is entered in the correct box.

Model Code — T Series Spool Valve Motors

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
M	0	T												0	0

Position 1 Product Series

M Motor

Position 2, 3 T Series

OT T Series

Position 4, 5 Displacement cm³/r [in³/r]

02 36 [2.2]

03 49 [3.0]

04 66 [4.0]

05 80 [4.9]

06 102 [6.2]

08 131 [8.0]

10 157 [9.6]

12 195 [11.9]

15 244 [14.9]

19 306 [18.7]

23 370 [22.6]

Position 6 Mounting Flange

A 2 Bolt (Standard) 82,6 [3.25] Pilot Dia. and 13,59 [.535] Dia. Mounting Holes 106,2 [4.18] Dia. B.C.

B 4 Bolt (Standard) 44,4 [1.75] Pilot Dia. and 3/8-16 Mounting Holes 82,6 [3.25] Dia. B.C.

E 4 Bolt (Standard) 44,4 [1.75] Pilot Dia. and M10 x 1,5 Mounting Holes 82,6 [3.25] Dia. B.C.

H 2 Bolt (Std.) 101,6 [4.00] Pilot Dia. and 14,35 [.565] Dia. Mounting Holes 146,0 [5.75] Dia. B.C. (SAE B)

K 4 Bolt Magneto 82,6 [3.25] Pilot Dia. and 13,59 [.535] Dia. Mounting Holes 106,2 [4.18] Dia. B.C.

Position 7, 8 Output Shaft

01 1 inch Dia. Straight with Woodruff Key and 1/4-20 Threaded Hole

02 1 inch Dia. SAE 6B Splined with 1/4-20 Threaded Hole

07 1 inch Dia. Straight with 7,9 [.31] Dia. Crosshole 11,2 [.44] from End

08 1 inch Dia. Straight with 10,2 [.40] Dia. Crosshole 15,7 [.62] from End and 1/4-20 Threaded Hole

16 7/8 inch Dia. SAE B 13T Splined

17 7/8 inch Dia. SAE B Straight with Square Key

18 1 inch Dia. Tapered with Woodruff Key and Nut

24 25mm Dia. Straight with 8mm Key and 8mm x 1.2 Threaded Hole

27 1 inch Dia. Straight with Woodruff Key and 1/4-20 Threaded Hole (Plated for Corrosion Protection)

Position 9 Port Type

A 7/8-14 O-ring

B 1/2-14 NPTF

C Manifold (5/16-18 Mounting Threads)

D Manifold (M8 x 1,25 Mounting Threads)

E G 1/2 (BSP) End Cap

Position 10 Case Drain

0 No Case Drain

1 7/16-20 O-ring Port End Cap

2 G 1/4 (BSP) End Cap

Position 11, 12 Special Features (Hardware)

00 None

AB Low Speed Valve

AC Viton Shaft Seal

BW Internal Check Valves

BZ Speed Sensor

DS High Pressure Shaft Seal

Position 13 Special Features (Assembly)

0 None

1 Reverse Rotation

2 Flange Rotated 90°

Position 14 Paint/Special Packaging

0 No Paint

A Painted Low Gloss Black (Standard)

D Corrosion Protected

Position 15 Eaton Assigned Code when Applicable

0 Assigned Code

Position 16 Eaton Assigned Design Code

0 Design Code

